

4-8GHz Broadband 180° Hybrid

P/N: MZH80408GA



■ Features

- Ultra Broadband
- Low Insertion Loss
- High Isolation
- Rush Delivery
- Fast Response
- Customization Available Upon Request

■ Applications

- Radar Systems
- Communication Systems
- Receiving Systems



■ Electrical Specifications

Parameter	Min.	Typ.	Max.	Units
Frequency Range	4-8			GHz
Insertion Loss		0.6	0.8	dB
Isolation	15	18		dB
VSWR		1.3	1.5	-
Amplitude Unbalance			± 0.5	dB
Phase Unbalance			± 10	°
Power Handle Capability	30			W
Weight	/			g
Impedance	50			Ω
Input Connector	SMA-FEMALE			
Output Connector	SMA-FEMALE			
Material	Aluminum			
Finishing	Epoxy Paint(Blue Color)			

MICZEN THCNOLOGIES CO.,LTD.

Tel: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

4-8GHz Broadband 180° Hybrid

P/N: MZH80408GA




■ Environmental Conditions

Operational Temperature	-45°C~+85°C	Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msec half sine wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35°C, 95%RH at 40°C

■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

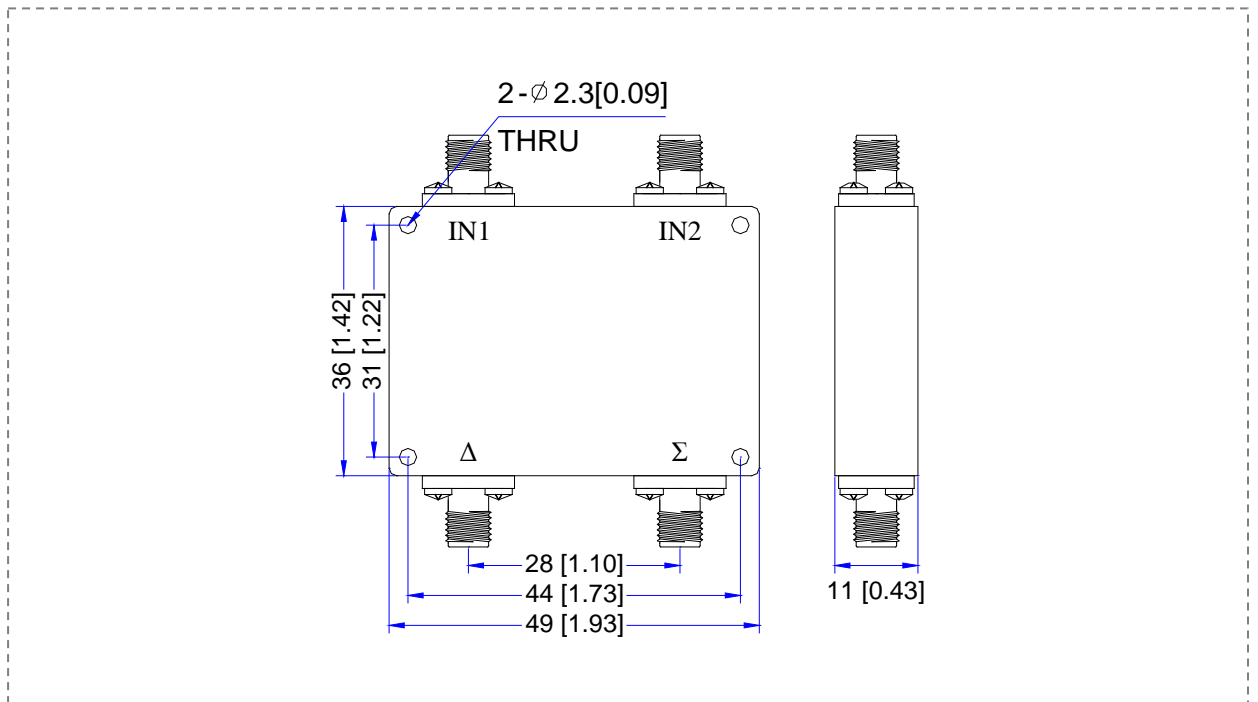

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCNOLOGIES CO.,LTD.

Tel: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com