


36-52GHz Low Noise Amplifier

P/N: MZLNA3652GA17



Description:

The amplifier is a low noise amplifier with a typical small signal gain of 20 dB and a typical noise figure of 5.0dB across the frequency range of 36 to 52 GHz. The typical output power P-1 15dBm. The DC power requirement for the amplifier is +5 VDC/200 mA. Accept customization according to different needs.

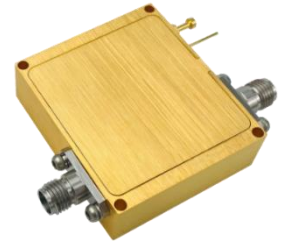

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		36-52		GHz
Gain	17	20		dB
Gain Flatness		±2.0	±3.0	dB
Input VSWR		1.8	2.5	-
Output VSWR		1.8	2.5	-
Output Power for (P1dB)	14	15		dBm
Saturated Output Power (Psat)		16		dBm
Noise Figure		5.0	6.0	dB
Output IP3		20		dBm
Input Max Power(no damage)			5	dBm
DC Current (Vcc=+5V)		200		mA
Impedance		50		Ω
Input/Output Connector		1.85-K/1.85-K		
Material		Aluminium/Gold Painting		
Weight		50g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


36-52GHz Low Noise Amplifier

P/N: MZLNA3652GA17



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

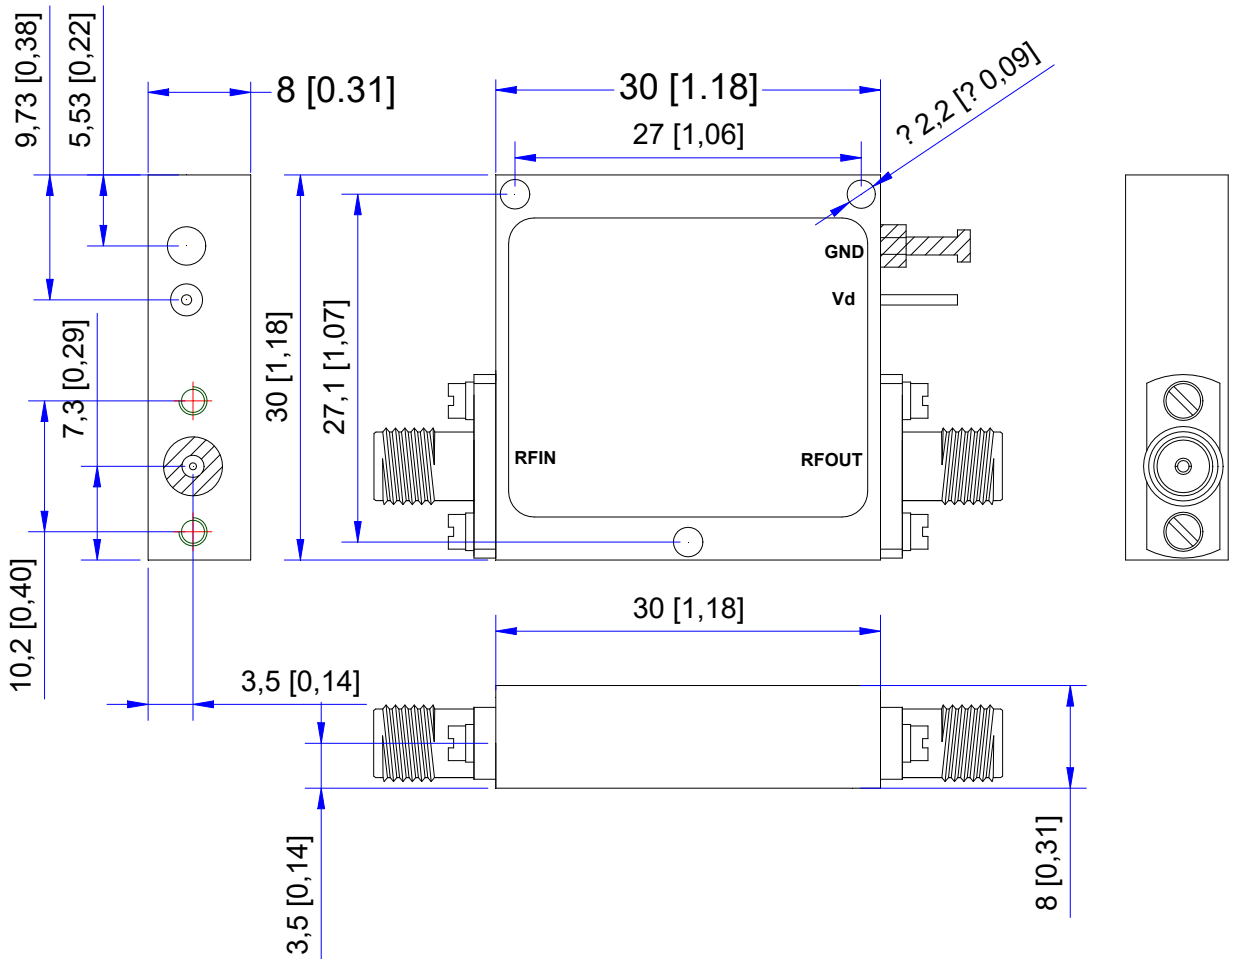

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


36-52GHz Low Noise Amplifier

P/N: MZLNA3652GA17




Performance Plot


Gain&Input VSWR&Output VSWR

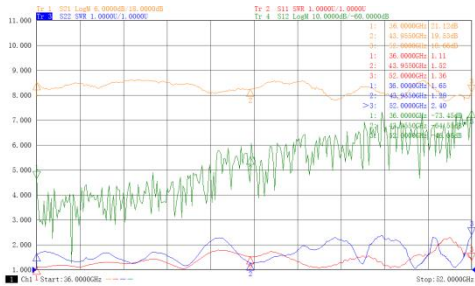


Noise Figure

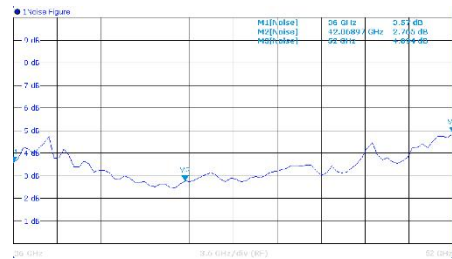

Gain vs. Pout

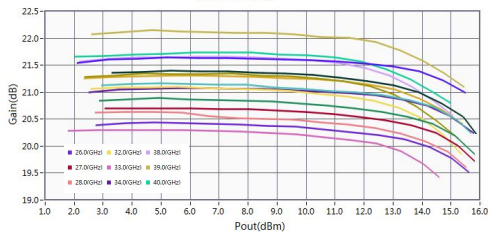

P1dB vs. Frequency

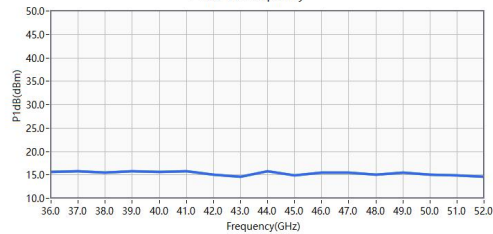

P3dB vs. Frequency

