


18-40GHz 0.5W Power Amplifier

P/N: MZPA1840GB0.5W



Description:

The power amplifier is a 0.5W power amplifier with a typical small signal gain of 33 dB across the frequency range of 18 to 40 GHz. The typical output power P-1 27dBm. The DC power requirement for the amplifier is +12 VDC/1.5 A. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		18-40		GHz
Gain	33			dB
Gain Flatness		±2.5		dB
Input VSWR		2.0		-
Output VSWR		2.0		
Output Power for (P1dB)		27		dBm
Saturated Output Power (Psat)	27	28		dBm
Spurious		-60		dBc
Input Max Power(no damage)			0	dBm
DC Current (Vcc=+12V)(@Pout=0.5W)		0.9	1.5	A
Impedance		50		Ω
Input/Output Connector	2.92mm-Female/2.92mm-Female			
Material	Aluminium\Gold Painting			
Weight	90g			
Package Sealing	General Sealing (Standard)			

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


18-40GHz 0.5W Power Amplifier

P/N: MZPA1840GB0.5W



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

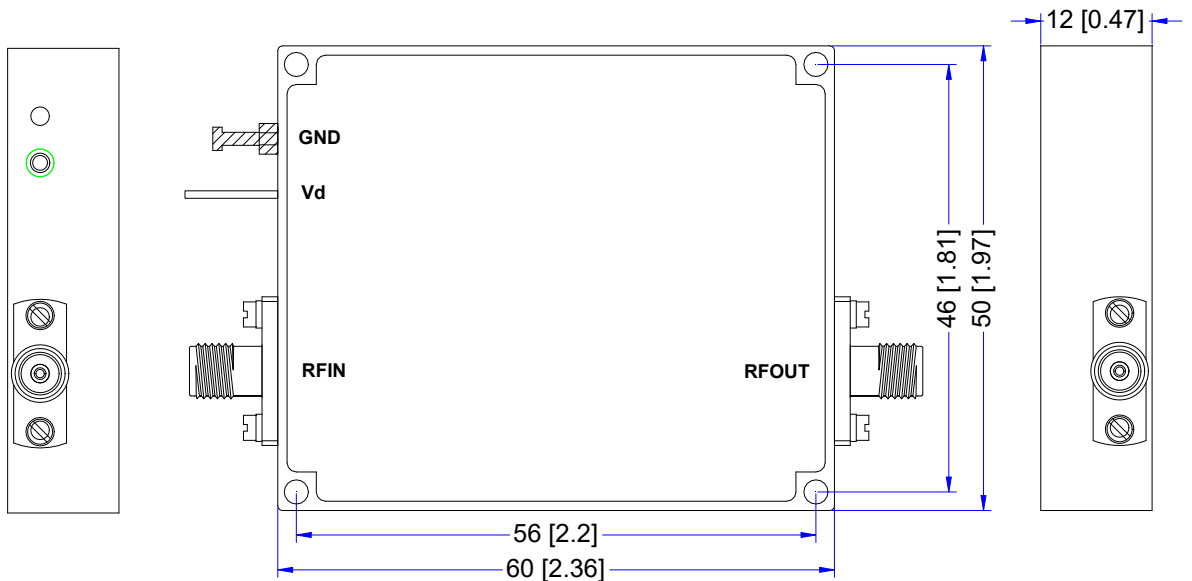

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

18-40GHz 0.5W Power Amplifier

P/N: MZPA1840GB0.5W



■ Performance Plot

