

0.5-8GHz Power Amplifier

P/N: PA005080GA0.5W



Description:

The amplifier is a Power amplifier with a typical small signal gain of 30 dB and a typical noise figure of 1.5 dB across the frequency range of 0.5 to 8 GHz. The typical output power P-1 26dBm. The DC power requirement for the amplifier is +15 VDC/480 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.5-8		GHz
Gain	30	35		dB
Gain Flatness		±1.5		dB
Input VSWR		2.5	3.5	:1
Output VSWR		1.5	1.8	:1
Output Power for (P1dB)	26	29		dBm
Saturated Output Power (Psat)		29		dBm
Spurious	60			dBc
Noise Figure		1.5	2.5	dB
Input Max Power(no damage)			0	dBm
DC Current (Vcc=+15V)		480		mA
Impedance		50		Ω
Input/Output Connector		SMA-Female/SMA-Female		
Material		Aluminium/Gold Painting		
Weight		40g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


0.5-8GHz Power Amplifier

P/N: PA005080GA0.5W



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

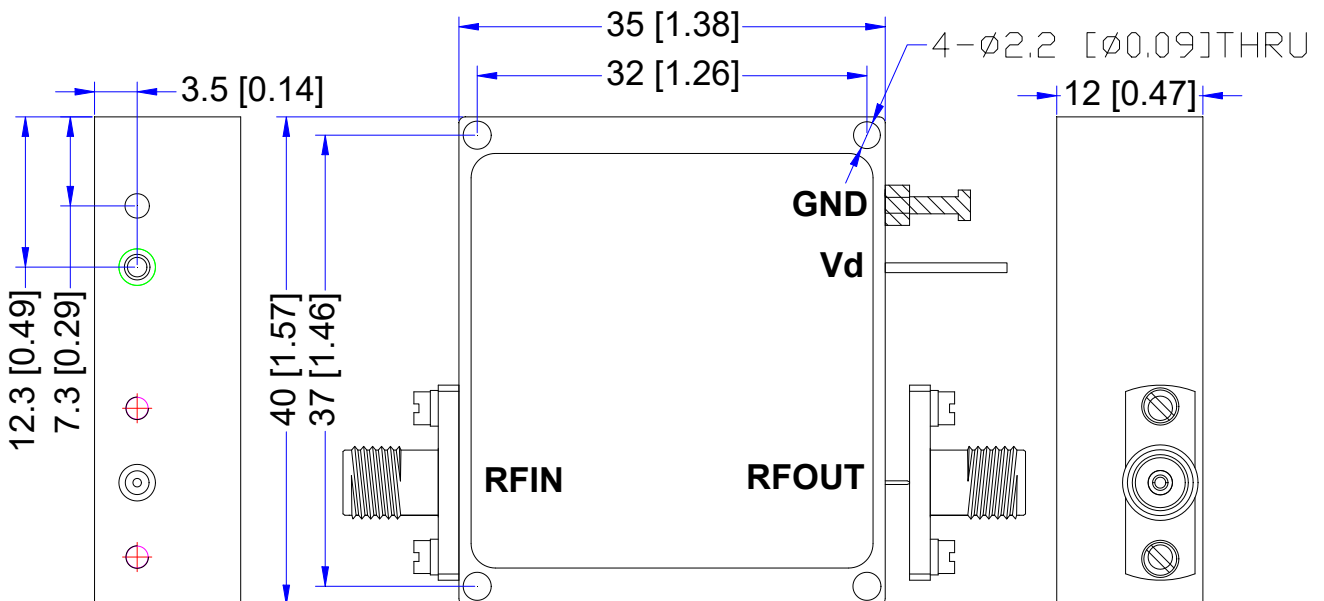

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

0.5-8GHz Power Amplifier

P/N: PA005080GA0.5W



Performance Plot

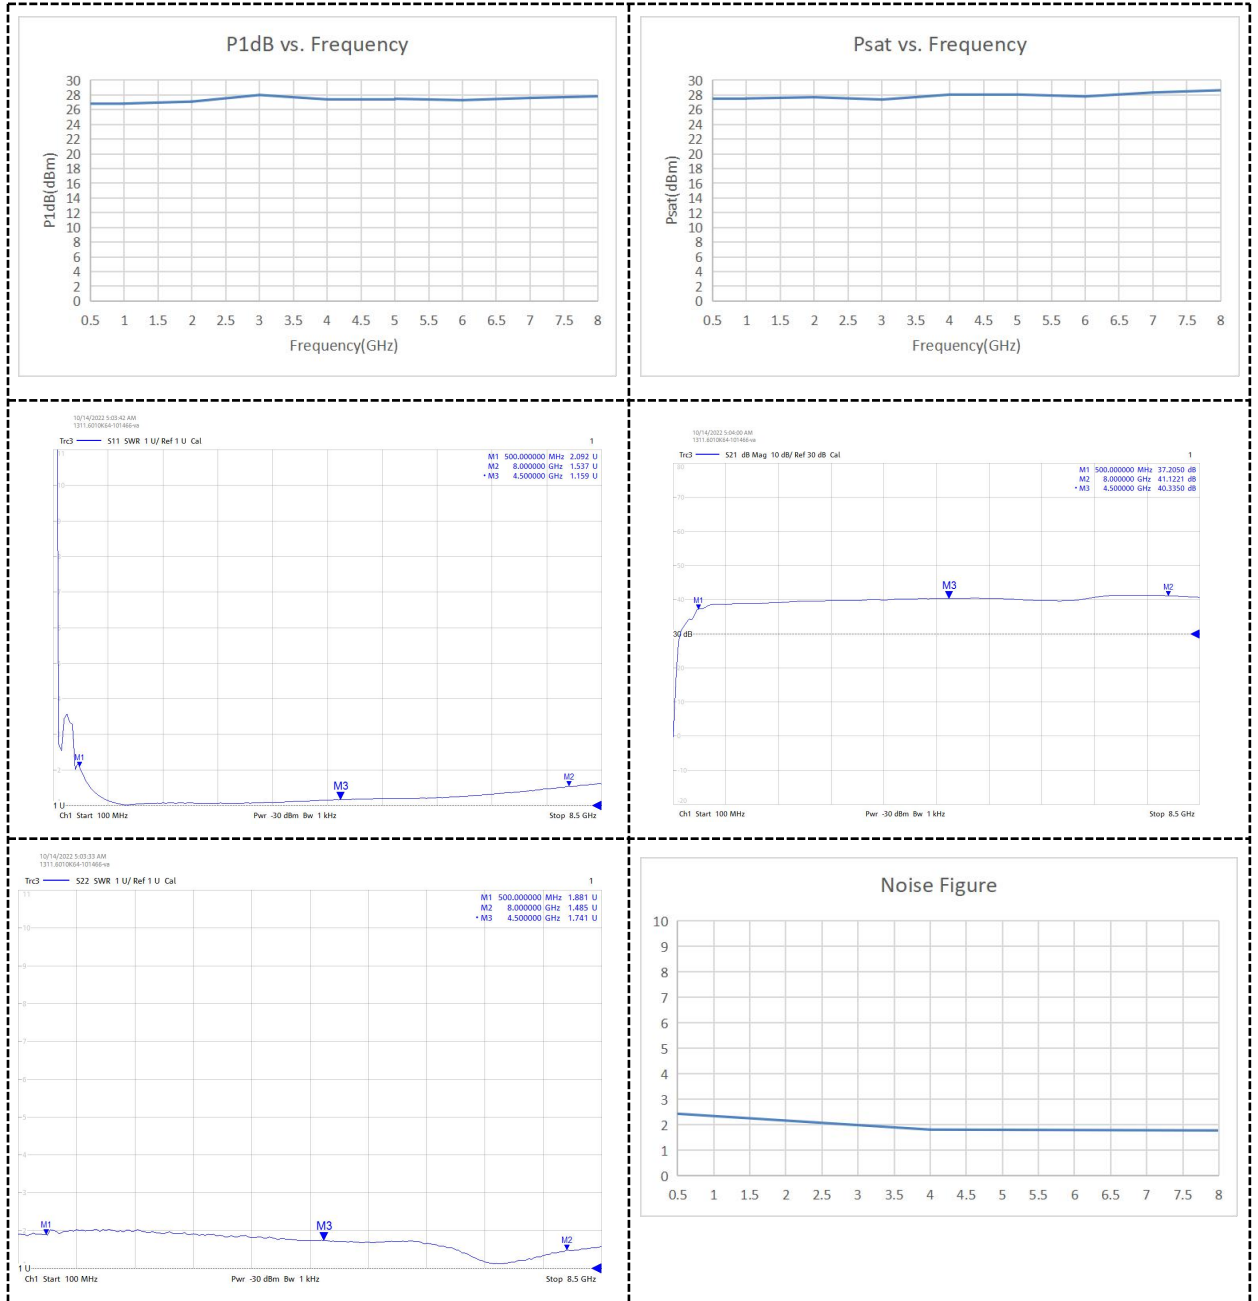

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com