

2-18GHz 6dB Directional Coupler

P/N: MZD060218GH



Description:

MZD060218GH is a 6dB single directional coupler with a typical insertion Loss of 1.7dB and a typical directivity of 14dB across the frequency range of 2 to 18GHz. The directional coupler can reach handling power 20W. Accept customization according to different needs.

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		2-18		GHz
Insertion Loss		1.7	2.0	dB
Nominal Coupling		6		dB
Coupling Accuracy		±0.7	±1.0	dB
Frequency Sensitivity		±0.9	±1.0	dB
Directivity	14			dB
VSWR		1.4	1.5	-
Power Handling		20		W
Impedance		50		Ω
Connector		SMA-Female		
Material		Aluminum		
Weight		33.8g / 1.2 Ounces Max.		
Finish		Black Paint(Standard)		

Environmental Specifications:

- ※ Operational Temperature -55°C~+85°C
- ※ Storage Temperature -55°C~+100°C



MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


2-18GHz 6dB Directional Coupler

P/N: MZD060218GH




Typical Performance (Room Temp. +25°C, RH: 50%)


IN-Port VSWR

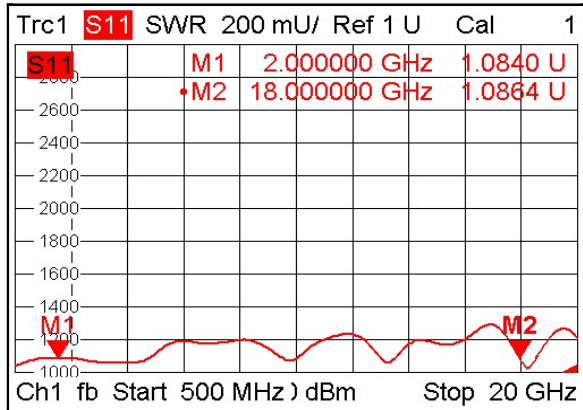


OUT-Port VSWR

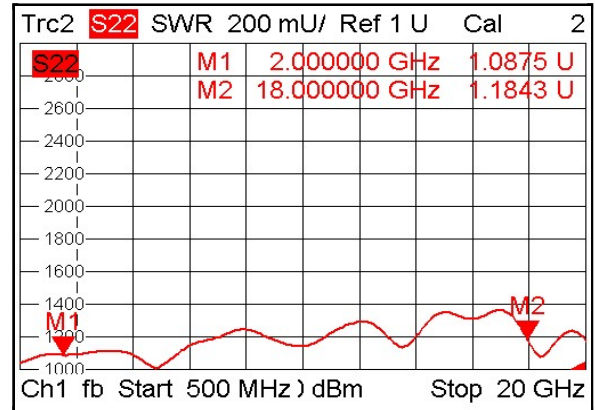


Coupling-Port VSWR

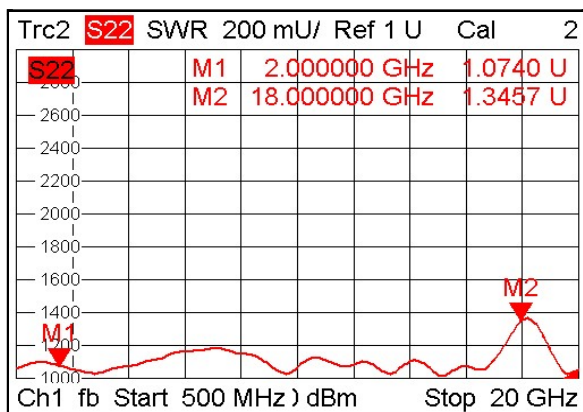


Insertion Loss

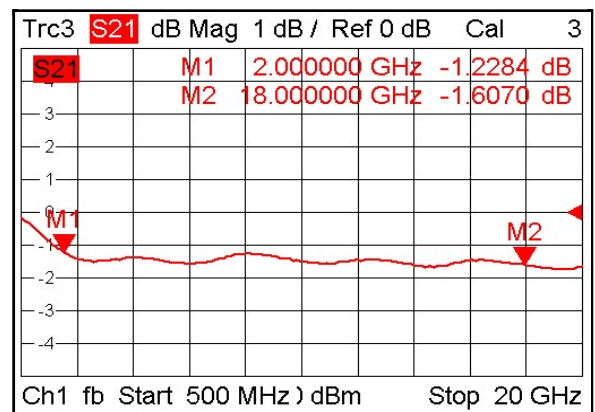

Coupling

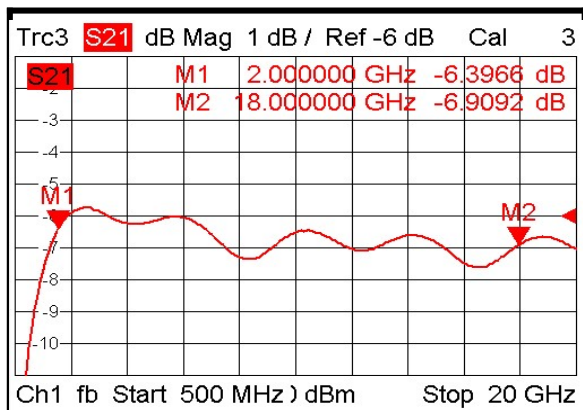

Directivity

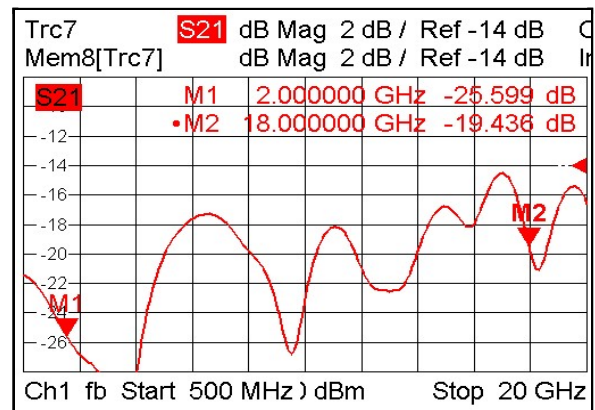

MICZEN TECHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


2-18GHz 6dB Directional Coupler

P/N: MZD060218GH



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

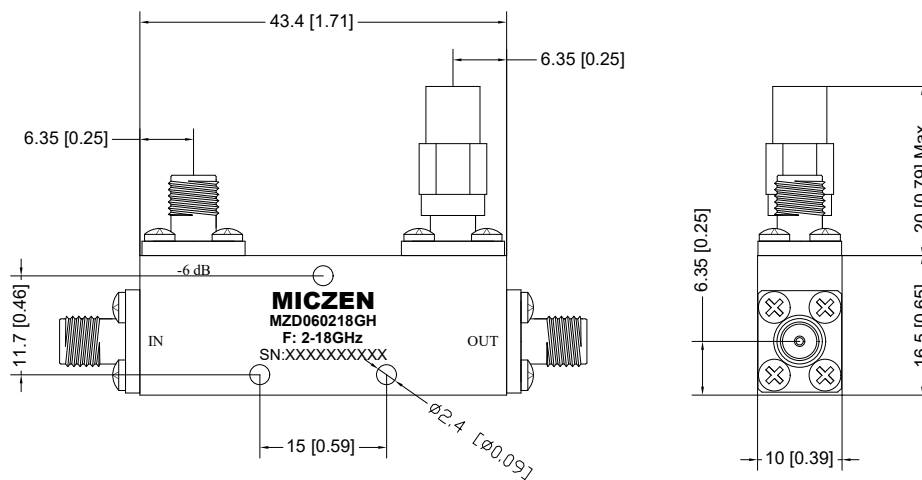

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com