

1-1.1GHz Low Noise Amplifier

P/N: LNA010011GA20



Description:

The amplifier is a low noise amplifier with a typical small signal gain of 25 dB and a typical noise figure of 0.6dB across the frequency range of 1to 1.1GHz. The typical output power P-1 13dBm. The DC power requirement for the amplifier is +15VDC/100 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		1-1.1		GHz
Gain	20	25		dB
Gain Flatness		±0.5	±0.8	dB
Input VSWR			1.8	-
Output VSWR			1.8	-
Output Power for (P1dB)	13	15		dBm
Noise Figure		0.5	0.6	dB
Input Max Power(no damage)			5	dBm
DC Current (Vcc=+15V)		100		mA
Impedance		50		Ω
DC Supply Connector		SMA-K		
Input/Output Connector		SMA-K/SMA-K		
Material		Aluminium/Gold Painting		
Weight		16g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


1-1.1GHz Low Noise Amplifier

P/N: LNA010011GA20



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

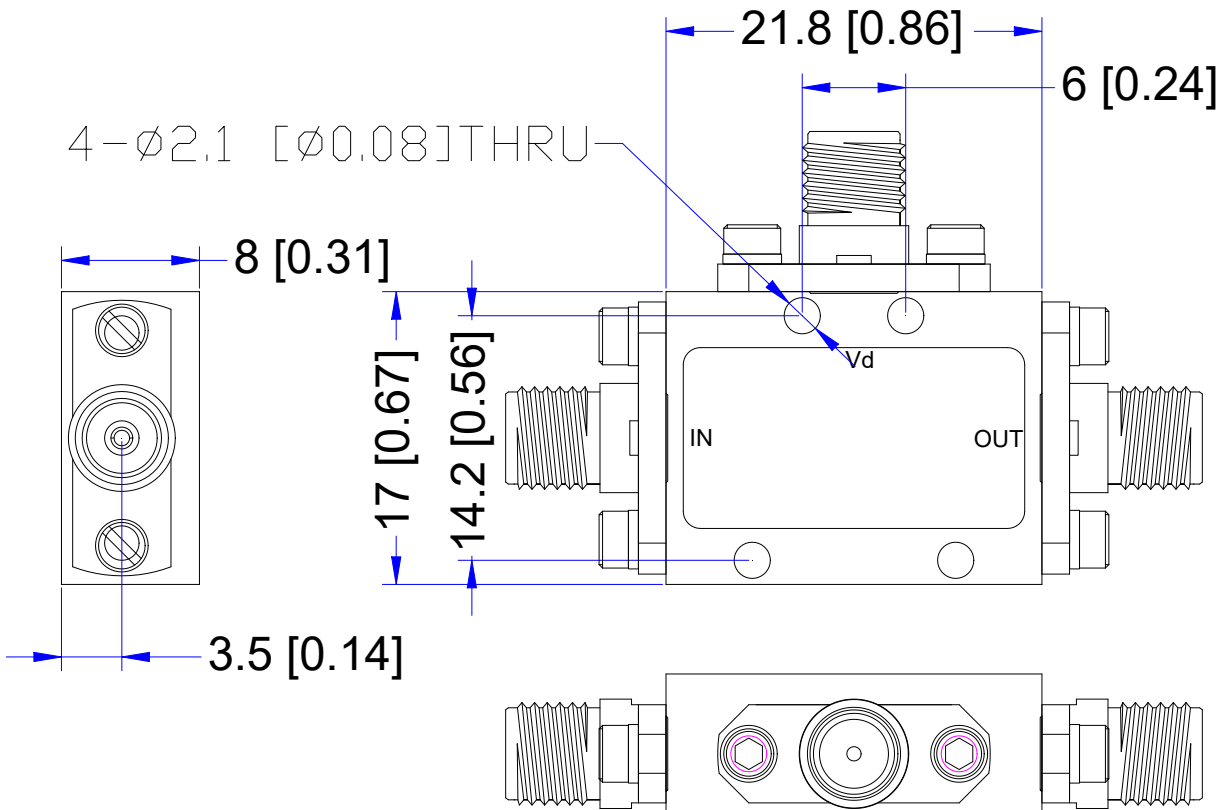

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com