

0.01-43.5GHz Low Noise Amplifier

P/N: MZLNA000435GA25



Description:

The amplifier is a low noise amplifier with a typical small signal gain of 27 dB and a typical noise figure of 5.0 dB across the frequency range of 0.01 to 43.5GHz. The typical output power P-1 20dBm. The DC power requirement for the amplifier is +12 VDC/350 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.01-43.5		GHz
Gain	25	27		dB
Gain Flatness		±1.5	±2	dB
Input VSWR		2.0	2.5	-
Output VSWR		2.0	2.5	-
Output Power for (P1dB)	16	20		dBm
Output Power Psat	18	21		dBm
Spurious		-60		dBc
OIP3		30		dBm
Noise Figure		5.0		dB
Input Max Power(no damage)			-5	dBm
DC Current(@Pout=12V)		350		mA
Impedance		50		Ω
Input/Output Connector	2.92mm-Female/2.92mm-Female			
Material	Aluminium/Gold Painting			
Weight	50g			
Package Sealing	General Sealing (Standard)			

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


0.01-43.5GHz Low Noise Amplifier

P/N: MZLNA000435GA25



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

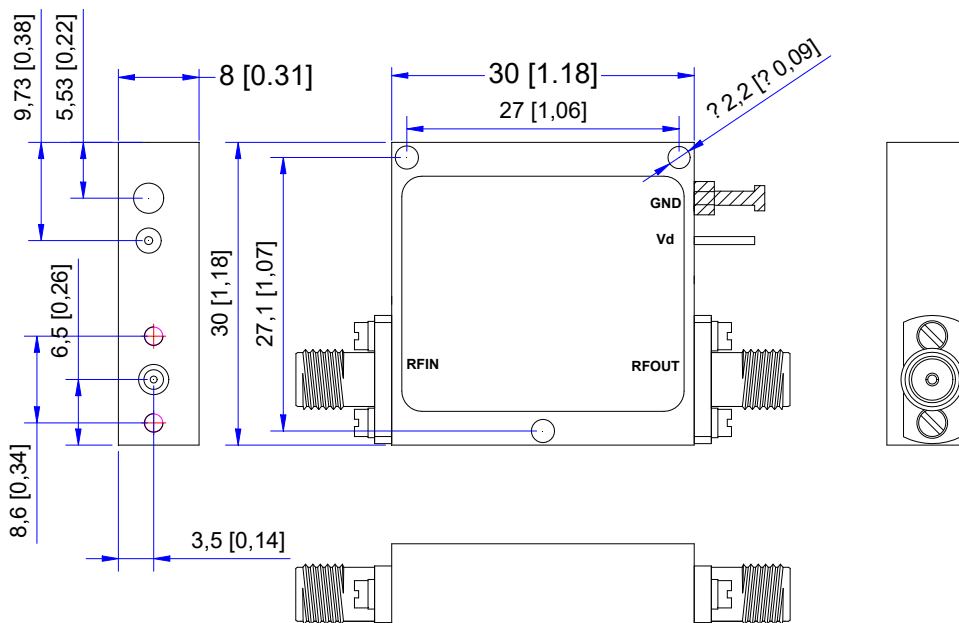

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

0.01-43.5GHz Low Noise Amplifier

P/N: MZLNA000435GA25



Performance Plot

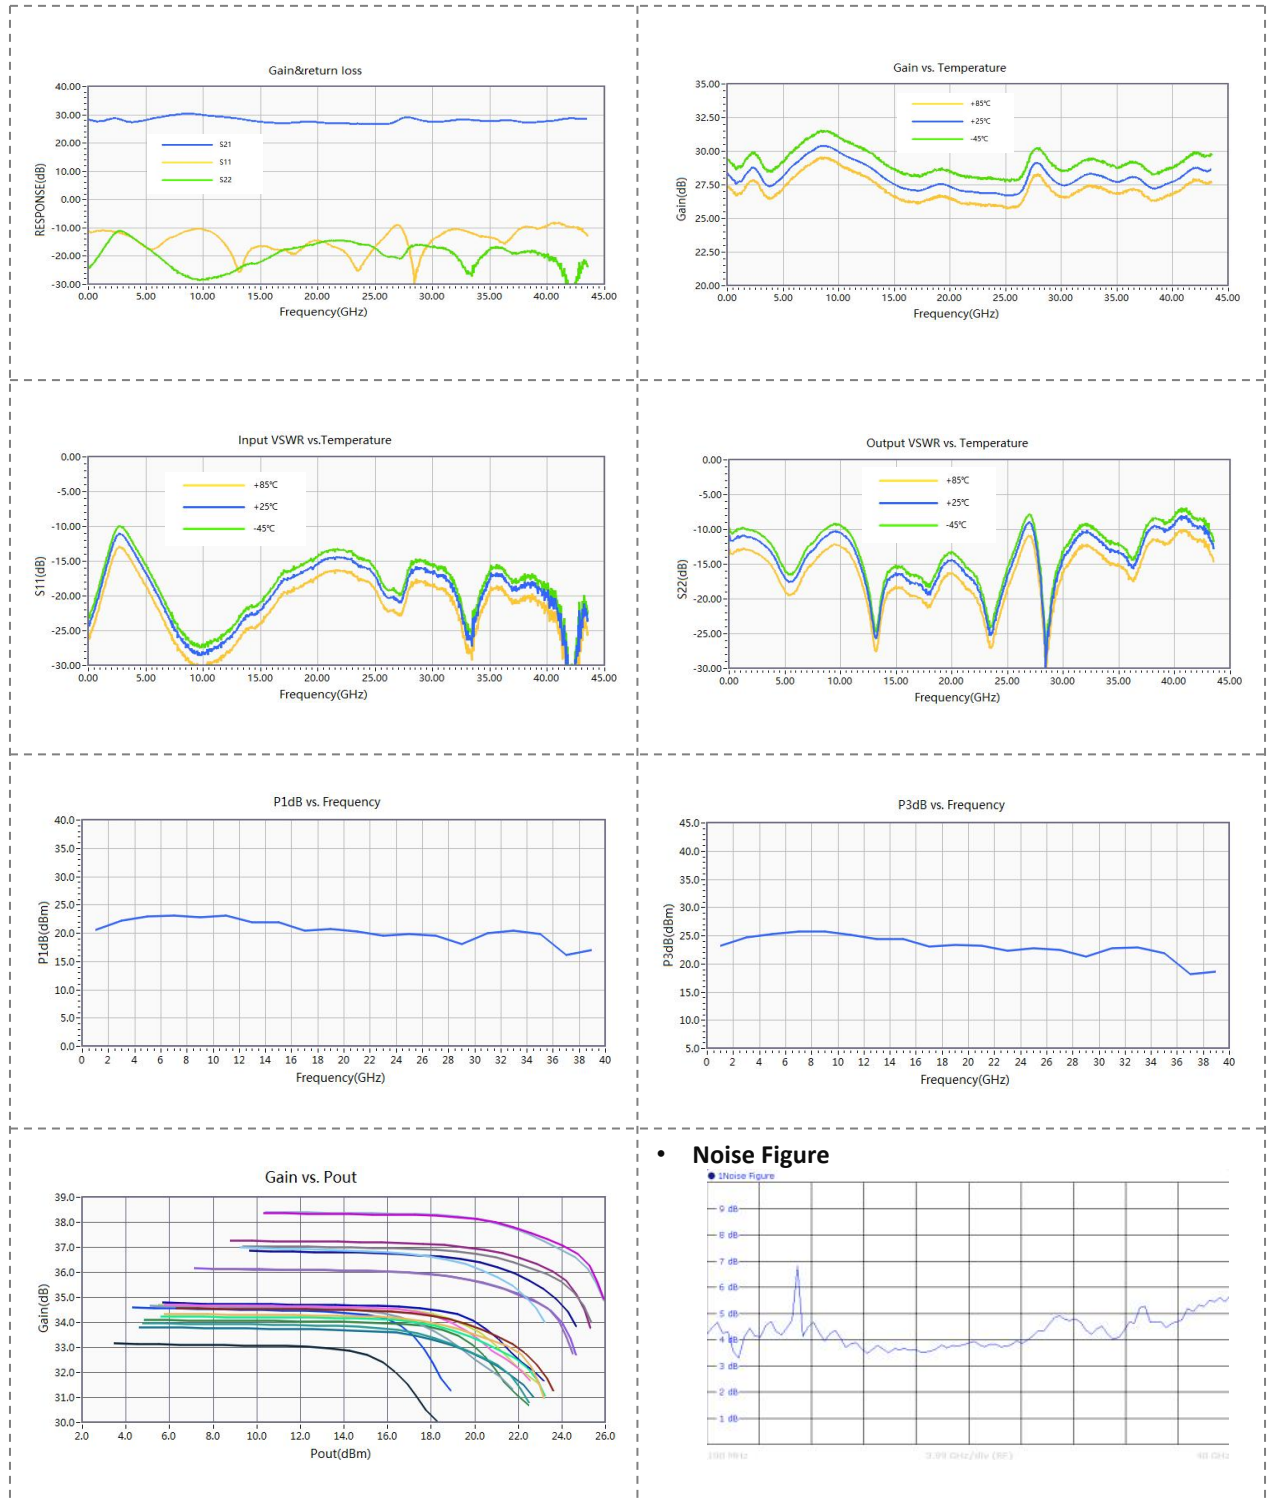

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com