



1.67-1.78GHz Low Noise Amplifier

P/N: MZLNA01670178GA19

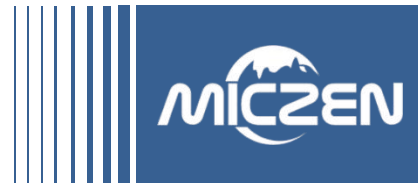

Description:

The amplifier is a low noise amplifier with a typical small signal gain of 20.5 dB and a typical noise figure of 1.0 dB across the frequency range of 1.67 to 1.78 GHz. The typical output power P-1 17dBm. The DC power requirement for the amplifier is +12 VDC/35 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

| Parameter | Min. | Typ. | Max. | Units |
|---|------|----------------------------|-------|-------|
| Frequency Range | | 1.67-1.78 | | GHz |
| Gain | 19 | | 20.5 | dB |
| Gain Flatness | | ±0.5 | ±0.75 | dB |
| Input VSWR | | 1.4 | 1.8 | - |
| Output VSWR | | 1.25 | 1.3 | - |
| Output Power for (P1dB) | 17 | | | dBm |
| Saturated Output Power (P _{sat}) | | 18 | | dBm |
| Spurious | | -70 | | dBc |
| Noise Figure | | 0.7 | 1.0 | dB |
| OIP3 | 25 | 30 | | dBm |
| Input Max Power(no damage) | | | 12 | dBm |
| DC Current (V _{cc} =+12V) | | 25 | 35 | mA |
| Impedance | | 50 | | Ω |
| Input/Output Connector | | SMA-Female/SMA-Female | | |
| Material | | Aluminium/Gold Painting | | |
| Weight | | 50g | | |
| Package Sealing | | General Sealing (Standard) | | |

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


1.67-1.78GHz Low Noise Amplifier

P/N: MZLNA01670178GA19



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

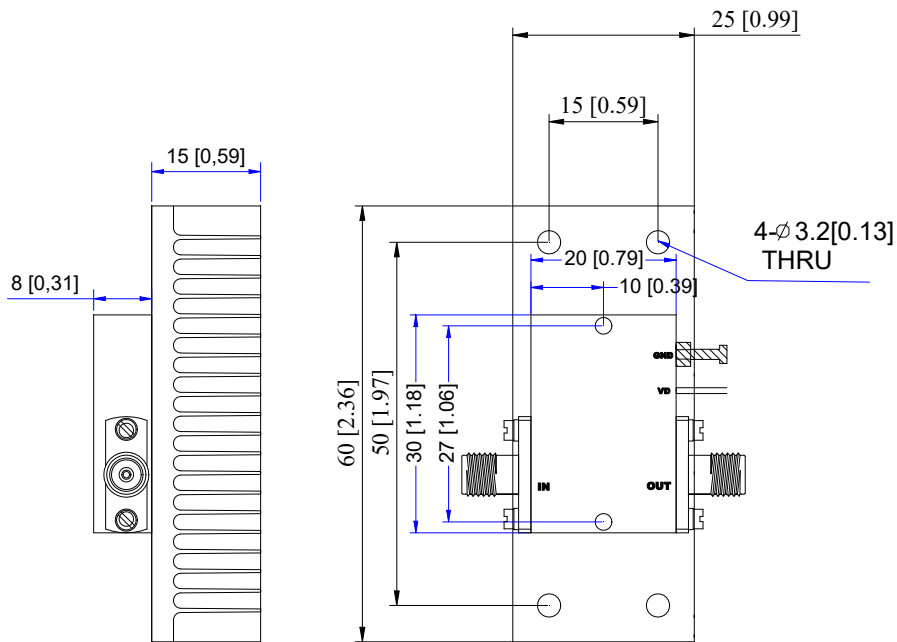

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com