

# 2-6GHz Low Noise Amplifier

P/N: MZLNA0206GA28



## Description:

The amplifier is a low noise amplifier with a typical small signal gain of 30 dB and a typical noise figure of 2.5 dB across the frequency range of 2 to 6 GHz. The typical output power P-1 17dBm. The DC power requirement for the amplifier is +12 VDC/150 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

## Electrical Specifications ( +25°C ) :

| Parameter                  | Min. | Typ.                       | Max. | Units |
|----------------------------|------|----------------------------|------|-------|
| Frequency Range            |      | 2-6                        |      | GHz   |
| Gain                       | 28   | 30                         |      | dB    |
| Gain Flatness              |      | ±1.0                       | ±1.5 | dB    |
| Input VSWR                 |      | 1.8                        | 2.0  | -     |
| Output VSWR                |      | 1.5                        | 2.0  | -     |
| Output Power for (P1dB)    | 16   | 17                         |      | dBm   |
| Spurious                   |      | -60                        |      | dBc   |
| Noise Figure               |      | 2.5                        | 5    | dB    |
| Output IP3                 | 24   | 26                         |      | dBm   |
| Input Max Power(no damage) |      |                            | 10   | dBm   |
| DC Current (Vcc=+12V)      |      | 120                        | 150  | mA    |
| Impedance                  |      | 50                         |      | Ω     |
| Input/Output Connector     |      | SMA-Female/SMA-Female      |      |       |
| Material                   |      | Aluminium                  |      |       |
| Weight                     |      | 80g                        |      |       |
| Package Sealing            |      | General Sealing (Standard) |      |       |

## Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE  
PRECAUTIONS ELECTROSTATIC  
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


# 2-6GHz Low Noise Amplifier

P/N: MZLNA0206GA28



## ■ Outline Drawing

All Dimensions in mm (inches) Tolerance  $\pm 0.25$  (0.01)

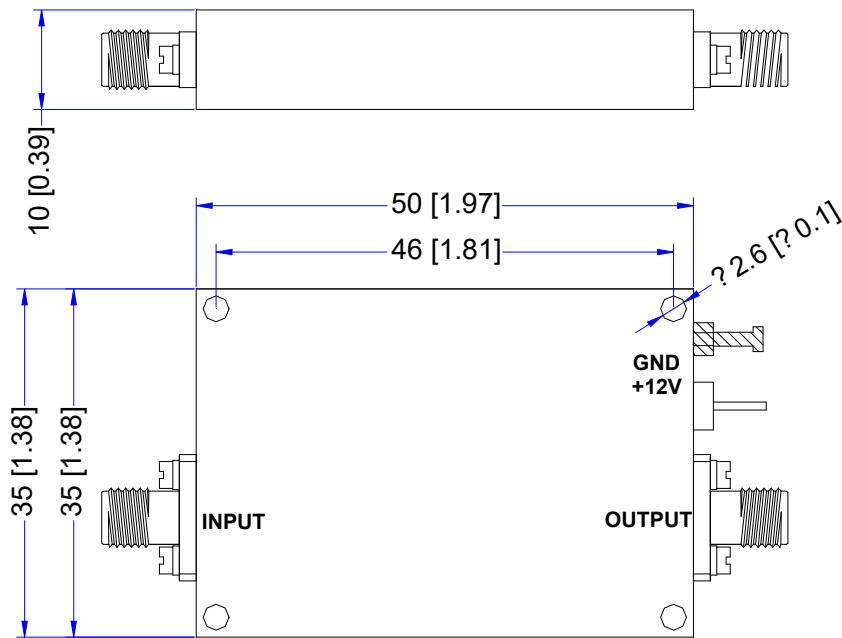

**\*\*\*Heat Sink required during operation\*\*\***

### NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

**MICZEN THCNOLOGIES CO.,LTD.**


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

# 2-6GHz Low Noise Amplifier

P/N: MZLNA0206GA28



## Performance Plot

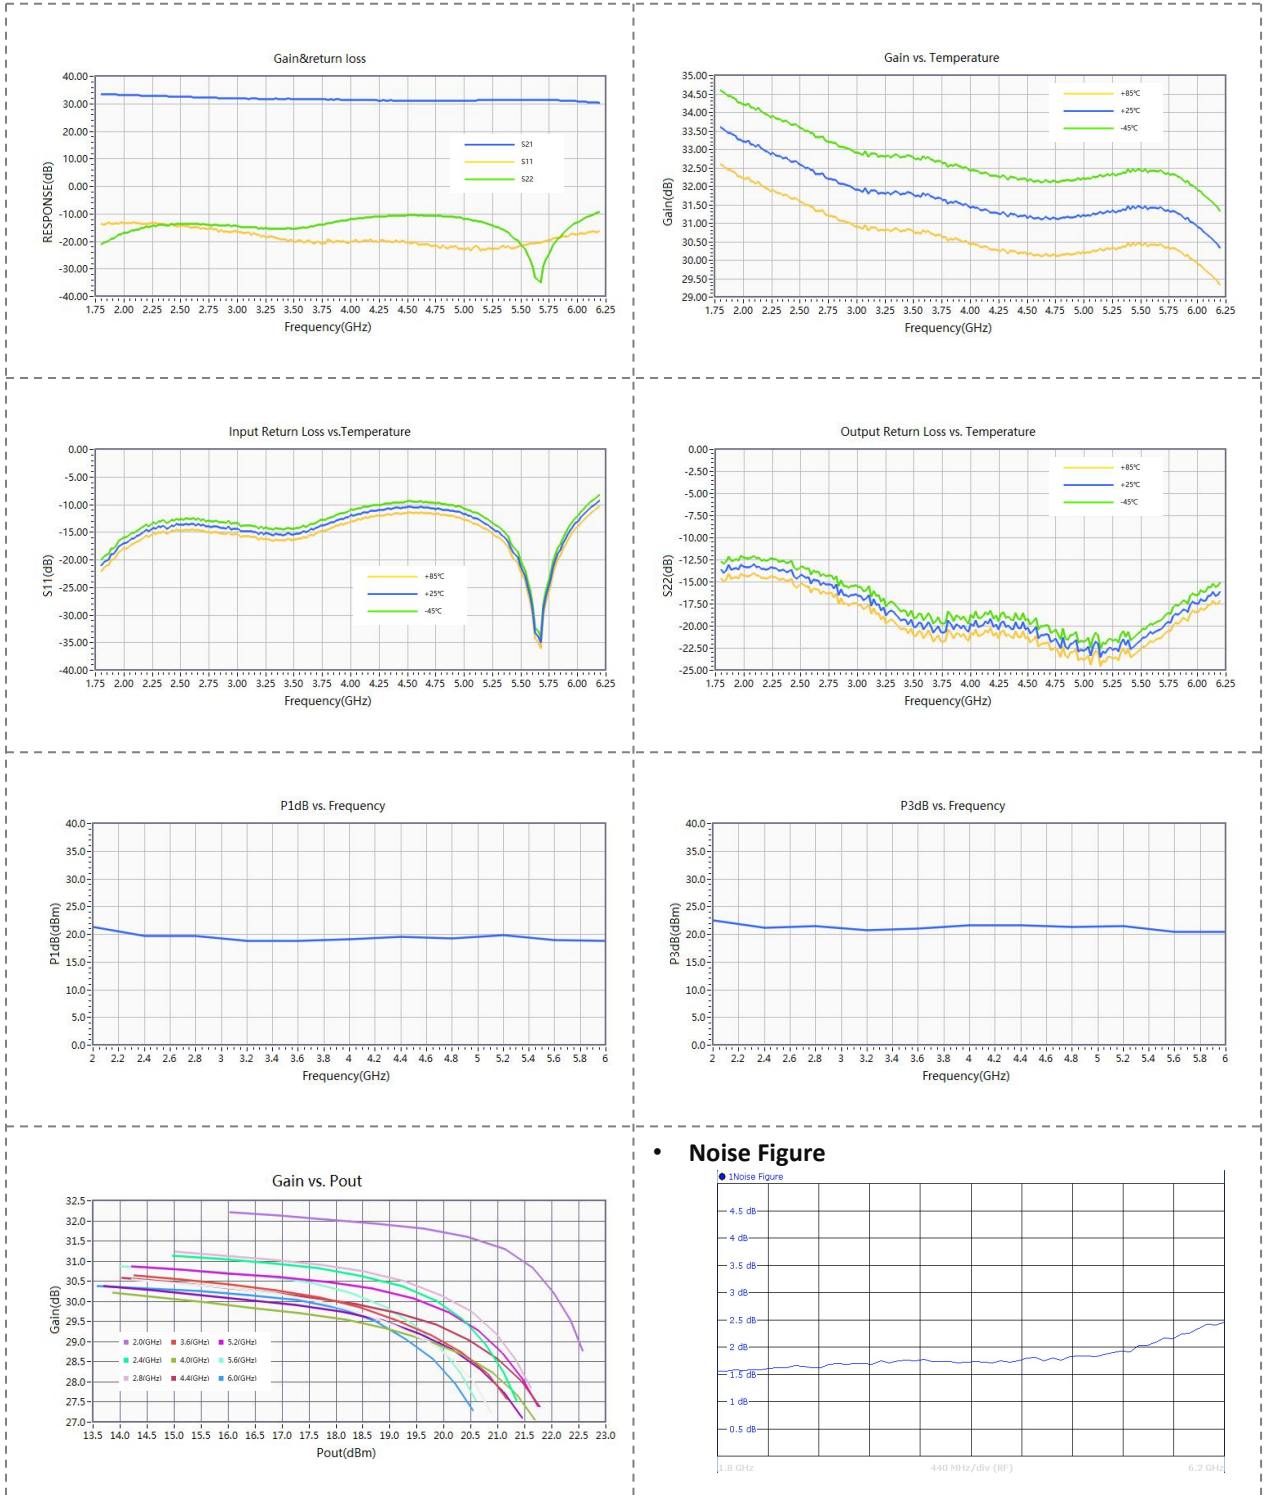

MICZEN THCNLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com