

16-40GHz Low Noise Amplifier

P/N: MZLNA1640GA35



Description:

The amplifier is a low noise amplifier with a typical small signal gain of 35 dB and a typical noise figure of 4.0 dB across the frequency range of 16 to 40 GHz. The typical output power P-1 22dBm. The DC power requirement for the amplifier is +6~16 VDC/480 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		16-40		GHz
Gain		35		dB
Gain Flatness		±2.0		dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Output Power for (P1dB)	21	22		dBm
Output Power Psat		22		dBm
Noise Figure		4.0	6	dB
Output IP3		30		dBm
Spurious		-60		dBc
Input Max Power(no damage)			-10	dBm
DC Current (Vcc=+6~16V)		480	550	mA
Impedance		50		Ω
Input/Output Connector	2.92mm-Female/2.92mm-Female			
Material	Aluminium/Gold Painting			
Weight	50g			
Package Sealing	General Sealing (Standard)			

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


16-40GHz Low Noise Amplifier

P/N: MZLNA1640GA35



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

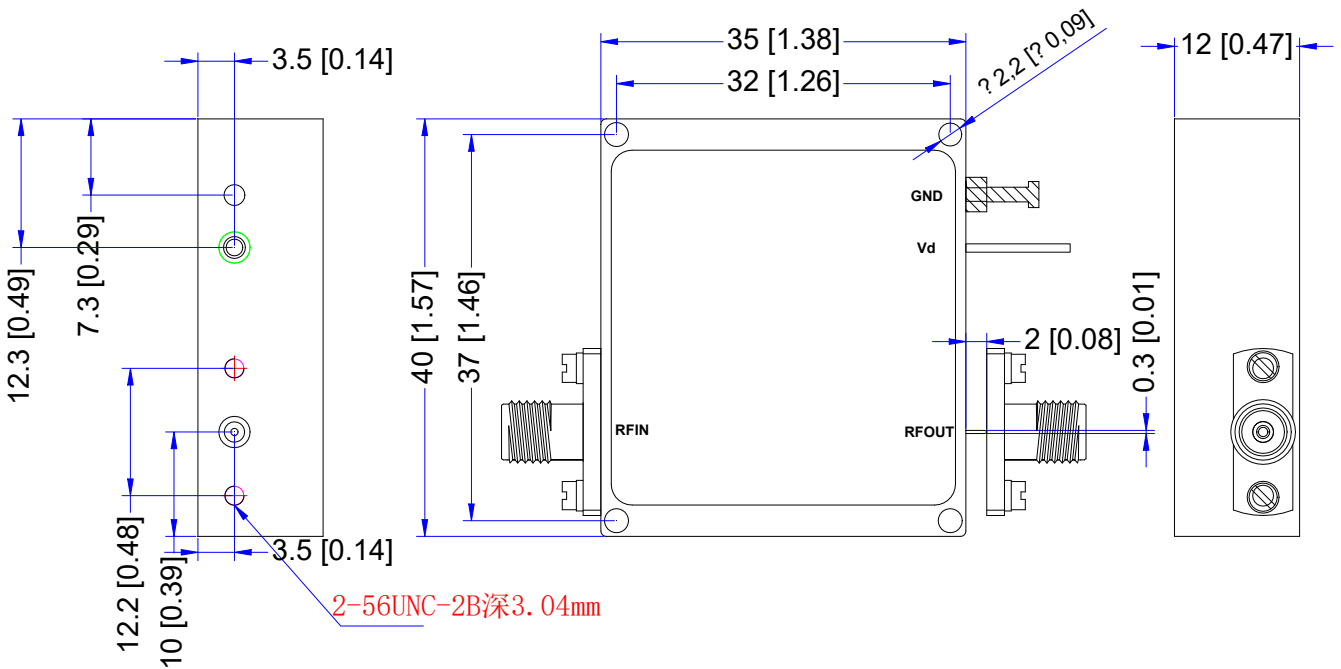

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

16-40GHz Low Noise Amplifier

P/N: MZLNA1640GA35



Performance Plot

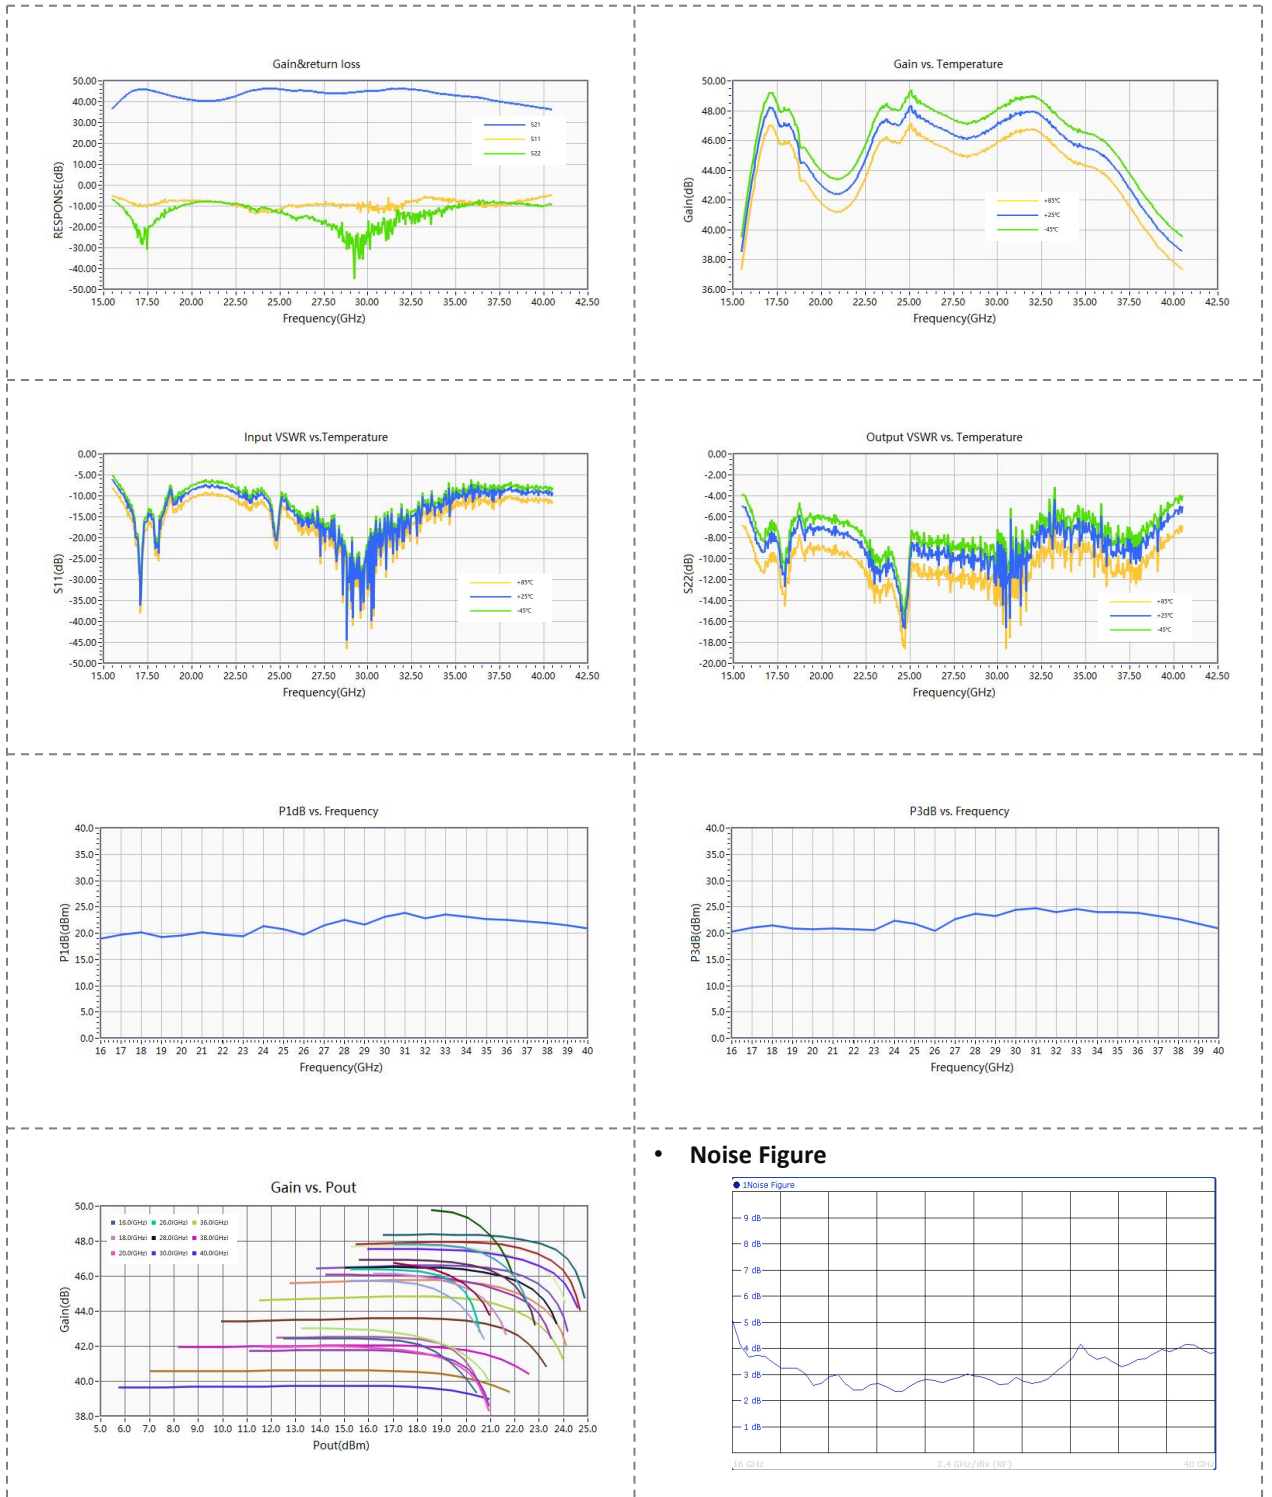

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com