



17-21.2GHz Low Noise Amplifier

P/N: MZLNA170212GB30

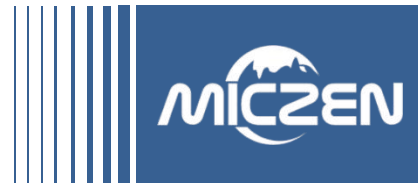

Description:

The amplifier is a low noise amplifier with a typical small signal gain of 35 dB and a typical noise figure of 1.9 dB across the frequency range of 17 to 21.2 GHz. The typical output power P-1 6dBm. The DC power requirement for the amplifier is +12 VDC/120 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

| Parameter | Min. | Typ. | Max. | Units |
|----------------------------|------|----------------------------|------|-------|
| Frequency Range | | 17-21.2 | | GHz |
| Gain | 30 | 35 | | dB |
| Gain Flatness | | ±1.5 | ±1.5 | dB |
| Input VSWR | | 1.6 | 2.0 | - |
| Output VSWR | | 1.5 | 2.0 | - |
| Output Power for (P1dB) | 6 | | | dBm |
| Spurious | | -60 | | dBc |
| Noise Figure | | 1.9 | 2.5 | dB |
| Input Max Power(no damage) | | | -15 | dBm |
| DC Current (Vcc=+12V) | | 100 | 120 | mA |
| Impedance | | 50 | | Ω |
| Input/Output Connector | | SMA-Female/SMA-Female | | |
| Material | | Aluminium/Gold Painting | | |
| Weight | | 50g | | |
| Package Sealing | | General Sealing (Standard) | | |

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

17-21.2GHz Low Noise Amplifier

P/N: MZLNA170212GB30



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com