

18-40GHz Low Noise Amplifier

P/N: MZLNA1840GAC40



Description:

The amplifier is a low noise amplifier with a typical small signal gain of 43 dB and a typical noise figure of 3.5 dB across the frequency range of 18 to 40 GHz. The typical output power P-1 12dBm. The DC power requirement for the amplifier is +8 VDC/350 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

| Parameter | Min. | Typ. | Max. | Units |
|----------------------------|------|-----------------------------|------|-------|
| Frequency Range | | 18-40 | | GHz |
| Gain | 40 | 43 | | dB |
| Gain Flatness | | ±2.0 | | dB |
| Input VSWR | | 2.0 | 2.2 | - |
| Output VSWR | | 2.0 | 2.2 | - |
| Output Power for (P1dB) | 12 | | | dBm |
| Output Power Psat | 13 | | | dBm |
| Noise Figure | | 3.5 | 4.0 | dB |
| Spurious | | -60 | | dBc |
| Output IP3 | | 20 | | dBm |
| Input Max Power(no damage) | | | -10 | dBm |
| AC | | 110~220/50Hz | | |
| Impedance | | 50 | | Ω |
| Input/Output Connector | | 2.92mm-Female/2.92mm-Female | | |
| Material | | Aluminium | | |
| Weight | | 800g | | |
| Package Sealing | | General Sealing (Standard) | | |

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


18-40GHz Low Noise Amplifier

P/N: MZLNA1840GAC40



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

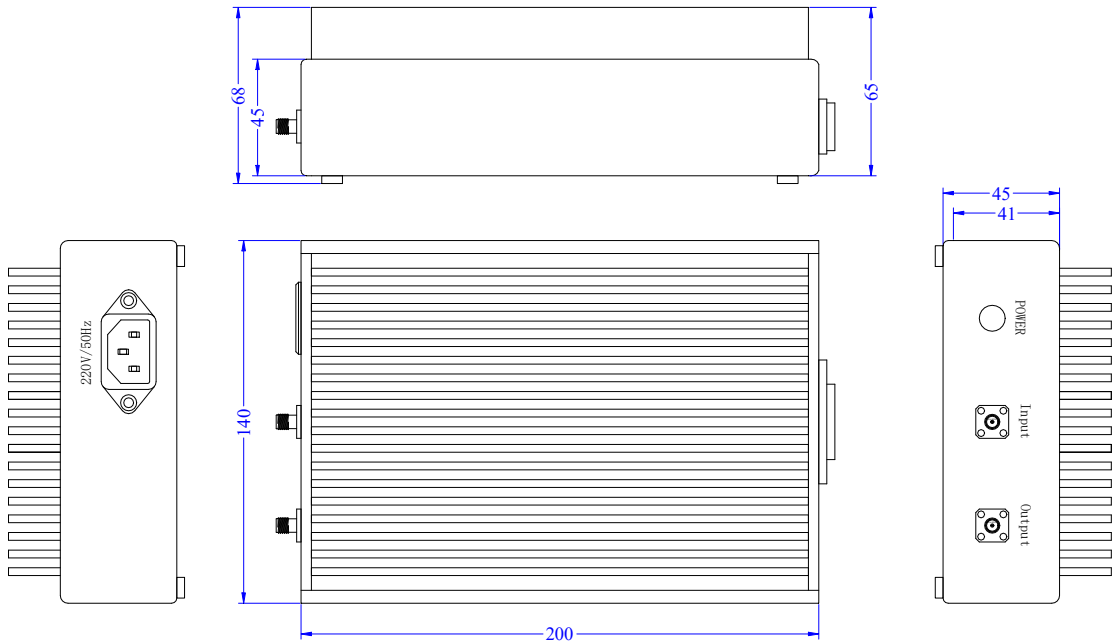

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com