

# 0.5-2GHz 8way Power Divider

P/N: MZP200502GA



## Description:

The power divider is a 2way power divider with a typical insertion loss of 0.4 dB and a typical isolation of 22dB across the frequency range of 0.5 to 2 GHz. The power divider can reach handling power 30W. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

## Electrical Specifications ( +25°C ) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.5-2		GHz
Insertion Loss		0.4	0.5	dB
Isolation	20	22		dB
Input VSWR			1.25	-
Output VSWR			1.2	-
Phase Unbalance			±0	°
Amplitude Unbalance			±0.2	dB
Forward Power Handle Capability			30	W
Reverse Power Handle Capability			2	W
Impedance		50		Ω
Connector		SMA-Female		
Material		Aluminum		
Weight		-g		
Package Sealing		Gray Color(Standard)		

## Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+105°C



OBSERVE  
PRECAUTIONS ELECTROSTATIC  
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


# 0.5-2GHz 8way Power Divider

P/N: MZP200502GA



## ■ Outline Drawing

All Dimensions in mm (inches) Tolerance  $\pm 0.25$  (0.01)

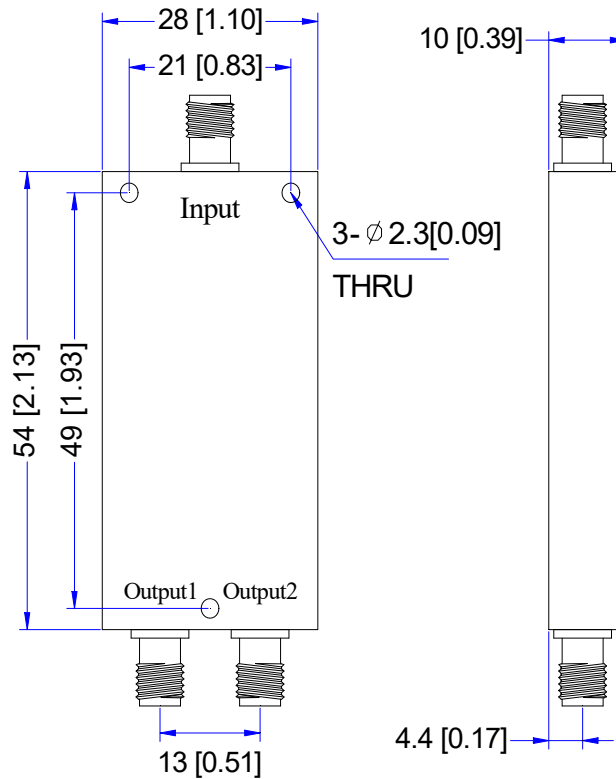

### NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


# 0.005-1GHz 8way Power Divider

P/N: MZP800051000GA




## Performance Plot


### Insertion loss&Amplitude Unbalance

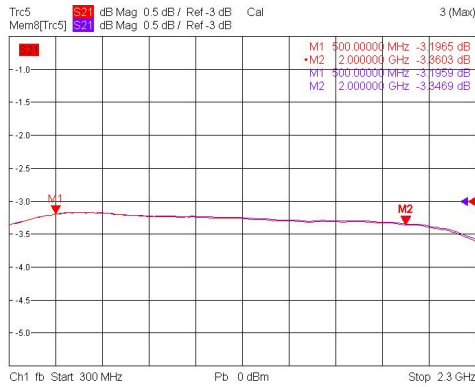


### Isolation

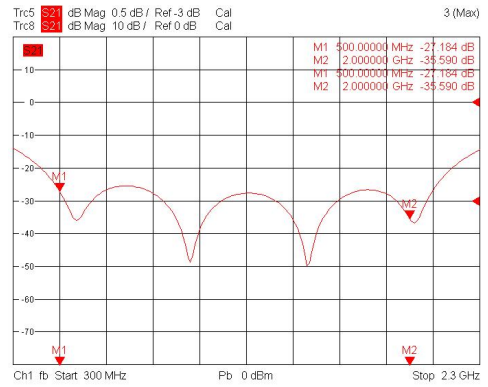


### Input VSWR

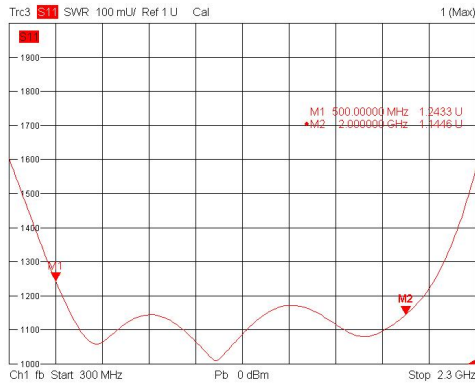

### Output VSWR

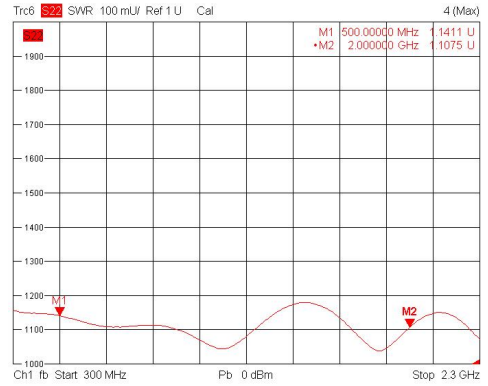

### Phase Unbalance

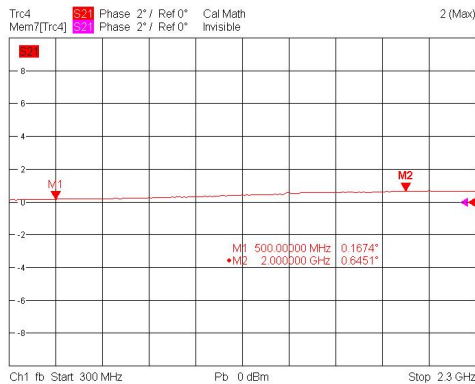

MICZEN THCNLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com