

# 6-40GHz 2way Power Divider

P/N: MZP20640GAH



## Description:

The power divider is a 2way power divider with a typical insertion loss of 0.8 dB and a typical isolation of 16dB across the frequency range of 6 to 40 GHz. The power divider can reach handling power 10W. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

## Electrical Specifications ( +25°C ) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		6-40		GHz
Insertion Loss		0.8	1.1	dB
Isolation	15	16		dB
Input VSWR		1.4	2.0	-
Output VSWR		1.4	2.0	-
Phase Unbalance		±14	±15	°
Amplitude Unbalance		±0.4	±0.5	dB
Handling Power			10	W
Impedance		50		Ω
Connector		2.92-Female		
Material		Aluminum		
Weight		20g		
Package Sealing		Gray Color(Standard)		

## Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+105°C



OBSERVE  
PRECAUTIONS ELECTROSTATIC  
SENSITIVE DEVICES

**MICZEN THCHNOLOGIES CO.,LTD.**

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


# 6-40GHz 2way Power Divider

P/N: MZP20640GAH



## ■ Outline Drawing

All Dimensions in mm (inches) Tolerance  $\pm 0.25$  (0.01)

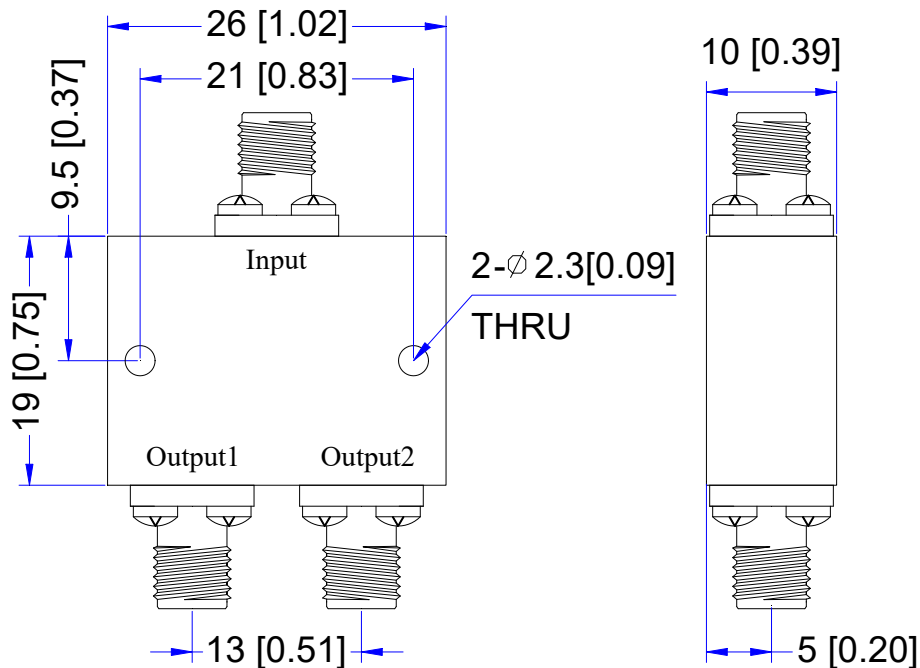

### NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com