

10-40GHz 2way Power Divider

P/N: MZP21040GA



Description:

The power divider is a 16way power divider with a typical insertion loss of 4.0 dB and a typical isolation of 17dB across the frequency range of 10 to 26.5 GHz. The power divider can reach handling power 20W. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		10-40		GHz
Insertion Loss			1.5	dB
Isolation	20			dB
Input VSWR			1.6	-
Output VSWR			1.6	-
Phase Unbalance			±5	°
Amplitude Unbalance			±0.3	dB
Power Handling		20		W
Impedance		50		Ω
Connector		2.92-Female		
Material		Aluminum		
Weight		-g		
Package Sealing		Blue Color(Standard)		

Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+105°C




OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


10-40GHz 2way Power Divider

P/N: MZP21040GA

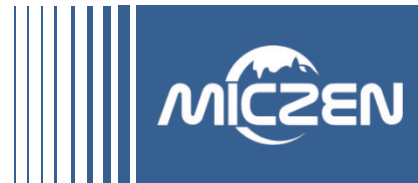

■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

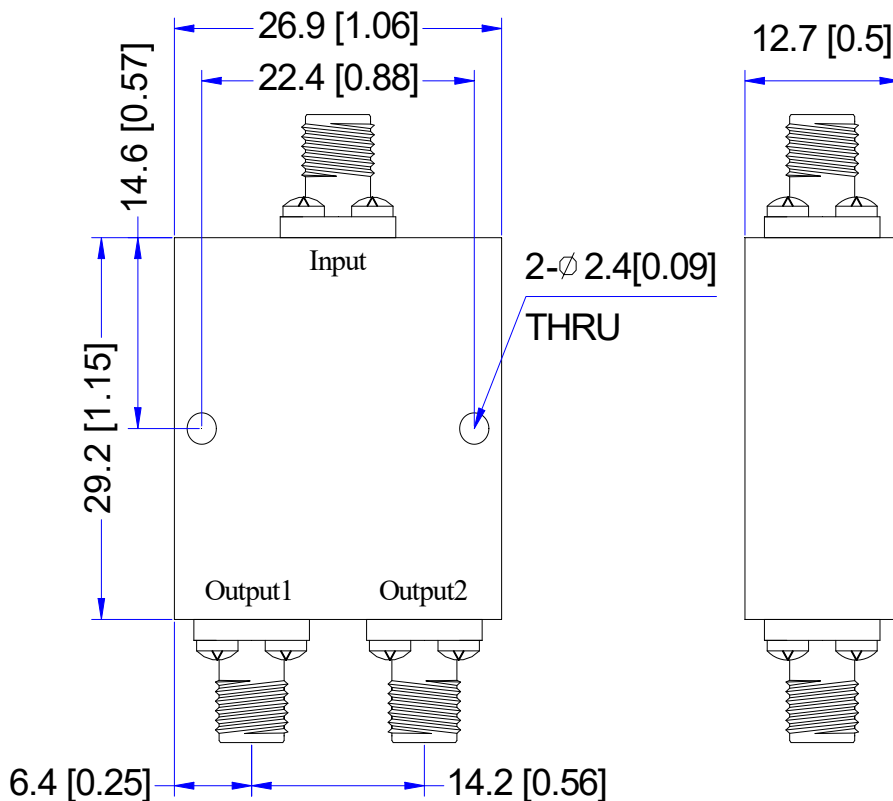

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


10-40GHz 2way Power Divider

P/N: MZP21040GA




Performance Plot


Insertion loss&Amplitude Unbalance

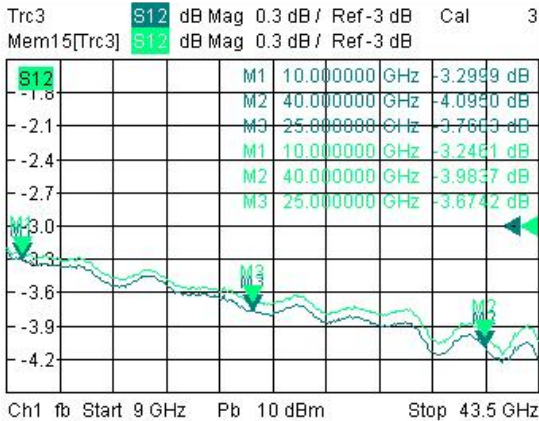


Isolation

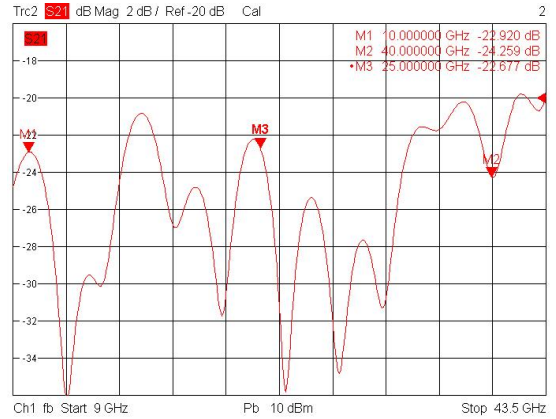

Input VSWR

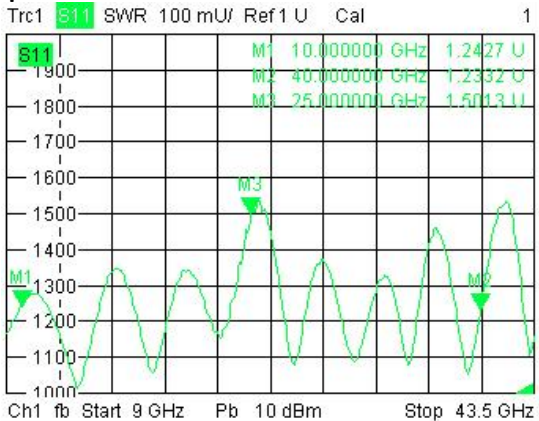

Output VSWR

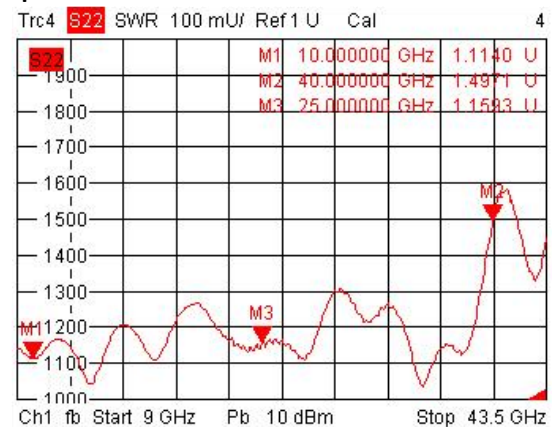

Phase Unbalance

