

14-16GHz 3way Power Divider

P/N: MZP31416GA



Description:

The power divider is a 3way power divider with a typical insertion loss of 0.6 dB and a typical isolation of 22dB across the frequency range of 14 to 16 GHz. The power divider can reach handling power 20W. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		14-16		GHz
Insertion Loss			0.6	dB
Isolation	18	22		dB
Input VSWR		1.4	1.5	-
Output VSWR		1.4	1.5	-
Phase Unbalance			±4	°
Amplitude Unbalance			±0.4	dB
Power Handling		20		W
Impedance		50		Ω
Connector		SMA-Female		
Material		Aluminum		
Weight		45g		
Package Sealing		Black Color(Standard)		

Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+105°C




OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


14-16GHz 3way Power Divider

P/N: MZP31416GA

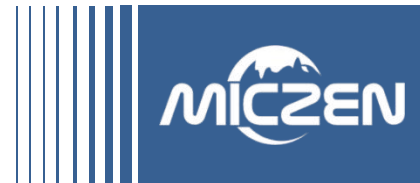

■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

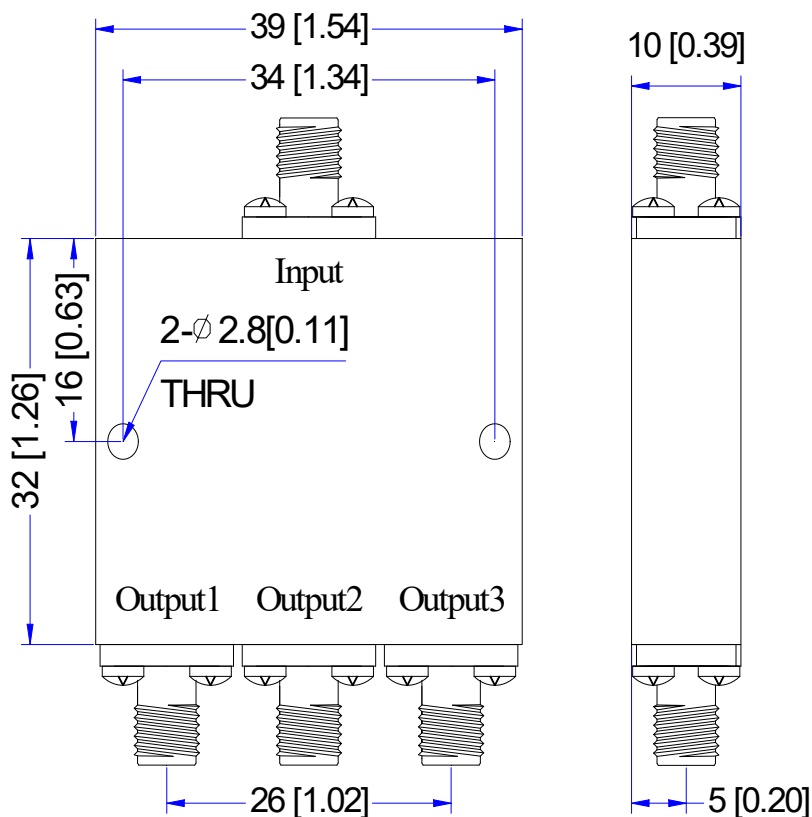

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

14-16GHz 3way Power Divider

P/N: MZP31416GA



Performance Plot

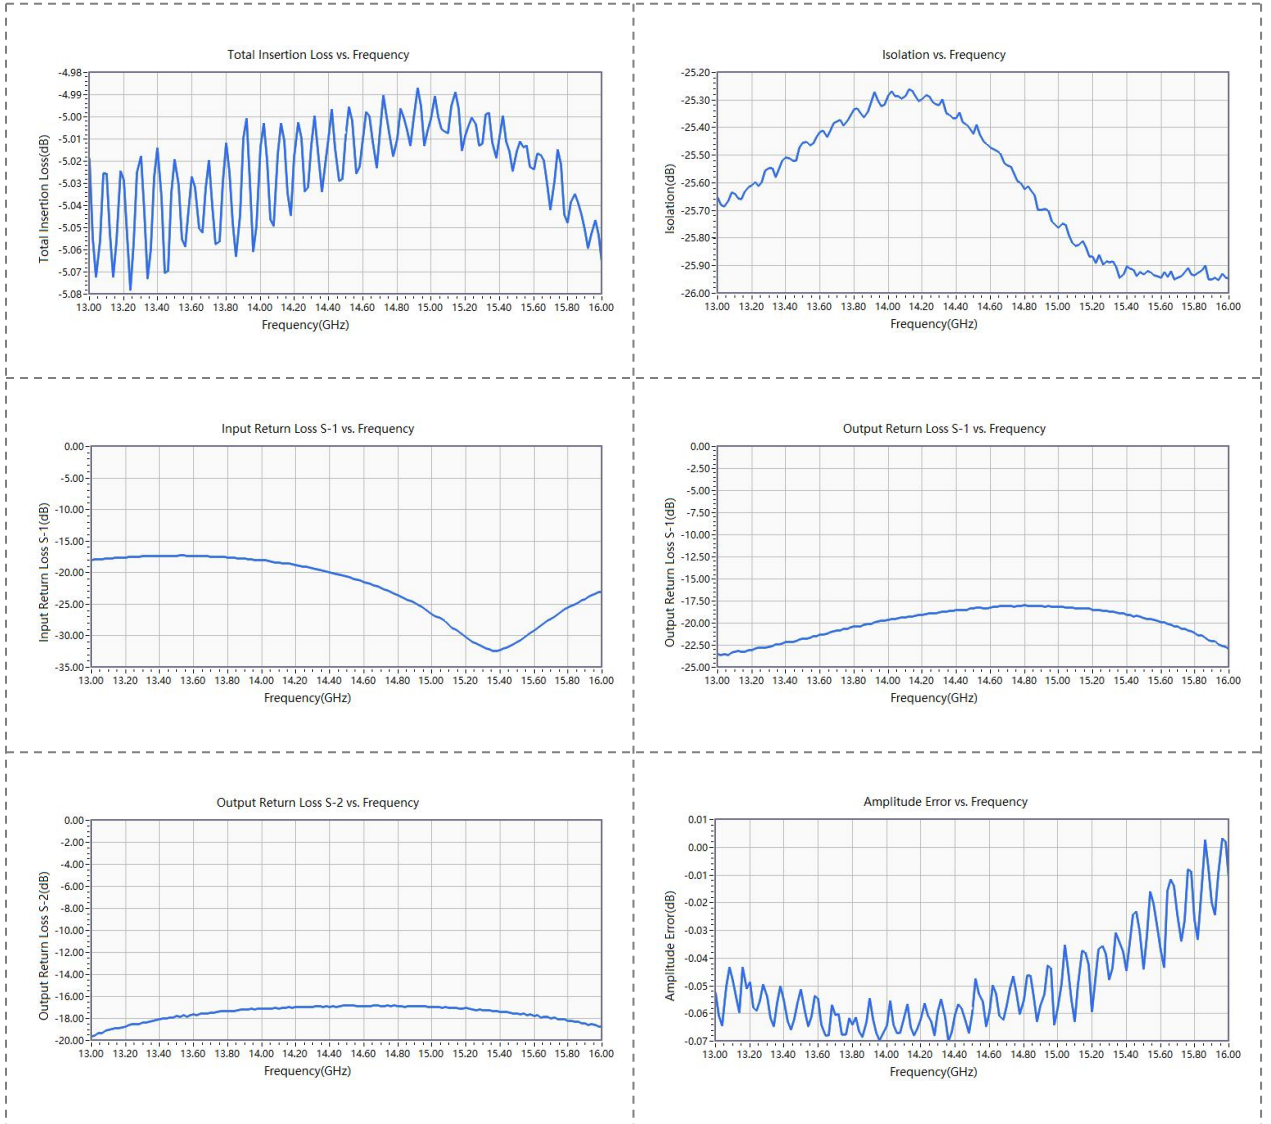

MICZEN THCNLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com