

6-18GHz 2W Power Amplifier

P/N: MZPA0618GA2W



Description:

The power amplifier is a 2W power amplifier with a typical small signal gain of 30 dB across the frequency range of 6 to 18 GHz. The typical output power P-1 33dBm. The DC power requirement for the amplifier is +12 VDC/2.4 A. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		6-18		GHz
Gain	30			dB
Gain Flatness			±2	dB
Input VSWR			2.2	-
Output VSWR			2.2	-
Output Power for (P1dB)	33			dBm
Output Power Psat	34			dBm
Noise Figure			7.5	dB
OIP3		42		dBm
Input Max Power(no damage)			12	dBm
DC Current (Vcc=+12V)(@Pout=2W)		2.4		A
Impedance		50		Ω
Input/Output Connector		2.92-Female/2.92-Female		
Material		Aluminium/Gold Plating		
Weight		50g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


6-18GHz 2W Power Amplifier

P/N: MZPA0618GA2W



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

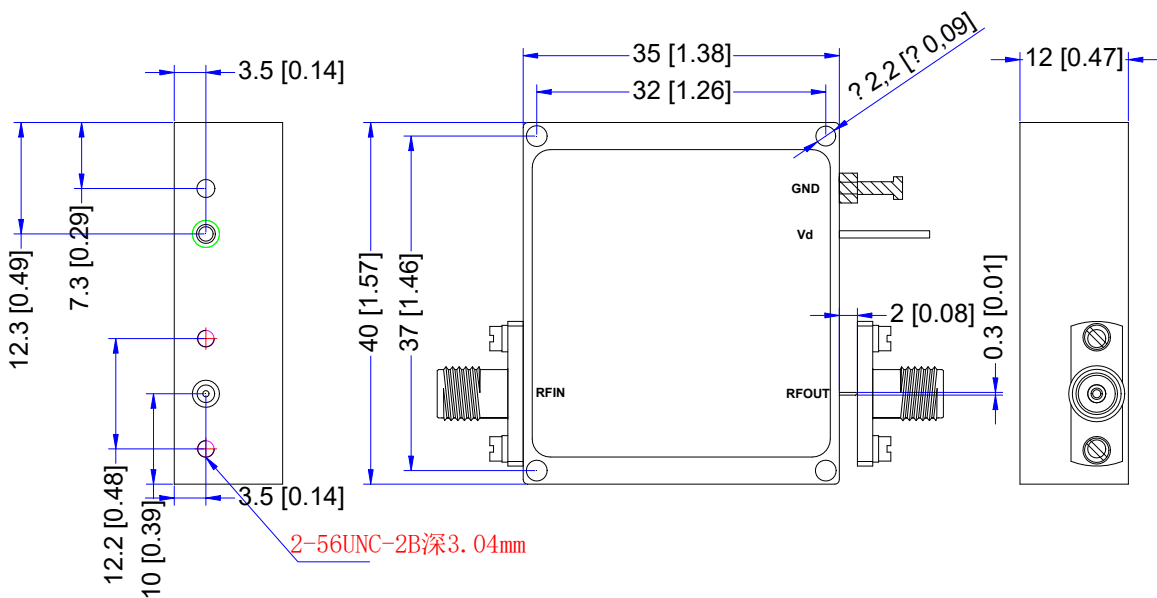

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

6-18GHz 2W Power Amplifier

P/N: MZPA0618GA2W



Performance Plot

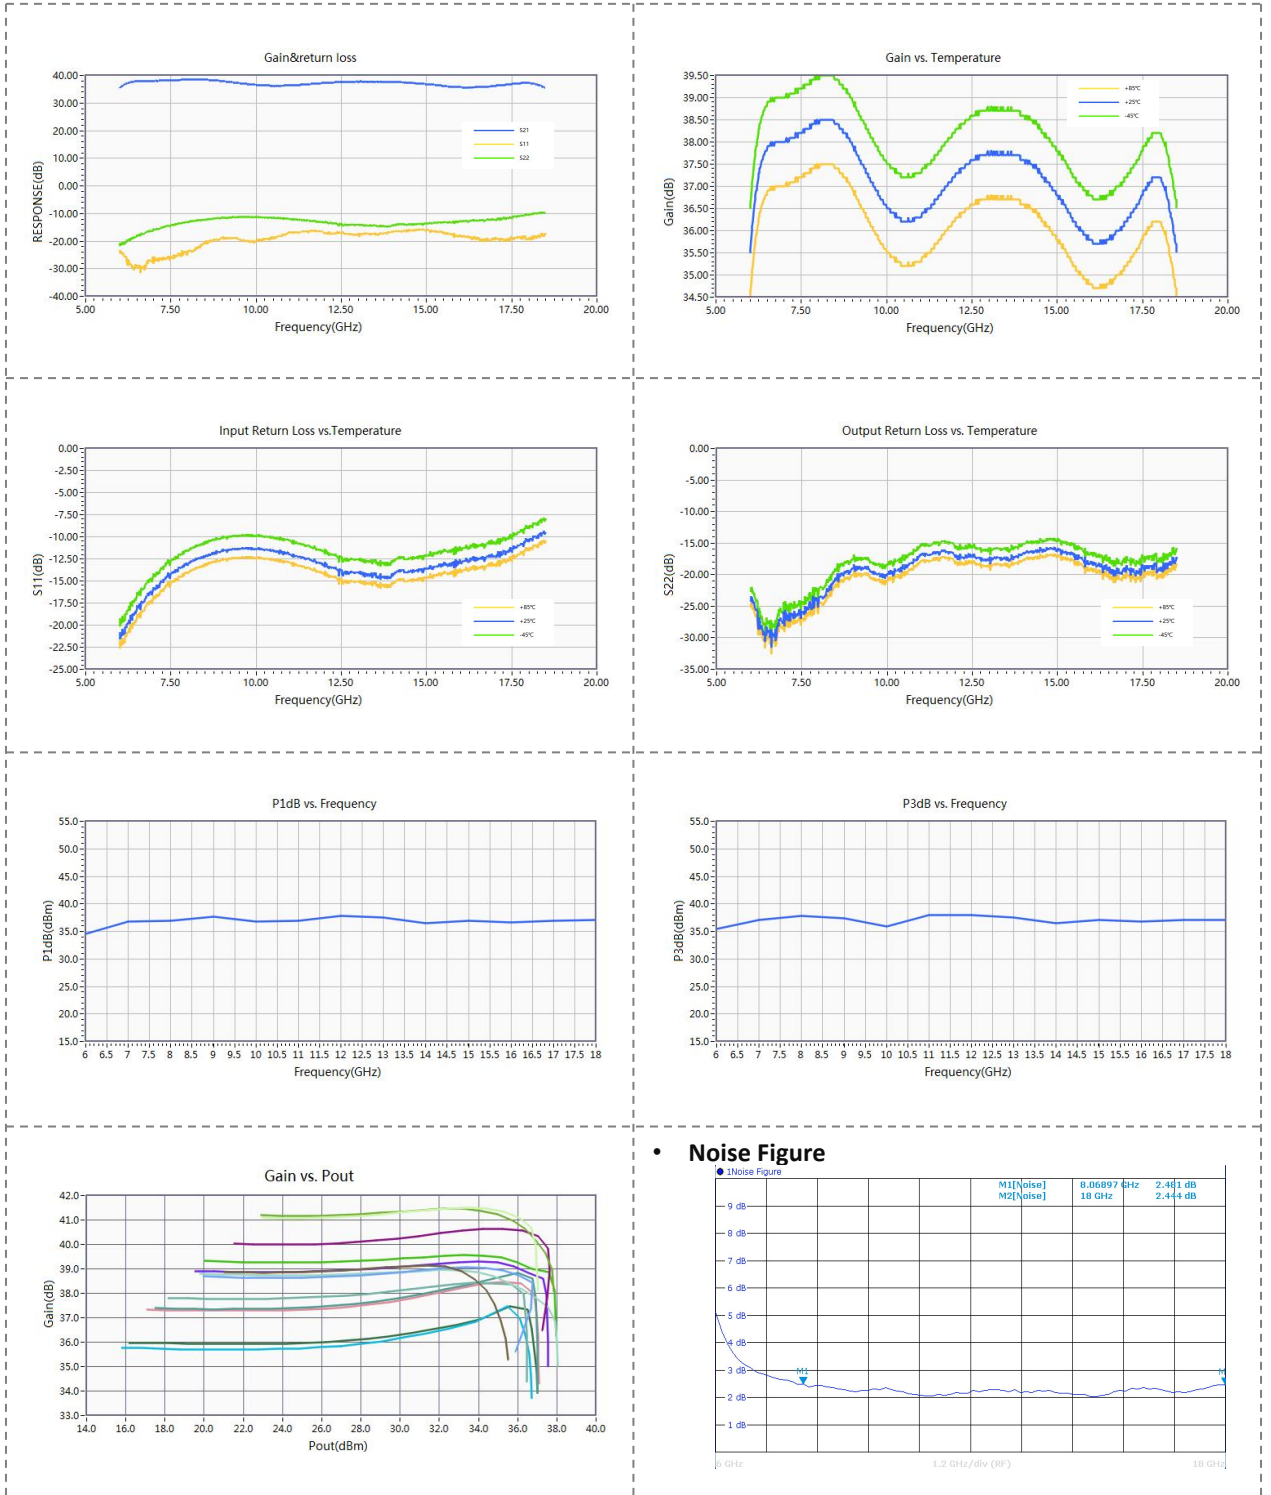

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com