

23-35GHz 0.5W Power Amplifier

P/N: MZPA2335GB0.5W



Description:

The power amplifier is a 0.5W power amplifier with a typical small signal gain of 40 dB across the frequency range of 23 to 35 GHz. The typical output power P-1 28dBm. The DC power requirement for the amplifier is +6~15 VDC/1.1 A. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		23-35		GHz
Gain		40		dB
Gain Flatness		±2.0		dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Output Power for (P1dB)		28		dBm
Output Power Psat		30		dBm
Noise Figure		7		dB
Input Max Power(no damage)			10	dBm
DC Current (Vcc=+6~15V)		1.1		A
Impedance		50		Ω
Input/Output Connector	2.92mm-Female/2.92mm-Female			
Material	Aluminium\Gold Painting			
Weight	62g			
Package Sealing	Air Sealing (Laser seal welding)			

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


23-35GHz 0.5W Power Amplifier

P/N: MZPA2335GB0.5W



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

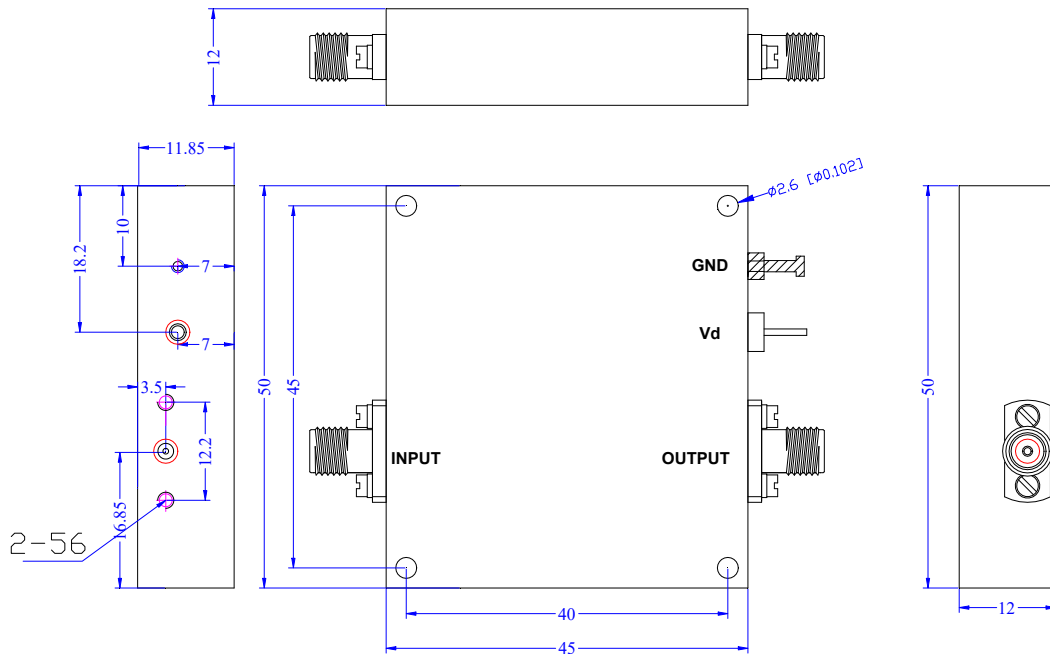

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

23-35GHz 0.5W Power Amplifier

P/N: MZPA2335GB0.5W



Performance Plot

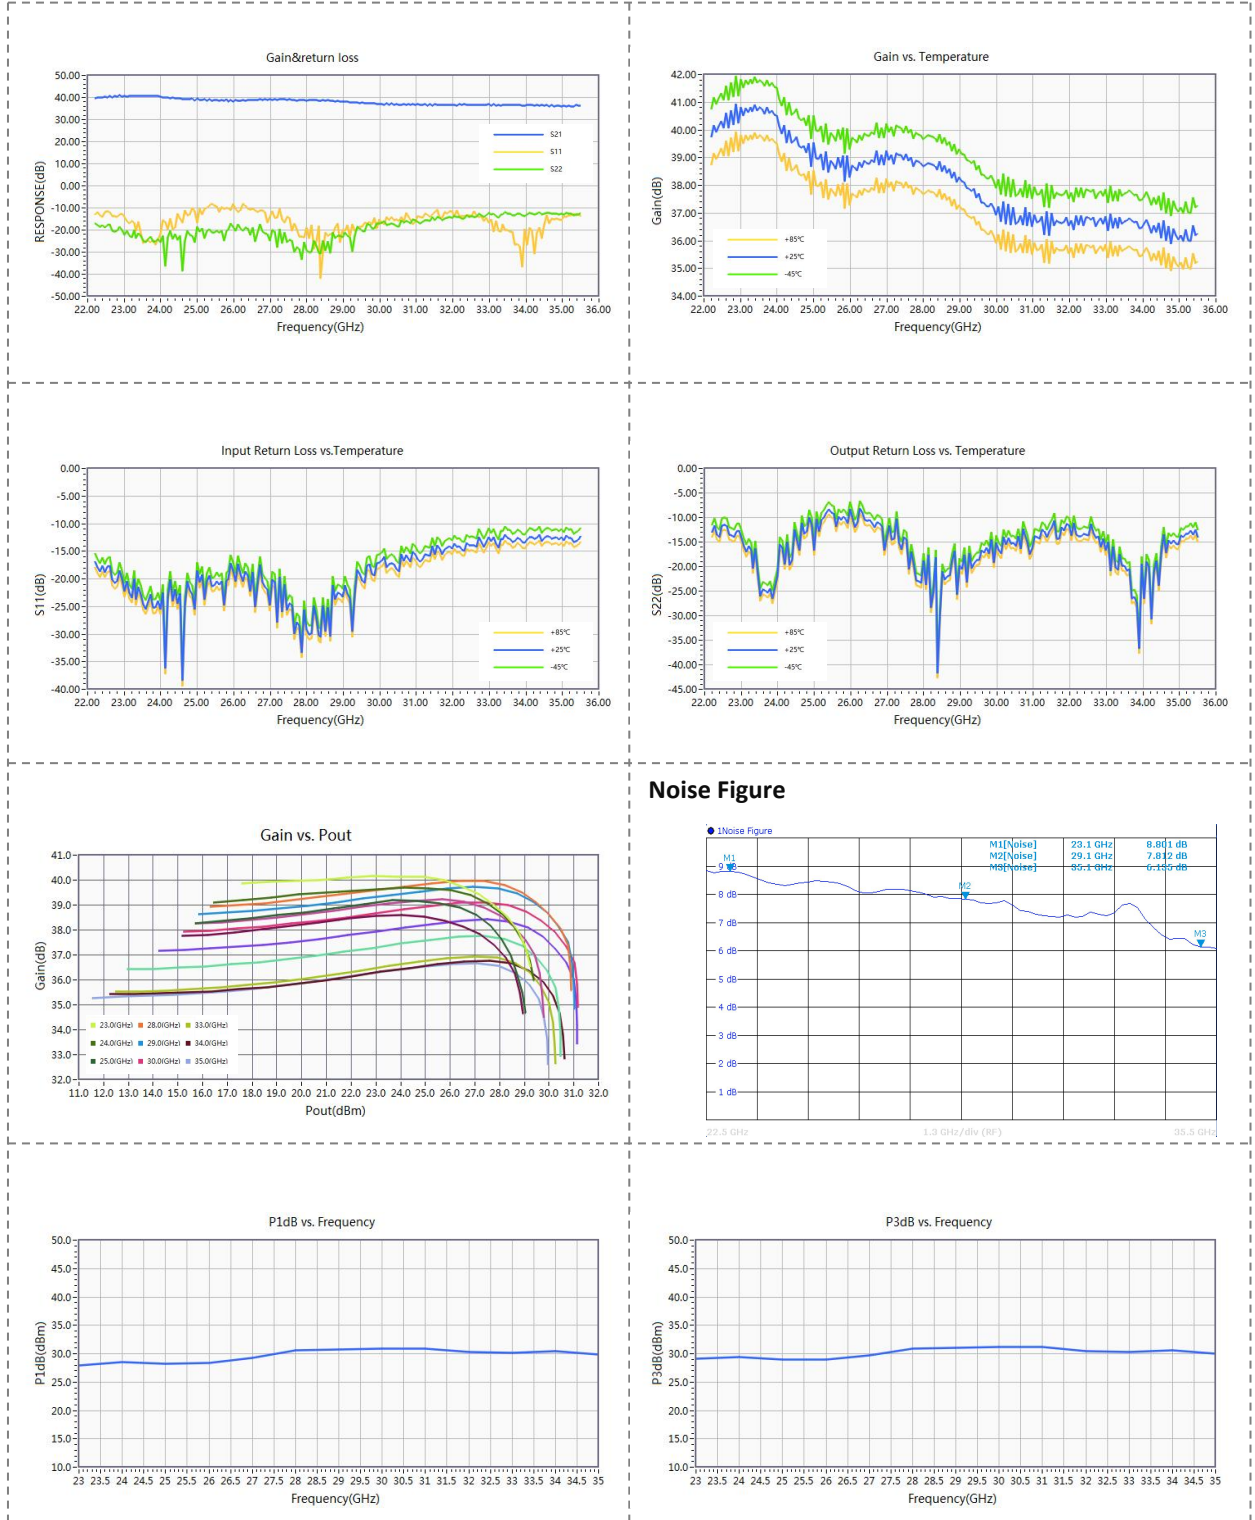

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com