


0.3-43GHz Broadband Switch

P/N: MZSP4T00343GA



Description:

The switch is a broadband PIN switch with a typical Loss insertion of 4.0 dB and a high isolation of 65dB across the frequency range of 0.3 to 43 GHz. The typical switch speed 50ns. The DC power requirement for the switch is +/-5 V/50 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.3-43		GHz
Insertion Loss		4.0	5.8	dB
Isolation	48	65		dB
Input VSWR		1.8	2.0	-
Output VSWR		1.8	2.0	-
Switch Speed		50	100	ns
Power Handing			20	dBm
IIP3		30		dBm
DC Current (Vcc=+/-5V)		100/50		mA
Control Logic TTL		0/+5		v
Impedance		50		Ω
Input Output Connector		2.92-Female/2.92-Female		
Material		Aluminium\Gold Painting		
Weight		50g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


0.3-43GHz Broadband Switch

P/N: MZSP4T00343GA



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

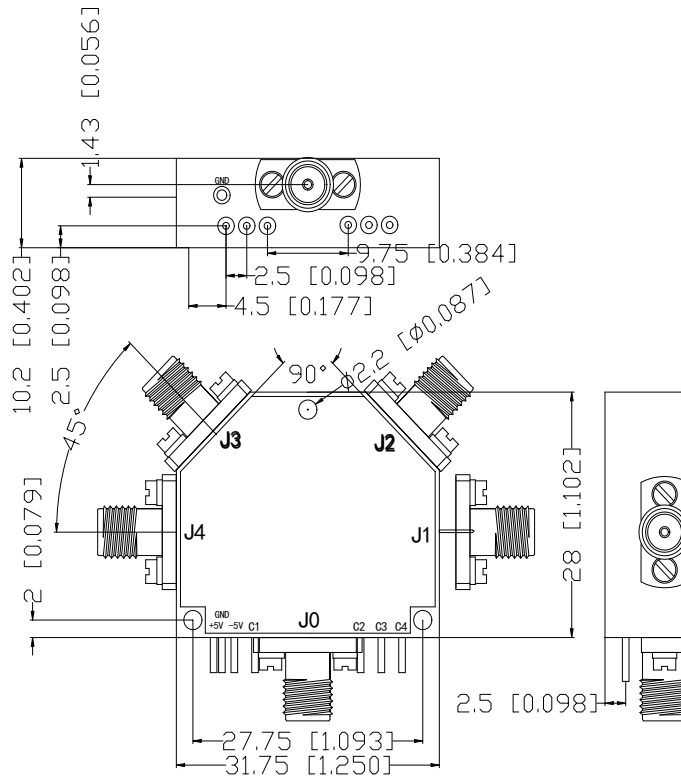

Truth Table				
TTL Control Input				Signal Path State
C4	C3	C2	C1	
1	1	1	0	J0-J1
1	1	0	1	J0-J2
1	0	1	1	J0-J3
0	1	1	1	J0-J4

TTL Control Voltages & VDD	
Stage	Bias Condition
VDD	+5V ($\pm 5\%$)
VEE	-5V ($\pm 5\%$)
Low	0 to 0.8Vdc
High	2.0 to +5.0Vdc

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

0.3-43GHz Broadband Switch

P/N: MZSP4T00343GA



Performance Plot

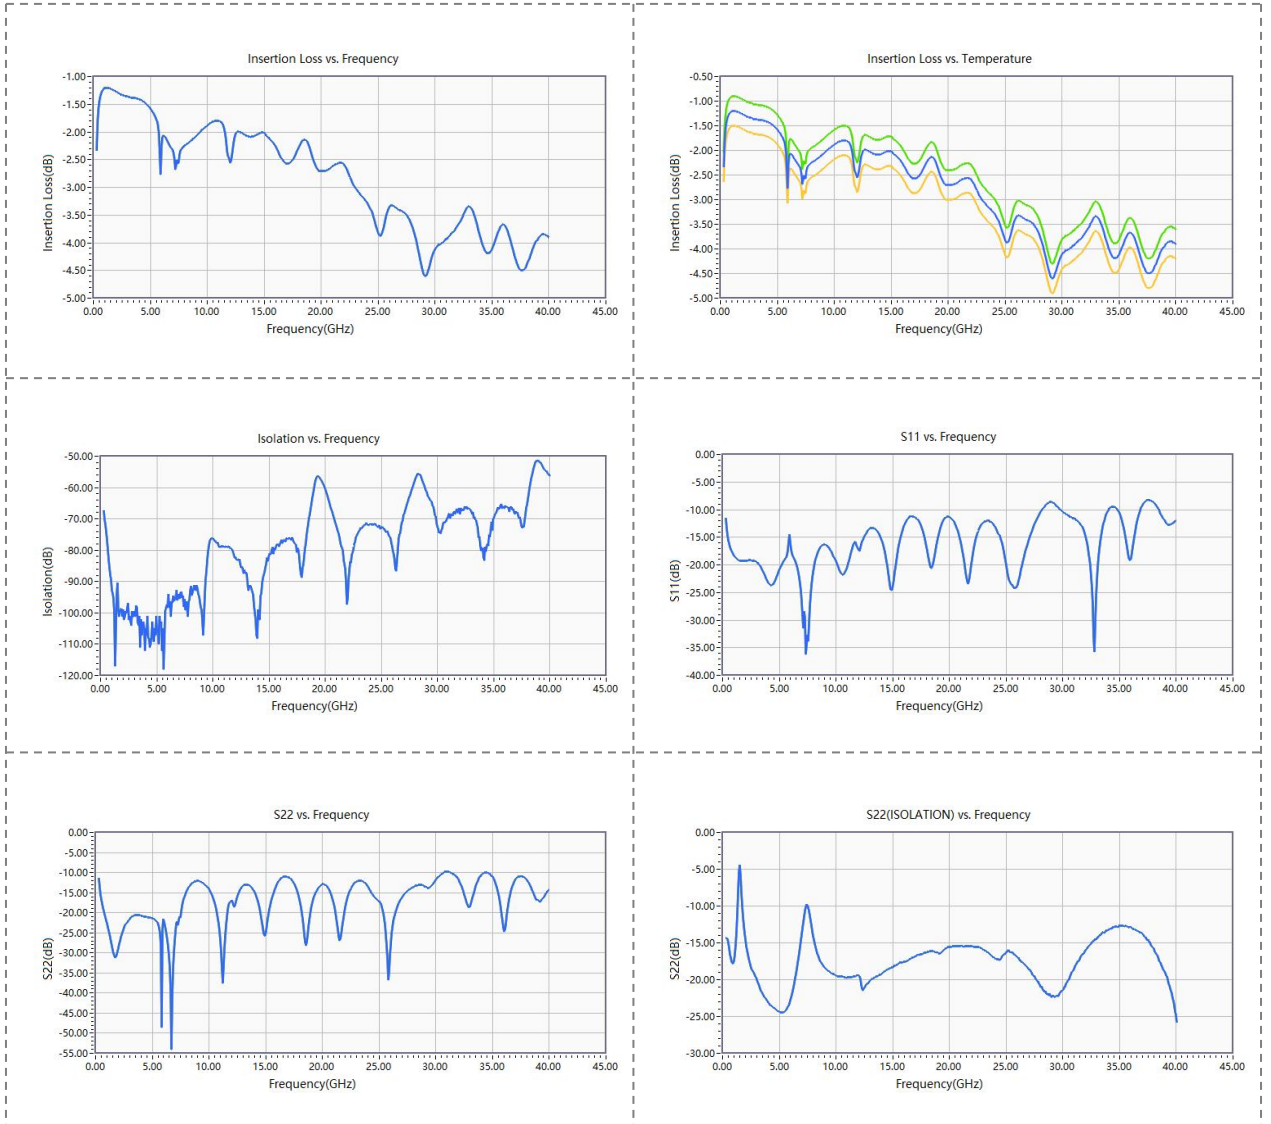

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com