


0.4-6GHz Broadband Switch

P/N: MZSPDT00406GA



Description:

The switch is a broadband PIN switch with a typical Loss insertion of 2 dB and a high isolation of 75dB across the frequency range of 0.4 to 6 GHz. The typical switch speed 100ns. The DC power requirement for the switch is +/-5 V/60 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.4-6		GHz
Insertion Loss			2	dB
Isolation	75			dB
Input VSWR			1.2	-
Output VSWR			1.2	-
Switch Speed			100	ns
Power Handing	28			dBm
DC Current (Vcc=+/-5V)		60/50		mA
Control Logic TTL		0/+5		v
Impedance		50		Ω
Input Output Connector		SMA-Female/SMA-Female		
Switch Type		Absorption		
Material		Aluminium\Gold Painting		
Weight		50g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


0.4-6GHz Broadband Switch

P/N: MZSPDT00406GA



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

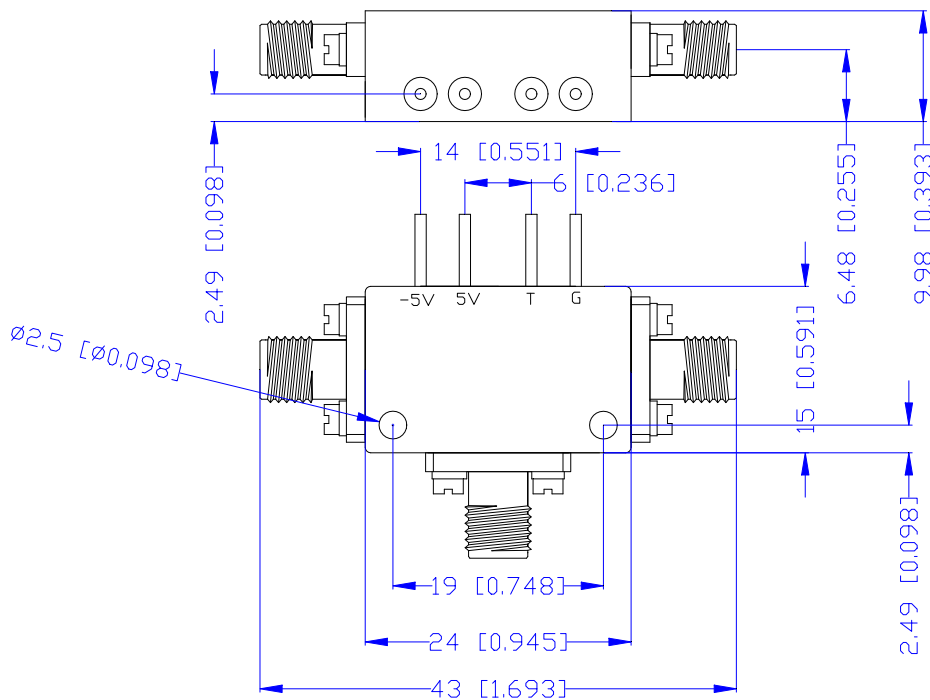

Truth Table	
TTL Control Input	Signal Path State
C1	
0	J0-J1
1	J0-J2

TTL Control Voltages &VDD	
Stage	Bias Condition
VDD	+5V ($\pm 10\%$)
Low	0 to 0.8Vdc
High	2.0 to +5.0Vdc

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

0.4-6GHz Broadband Switch

P/N: MZSPDT00406GA



Performance Plot

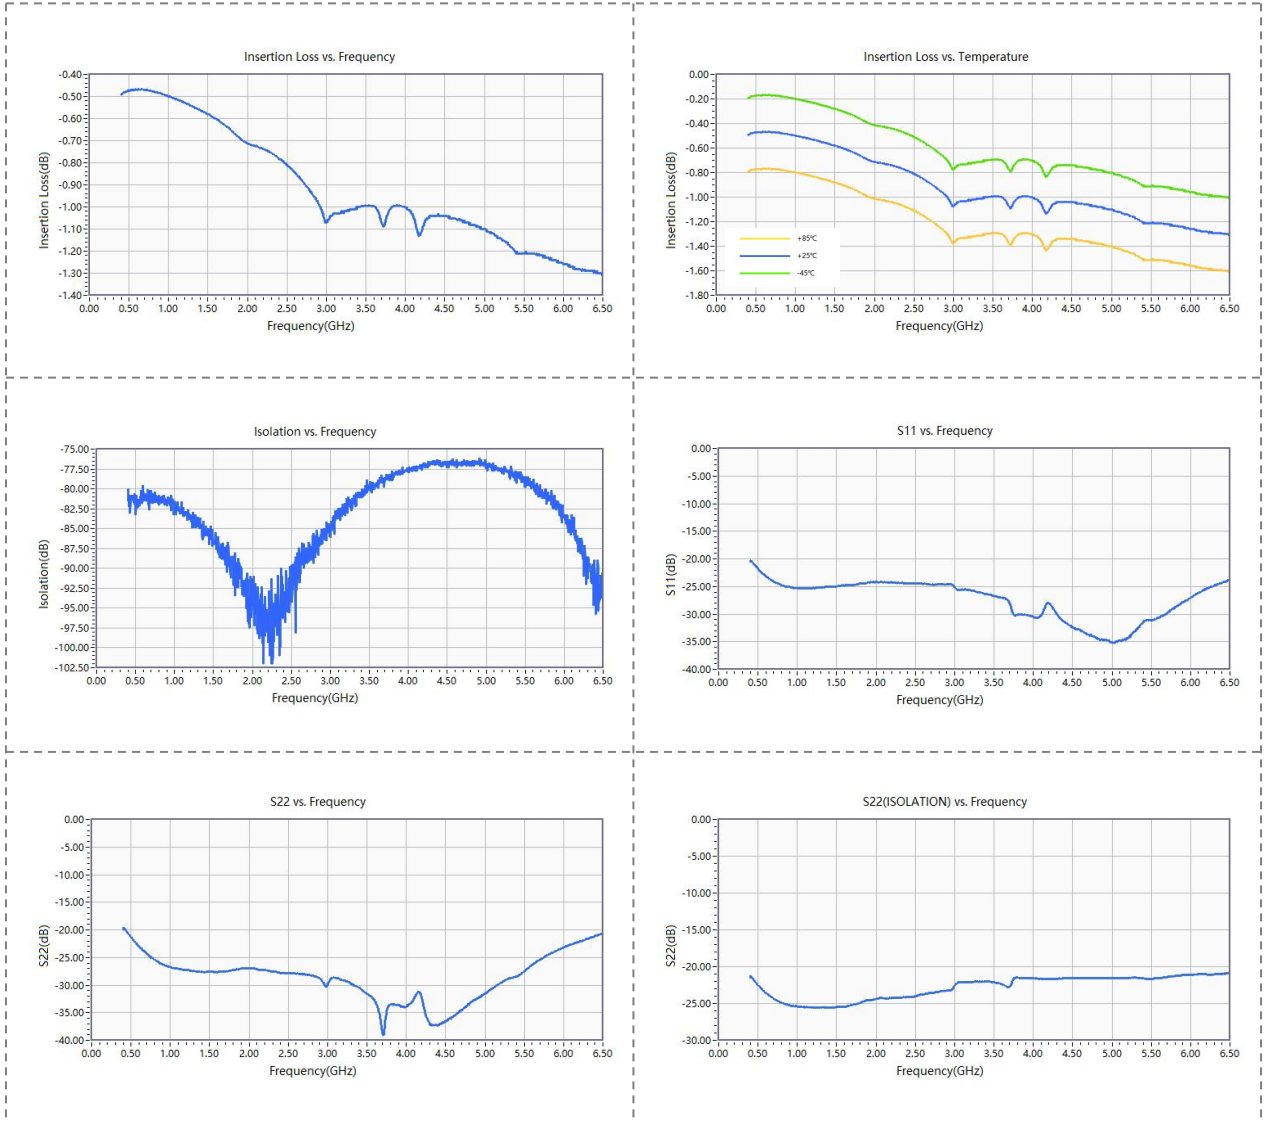

MICZEN THCNLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com