

# 8-19.7GHz 2way Power Divider

P/N: P208197GA



## Description:

The power divider is a 16way power divider with a typical Loss insertion of 0.7 dB and a typical isolation of 0.7dB across the frequency range of 8 to 19.7 GHz. The power divider can handling power 30W. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

## Electrical Specifications ( +25°C ) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		8-19.7		GHz
Insertion Loss			0.7	dB
Isolation	20			dB
Input VSWR		1.4	1.5	-
Output VSWR		1.4	1.5	-
Phase Unbalance			±4	°
Amplitude Unbalance		±0.3	±0.4	dB
Forward Power		30		W
Reverse Power		2		W
Impedance		50		Ω
Connector	SMA-Female/SMA-Female			
Material	Aluminum			
Weight	50g			
Package Sealing	Blue Color(Standard)			

## Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+105°C



OBSERVE  
PRECAUTIONS ELECTROSTATIC  
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


# 8-19.7GHz 2way Power Divider

P/N: P208197GA



## ■ Outline Drawing

All Dimensions in mm (inches) Tolerance  $\pm 0.25$  (0.01)

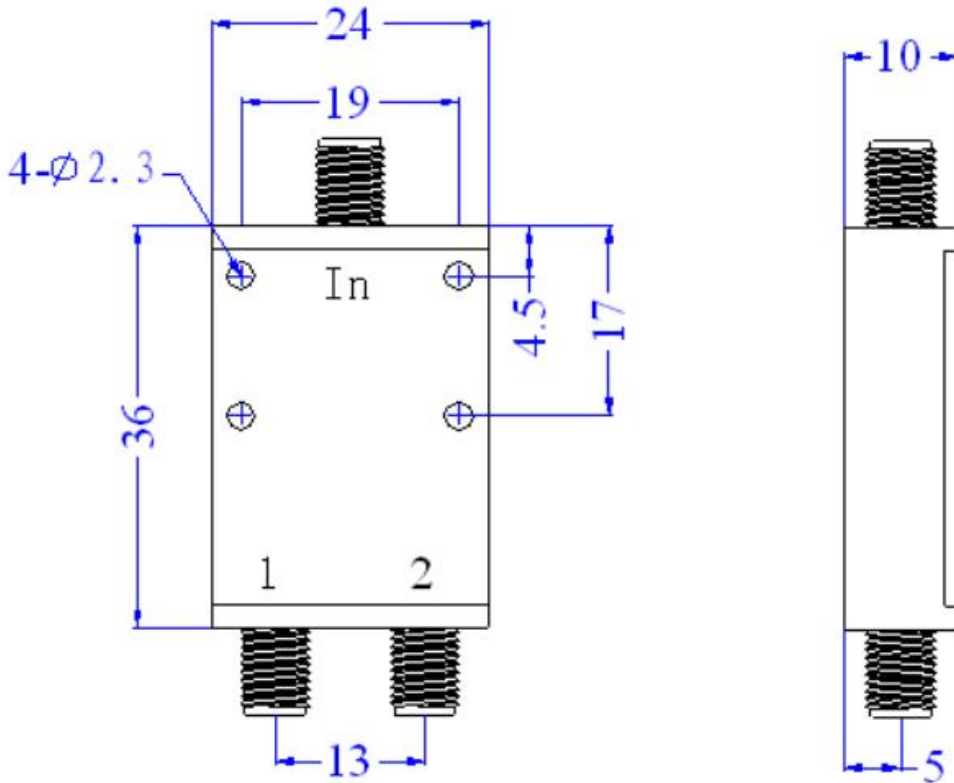

### NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

**MICZEN THCHNOLOGIES CO.,LTD.**

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com