


15-40GHz 2way Power Divider

P/N: P21540GA



Description:

The power divider is a 2 way power divider with The theory of loss is 3 dB and a typical isolation of 16 dB across the frequency range of 15 to 40GHz. The power divider can reach handling power 30W. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		15-40		GHz
Insertion Loss			1.5	dB
Isolation	15			dB
Input VSWR		1.6	1.8	-
Output VSWR			1.5	-
Phase Unbalance			±6	°
Amplitude Unbalance			±0.5	dB
Power Handling			30	W
Impedance		50		Ω
Input Connector		2.92-Female		
Output Connector		2.92-Female		
Material		Aluminum		
Weight		20g		
Package Sealing		Black Color (Standard)		

Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+105°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


15-40GHz 2way Power Divider

P/N: P21540GA



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

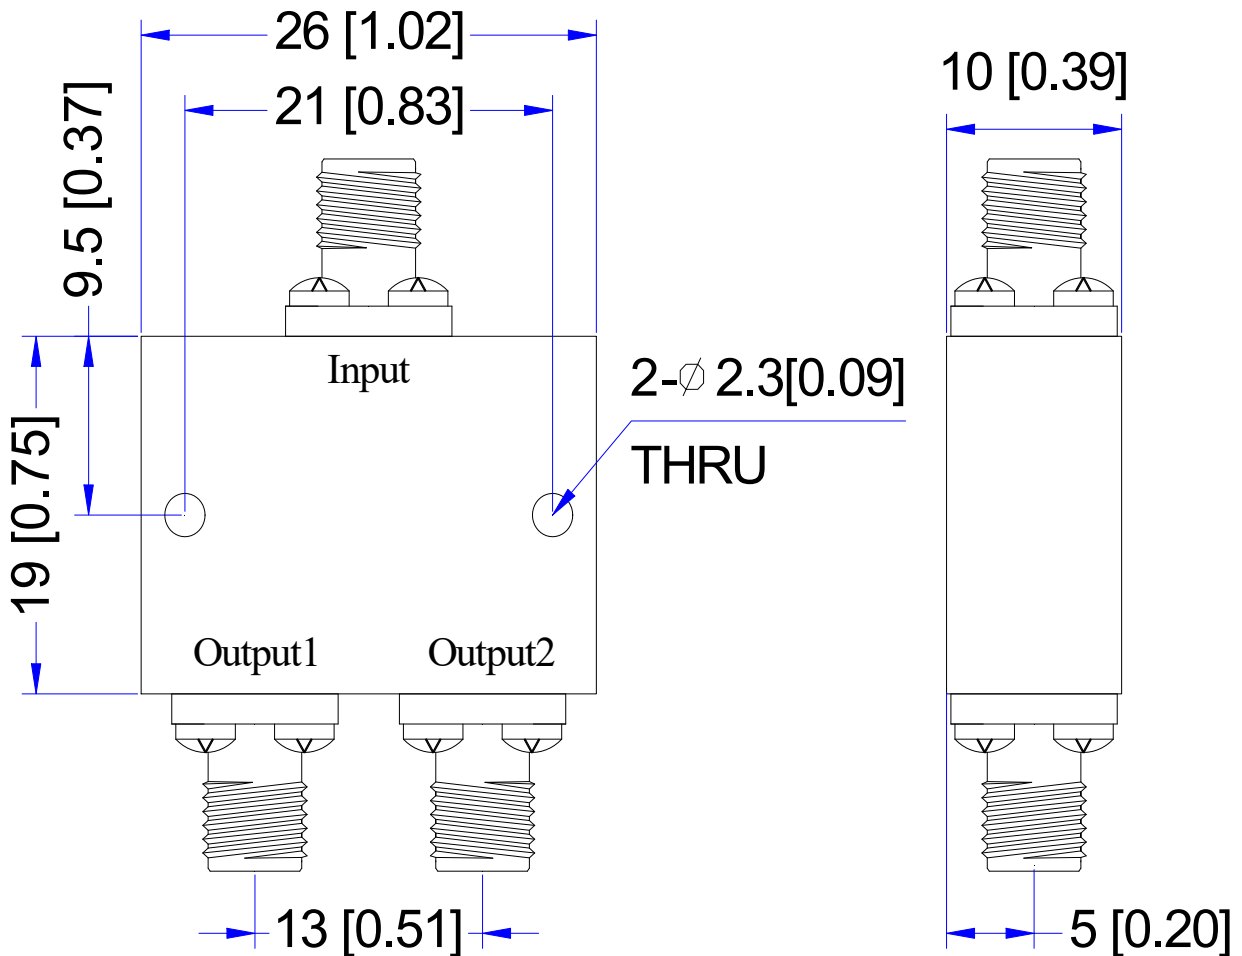

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com