

0.95-2.15GHz 4way Power Divider

P/N: P400950215GN



Description:

The power combiners is a 4way power divider with a typical insertion loss of 0.6dB and a typical isolation of 20 dB across the frequency range of 0.95 to 2.15 GHz. The power divider can reach handling power 2W. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

| Parameter | Min. | Typ. | Max. | Units |
|---------------------|------|-----------------------|-------|-------|
| Frequency Range | | 0.95-2.15 | | GHz |
| Insertion Loss | | 0.6 | 0.7 | dB |
| Isolation | 20 | | | dB |
| Input VSWR | | | 1.3 | - |
| Output VSWR | | | 1.3 | - |
| Phase Unbalance | | | - | ° |
| Amplitude Unbalance | | | ±0.35 | dB |
| Forward Power | | | 50 | W |
| Reverse Power | | | 5 | W |
| Impedance | | 50 | | Ω |
| Connector | | N-Female | | |
| Material | | Aluminum | | |
| Weight | | 480g | | |
| Package Sealing | | Black Color(Standard) | | |

Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+105°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


0.95-2.15GHz 4way Power Divider

P/N: P400950215GN



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

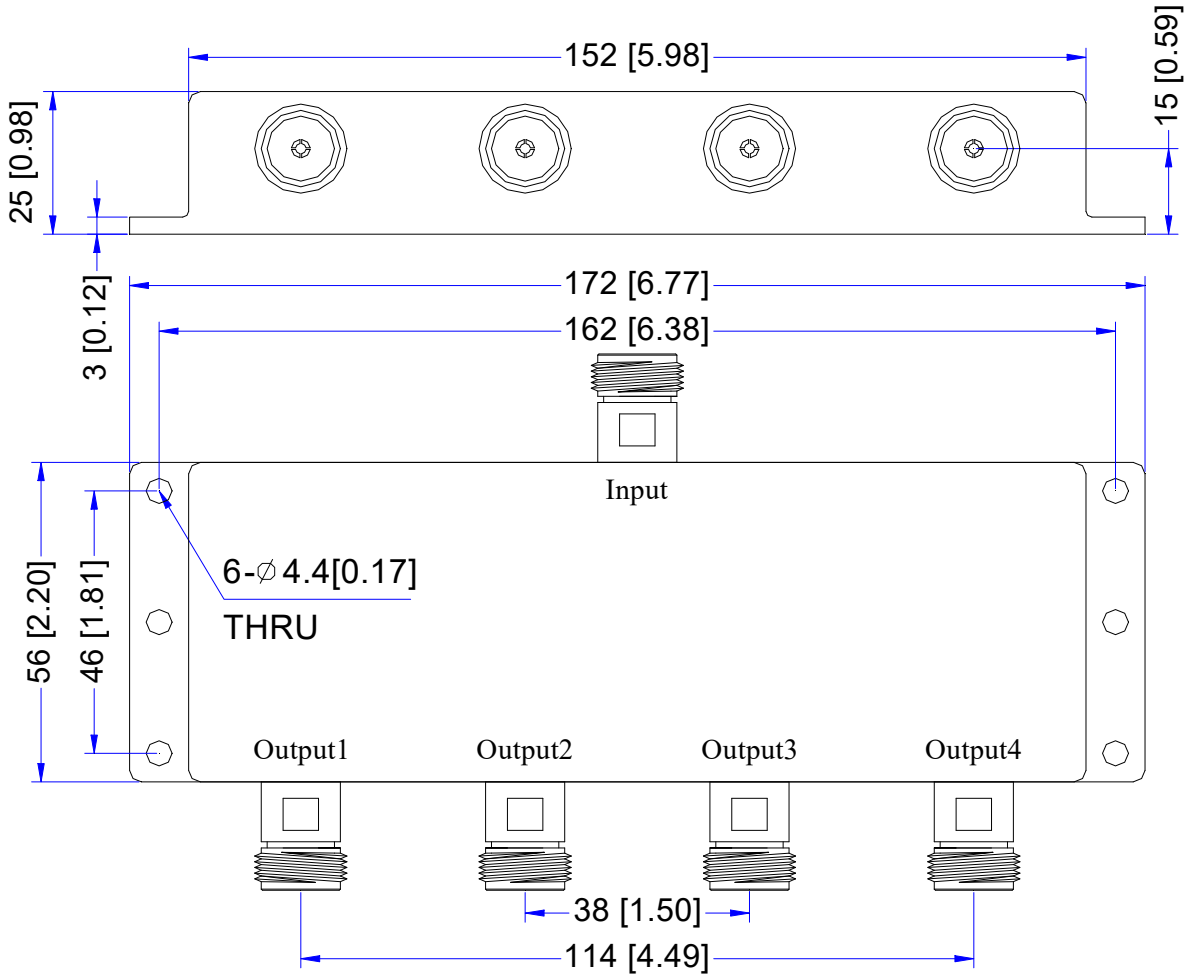

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com