

1-18GHz Power Amplifier

P/N: PA0118GAC1W



Description:

The power amplifier is a 1W power amplifier with a small signal gain of 33 dB across the frequency range of 1 to 18 GHz. The output power P-1 30dBm. The AC power requirement for the amplifier is 220/50Hz VAC .Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		1-18		GHz
Gain	30	33		dB
Gain Flatness		±2.0	±2.5	dB
Input VSWR		2.0	2.2	-
Output VSWR		2.0	2.2	-
Noise Figure			5	dB
Output Power for (P1dB)	30			dBm
Output Power Psat		31		dBm
Spurious		60		dBc
Input Max Power(no damage)			+5	dBm
AC		110~220V/50Hz		
Impedance		50		Ω
Input/Output Connector		SMA-Female/SMA-Female		
Material		Aluminium/Black anodizing		
Weight		19kg		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


1-18GHz Power Amplifier

P/N: PA0118GAC1W



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

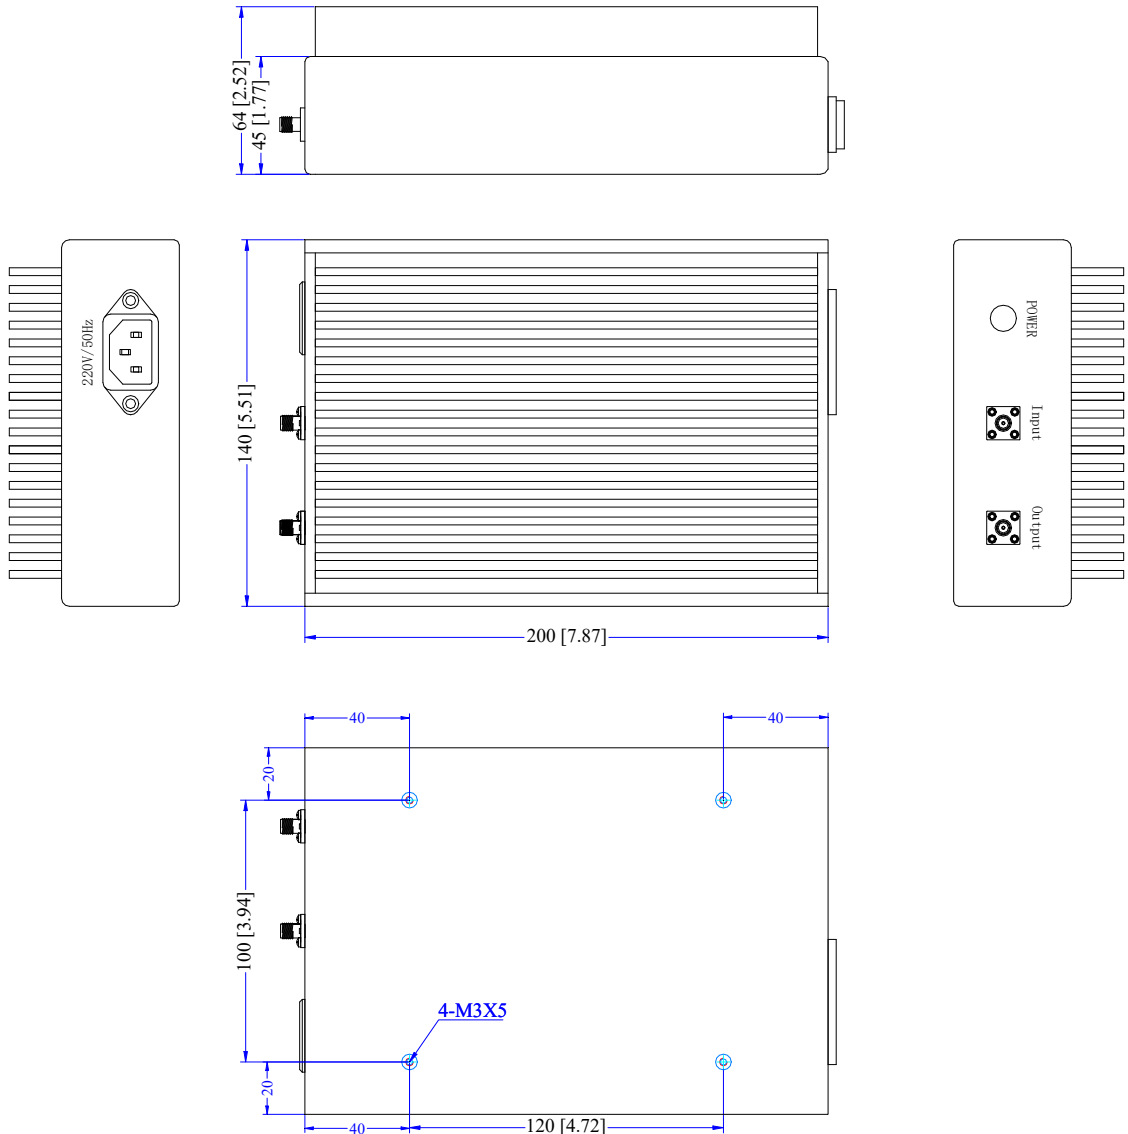

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

1-18GHz Power Amplifier

P/N: PA0118GAC1W



Performance Plot

