

18-40GHz 0.4W Power Amplifier

P/N: PA1840GAC0.4W



Description:

The power amplifier is a 0.4W power amplifier with a typical small signal gain of 35 dB across the frequency range of 18 to 40 GHz. The typical output power 29dBm. The DC power requirement for the amplifier is +24 VDC/0.9 A. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		18-40		GHz
Gain	33	35		dB
Gain Flatness			±3.5	dB
Input VSWR			2.2	-
Output VSWR			2.5	-
Noise Figure		5		dB
Output Power Psat	26	29		dBm
Spurious		-60		dBc
Input Max Power(no damage)			0	dBm
DC Current (Vcc=+24V)			900	mA
Amplitude and Phase Stability	0.2dB; 3°@15minute			-
Batch Amplitude Consistency			± 1.5	dB
Impedance		50		Ω
Input/Output Connector	2.92-Female/2.92-Female			
Material	Aluminium			
Weight				-
Package Sealing	General Sealing (Standard)			

Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


18-40GHz 0.4W Power Amplifier

P/N: PA1840GAC0.4W



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

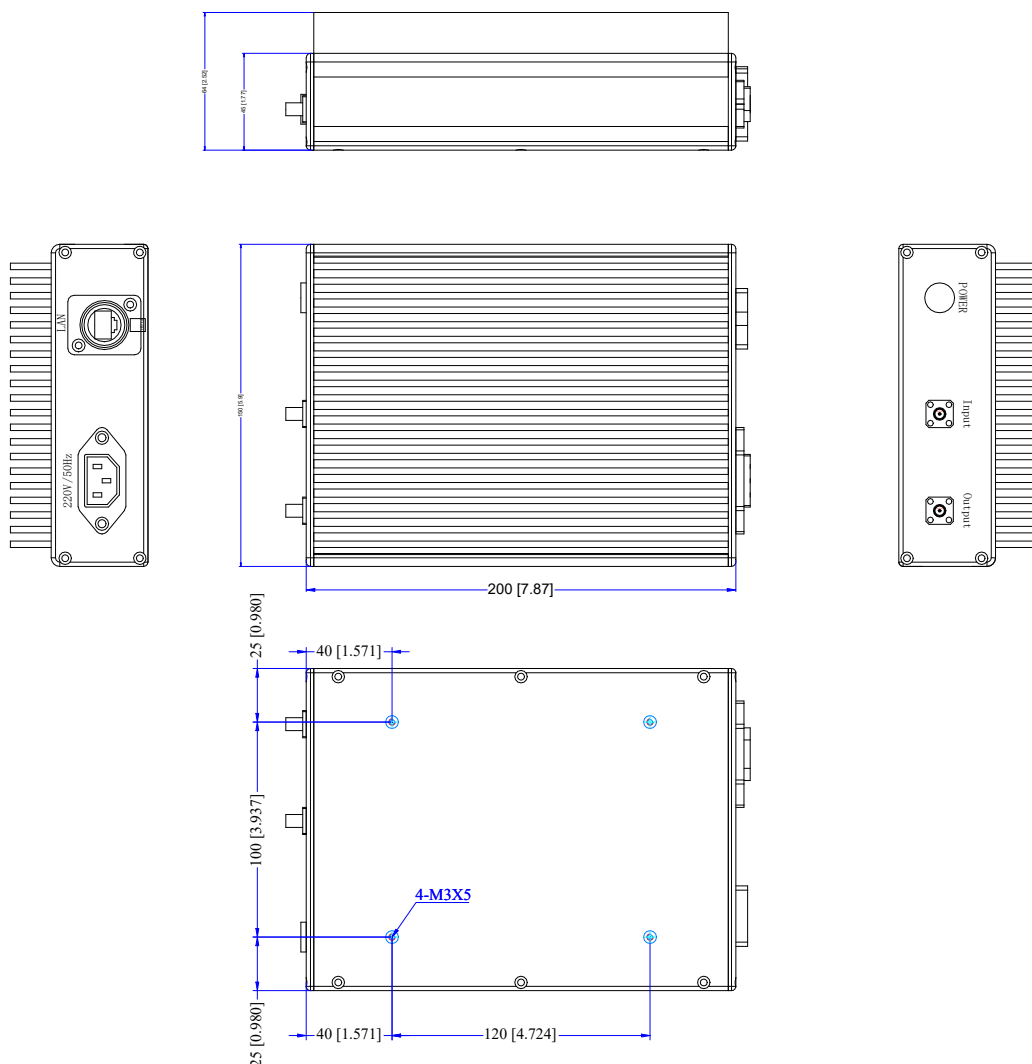

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com