

25-30GHz 0.4W Power Amplifier

P/N: PA250300GA0.4W



Description:

The power amplifier is a 0.4W power amplifier with a typical small signal gain of 27 dB across the frequency range of 25 to 30 GHz. The typical output power Psat 26 dBm. The DC power requirement for the amplifier is +12 VDC/0.5 A. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		25-30		GHz
Gain	25	27	30	dB
Gain Flatness		±2		dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Output Power for (P1dB)		25		dBm
Output Power Psat	25	26		dBm
Noise Figure		6		dB
Spurious	60			dBc
Input Max Power(no damage)			5	dBm
DC Current (Vcc=+12V)(@P1dB)		0.5		A
Impedance		50		Ω
Input/Output Connector		2.92-Female/2.92-Female		
Material		Aluminium/Gold Plating		
Weight			-	
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


25-30GHz 0.4W Power Amplifier

P/N: PA250300GA0.4W



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

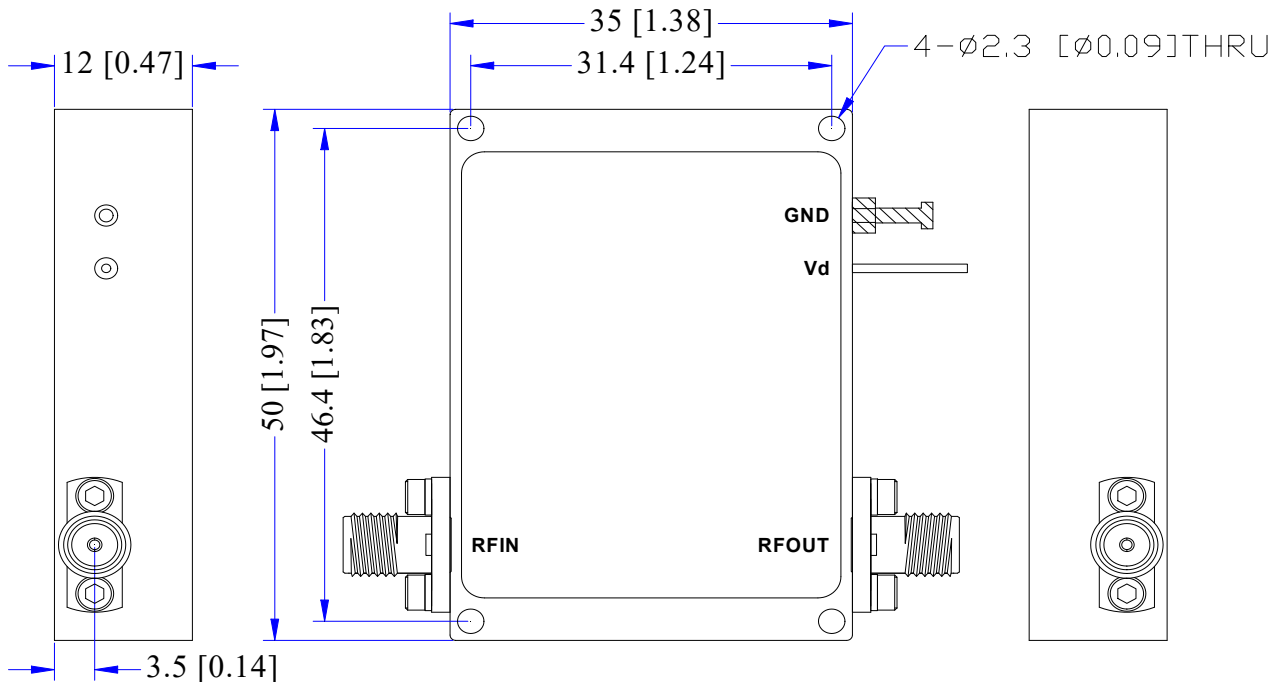

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com