

26.5-40GHz Power Amplifier

P/N: PA265400GAC1W



Description:

The power amplifier is a power amplifier with a typical small signal gain of 38 dB across the frequency range of 26.5 to 40 GHz. The typical output power is 32 dBm. The AC power requirement for the amplifier is 220/50Hz VAC. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		26.5-40		GHz
Gain	35	38		dB
Gain Flatness		±2.5	±3	dB
Input VSWR			2.0	-
Output Power Psat	30	32		dBm
Input Max Power(no damage)			10	dBm
Spurious	60	65		dBc
Harmonic	20			dBc
Supply Voltage		220/50Hz		VAC
Impedance		50		Ω
Input/Output Connector		2.92-Female/2.92-Female		
Interface Control		DB9		
Material		Aluminium		
Weight		-		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -20°C~+50°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


26.5-40GHz Power Amplifier

P/N: PA265400GAC1W



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

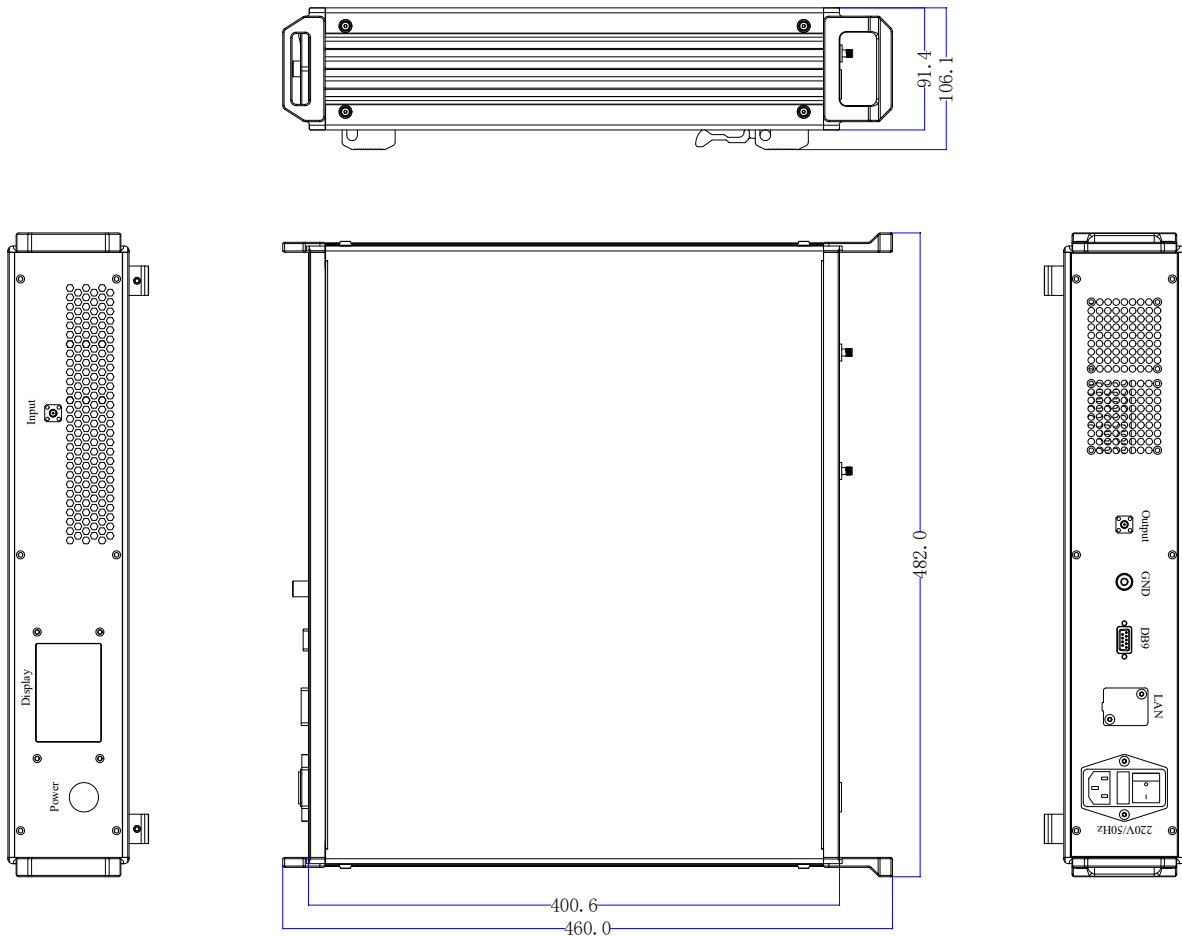

Function:

1. Product with forced air cooling
2. Product with overheating protection
3. Products with output VSWR protection
4. Products with status display
5. Products with overload protection

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

26.5-40GHz Power Amplifier

P/N: PA265400GAC1W



■ Performance Plot

