

18-26.5GHz Low Noise Amplifier

P/N: QLLNA180265GA20



Description:

The amplifier is a low noise amplifier with a typical small signal gain of 20 dB and a typical noise figure of 2.8 dB across the frequency range of 18 to 26.5 GHz. The typical output power P-1 20dBm. The DC power requirement for the amplifier is +12 VDC/275 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		18-26.5		GHz
Gain	20			dB
Gain Flatness			±1.5	dB
Input VSWR			2.0	-
Output VSWR			2.0	-
Output Power for (P1dB)	20			dBm
Saturated Output Power (Psat)		21		dBm
Suprious		-60		dBc
Noise Figure			2.8	dB
Output IP3		29		dBm
Input Max Power(no damage)			11	dBm
DC Voltage	+9		+15	V
DC Current (Vcc=+12V)		275		mA
Impedance		50		Ω
Input/Output Connector		SMA-Female/SMA-Female		
Material		Aluminium/Gold Painting		
Weight		50g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

18-26.5GHz Low Noise Amplifier

P/N: QLLNA180265GA20



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

18-26.5GHz Low Noise Amplifier

P/N: QLLNA180265GA20



Performance Plot

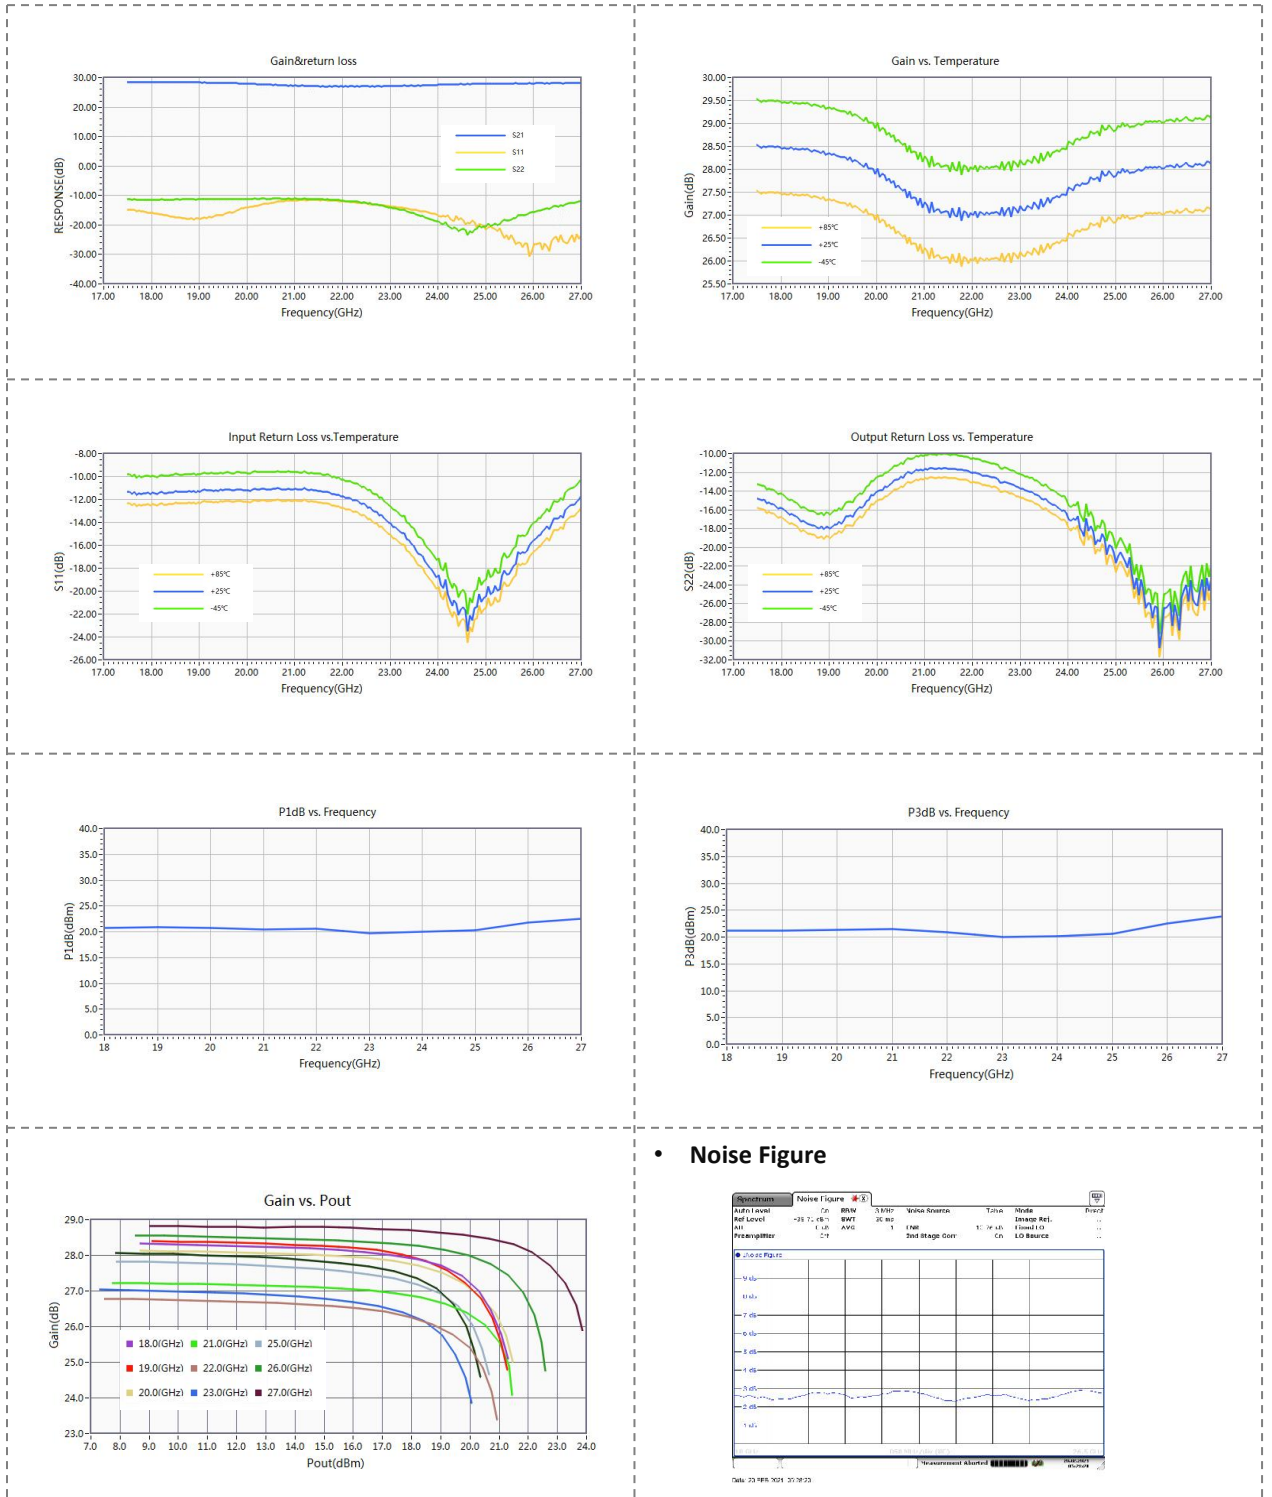

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com