


0.4-18GHz Broadband Switch

P/N: SP16T004180GS55A



Description:

The switch is a broadband PIN switch with a typical Loss insertion of 7.5 dB and a high isolation of 60dB across the frequency range of 0.4 to 18 GHz. The typical switch speed 50ns. The DC power requirement for the switch is +5 V/600mA -5V/50mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.4-18		GHz
Insertion Loss		7.5	8.5	dB
Isolation	55	60		dB
Input VSWR		1.5	2.2	-
Output VSWR		1.5	2.2	-
Switch Speed		50	100	ns
Phase consistency		±5	±8	°
Phase stability		±1	±3	°
Amplitude consistency		±1	±1.5	dB
Amplitude stability		±0.2	±0.4	dB
Power Handing			0.25	W
Power(+/-5V)		600/-50		mA
Control Logic TTL		Low=0/High=1		-
Impedance		50		Ω
Input Output Connector		SMA-Female/SMA-Female		
Switch Type		Absorption		
Material		Aluminium\Nickel Painting		
Weight		200g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


0.4-18GHz Broadband Switch

P/N: SP16T004180GS55A



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

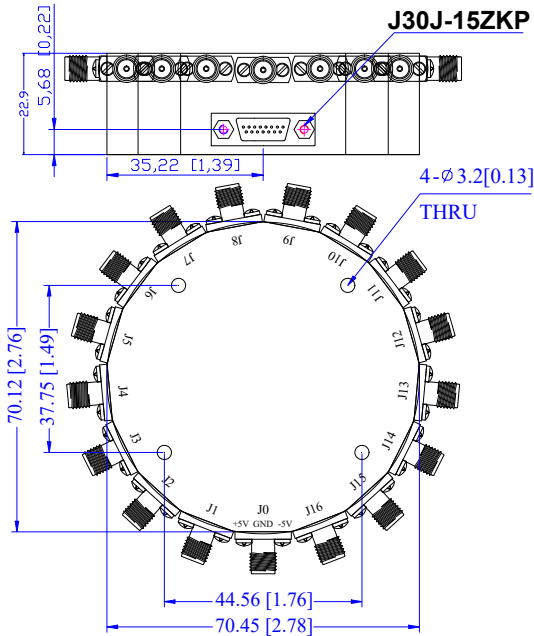

TTL Control Voltages & VDD	
Stage	Bias Condition
VDD	+5V ($\pm 5\%$)
VEE	-5V ($\pm 5\%$)
Low	0 to 0.8Vdc
High	2.0 to +5.0Vdc

Truth Table				
Control TTL Input				Signal Path State
C4	C3	C2	C1	
0	0	0	0	Jo-J1
0	0	0	1	Jo-J2
0	0	1	0	Jo-J3
0	0	1	1	Jo-J4
0	1	0	0	Jo-J5
0	1	0	1	Jo-J6
0	1	1	0	Jo-J7
0	1	1	1	Jo-J8
1	0	0	0	Jo-J9
1	0	0	1	Jo-J10
1	0	1	0	Jo-J11
1	0	1	1	Jo-J12
1	1	0	0	Jo-J13
1	1	0	1	Jo-J14
1	1	1	0	Jo-J15
1	1	1	1	Jo-J16

J30J-15ZKP Define	
1	C1
2	C2
3	C3
4	C4
5	NC
6	NC
7	NC
8	NC
9	+5V
10	+5V
11	-5V
12	-5V
13	GND
14	GND
15	NC

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com