


0.3-18GHz Broadband Switch

P/N: SP4T003180GB55A



Description:

The switch is a broadband PIN switch with a typical Loss insertion of 3 dB and a high isolation of 55dB across the frequency range of 0.3 to 18 GHz. The typical switch speed 100ns. The DC power requirement for the switch is +5V/150 mA -5V/-50 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.3-18		GHz
Insertion Loss		3	4.0	dB
Isolation	55			dB
Input VSWR		2.2	2.5	-
Output VSWR		2.2	2.5	-
Switch Speed		100	200	ns
Power Handing			23	dBm
Amplitude repeated switching stability		0.2		dB
Phase repeated switching stability		3		°
Amplitude consistency		± 1		dB
Phase consistency		± 30		°
DC Current (Vcc=+/-5V)		150/-50		mA
DC and control interface		J30J-15ZK		-
Control Logic TTL		0/+5		v
Impedance		50		Ω
Input Output Connector		SMA-Female/SMA-Female		
Switch Type		Absorption		
Material		Aluminium\Gold Painting		
Weight		-		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE PRECAUTIONS ELECTROSTATIC SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


0.3-18GHz Broadband Switch

P/N: SP4T003180GB55A



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

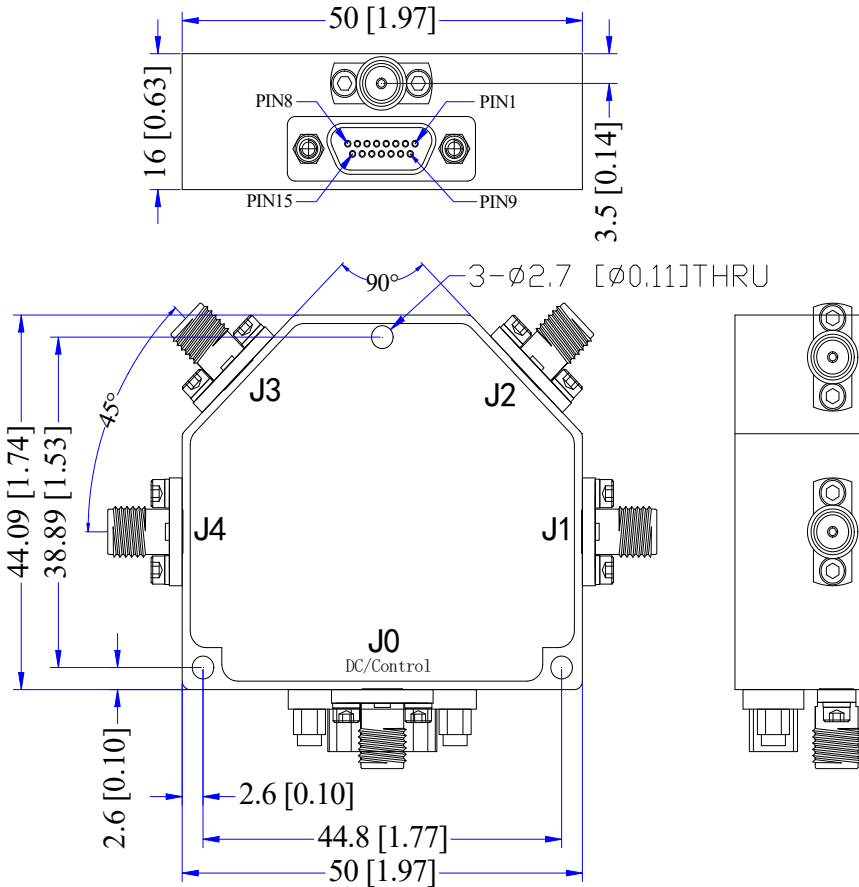

J30J-15ZK Define	
1	+5V
2	-5V
3	GND
4	C1
5	C2
6	C3
7	C4
8-15	NC

Truth Table				
TTL Control Input				Signal Path State
C4	C3	C2	C1	
1	1	1	0	J0-J1
1	1	0	1	J0-J2
1	0	1	1	J0-J3
0	1	1	1	J0-J4

TTL Control Voltages & VDD	
Stage	Bias Condition
VDD	+5V ($\pm 5\%$)
VEE	-5V ($\pm 5\%$)
Low(0)	0 to 0.8Vdc
High(1)	2.0 to +5.0Vdc

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com