

0.06-10GHz Broadband Switch

P/N: SP4T006100GW60R



Description:

The switch is a broadband PIN switch with a typical Loss insertion of 2.7 dB and a high isolation of 60dB across the frequency range of 0.06 to 10 GHz. The typical switch speed 100ns. The DC power requirement for the switch is +5 V/250 mA -5V/50mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.06-10		GHz
Insertion Loss		2.7		dB
Isolation	60			dB
Input VSWR		1.5	2	-
Output VSWR		1.5	2	-
Switch Speed(Hot switching)		100		ns
RF Input Power			30	dBm
DC Current (Vcc=+5V/-5V)		250/50		mA
Control Logic TTL		"0"=Low ; "1"=High		v
Impedance		50		Ω
Input Output Connector		SMA-female/SMA-female		
Switch Type		Reflective		
Material		Aluminium\Native conductive oxidation		
Weight		72g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -10°C~+50°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


0.06-10GHz Broadband Switch

P/N: SP4T006100GW60R



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

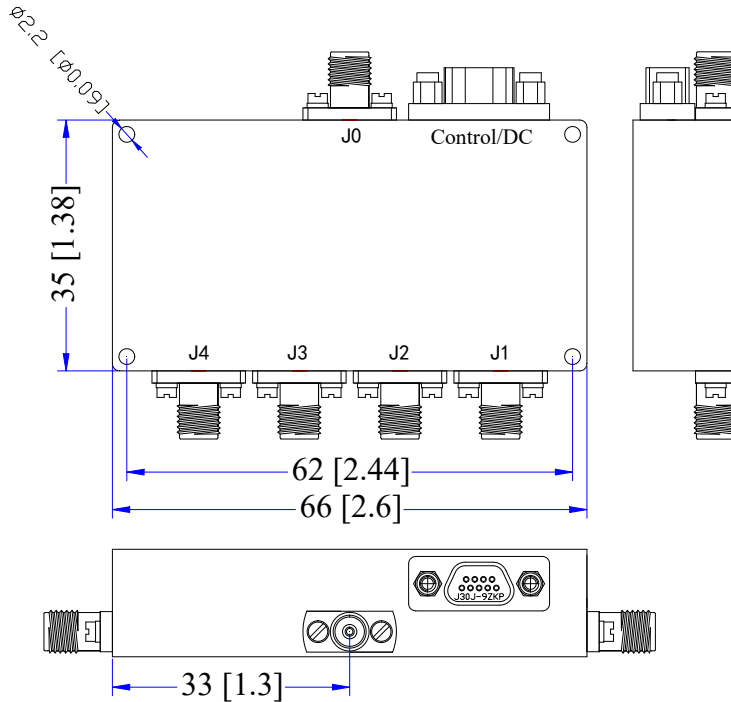

Truth Table				
Control TTL Input				Signal Path State
C1	C2	C3	C4	
1	0	0	0	Jo-J1
0	1	0	0	Jo-J2
0	0	1	0	Jo-J3
0	0	0	1	Jo-J4

TTL Control Voltages &VDD	
Stage	Bias Condition
VDD	+5V ($\pm 10\%$)
VEE	-5V ($\pm 10\%$)
Low	0 to 0.8Vdc
High	2.0 to +5.0Vdc

J30J-9ZKP Define	1	2	3	4	5	6	7	8	9
	+5V	-5V	GND	C1	C2	C3	C4	NC	NC

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com