


0.3-18GHz Broadband Switch

P/N: SP8T003180GA60A



Description:

The switch is a broadband PIN switch with a typical Loss insertion of 4.5 dB and a high isolation of 60dB across the frequency range of 0.3 to 18 GHz. The typical switch speed 100ns. The DC power requirement for the switch is +5V/350 mA 、 -5V/-50 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.3-18		GHz
Insertion Loss		4.5	5	dB
Isolation	60			dB
Input VSWR		1.8	2.4	-
Output VSWR		1.8	2.4	-
Switch Speed		80	100	ns
Power Handing			23	dBm
Amplitude repeated switching stability		0.2		dB
Phase repeated switching stability		3		°
Amplitude consistency		±0.5		dB
Phase consistency		±15		°
Same batch consistency (AM/PH)		1.5dB/30°		dB/°
DC Current (Vcc=+/-5V)		350/-50		mA
Control Logic TTL		0/+5		v
Impedance		50		Ω
Input Output Connector		SMA-Female/SMA-Female		
Switch Type		Absorption		
Material		Aluminium\Gold Painting		
Weight		100g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


0.3-18GHz Broadband Switch

P/N: SP8T003180GA60A



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

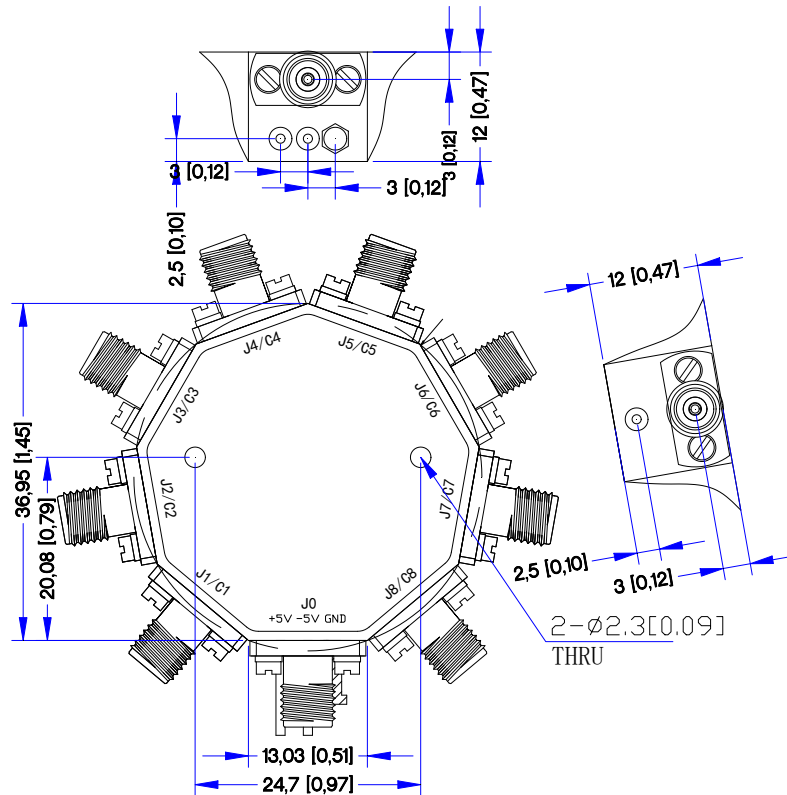

Truth Table								Signal Path State
Control TTL Input								
E8	E7	E6	E5	E4	E3	E2	E1	
1	1	1	1	1	1	1	0	J0-J1
1	1	1	1	1	1	0	1	J0-J2
1	1	1	1	1	0	1	1	J0-J3
1	1	1	1	0	1	1	1	J0-J4
1	1	1	0	1	1	1	1	J0-J5
1	1	0	1	1	1	1	1	J0-J6
1	0	1	1	1	1	1	1	J0-J7
0	1	1	1	1	1	1	1	J0-J8

TTL Control Voltages & VDD	
Stage	Bias Condition
VDD	+5V ($\pm 5\%$)
VEE	-5V ($\pm 5\%$)
Low(0)	0 to 0.8Vdc
High(1)	2.0 to +5.0Vdc

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com