

# 0.3-18GHz Broadband Switch

## P/N: SPDT003180GB55A



### Description:

The switch is a broadband PIN switch with a typical Loss insertion of 2.5 dB and a high isolation of 55dB across the frequency range of 0.3 to 18 GHz. The typical switch speed 100 ns. The DC power requirement for the switch is +5V/50 mA 、 -5V/-50 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

### Electrical Specifications ( +25°C ) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.3-18		GHz
Insertion Loss		2.5	3.5	dB
Isolation	55			dB
Input VSWR		2.0	2.5	-
Output VSWR		2.0	2.5	-
Switch Speed		100	200	ns
Power Handling			23	dBm
Amplitude repeated switching stability		0.2		dB
Phase repeated switching stability		3		°
Amplitude consistency		± 1		dB
Phase consistency		± 30		°
DC Current (Vcc=+/-5V)		50/50		mA
Control Logic TTL		0/+5		v
DC and control interface		J30J-15ZK		-
Impedance		50		Ω
Input Output Connector	SMA-Female/SMA-Female			
Switch type	Absorptive			
Material	Aluminium\Gold Painting			
Weight	-			
Package Sealing	General Sealing (Standard)			

### Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE PRECAUTIONS ELECTROSTATIC SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


# 0.3-18GHz Broadband Switch

P/N: SPDT003180GB55A



## Outline Drawing

All Dimensions in mm (inches) Tolerance  $\pm 0.25$  (0.01)

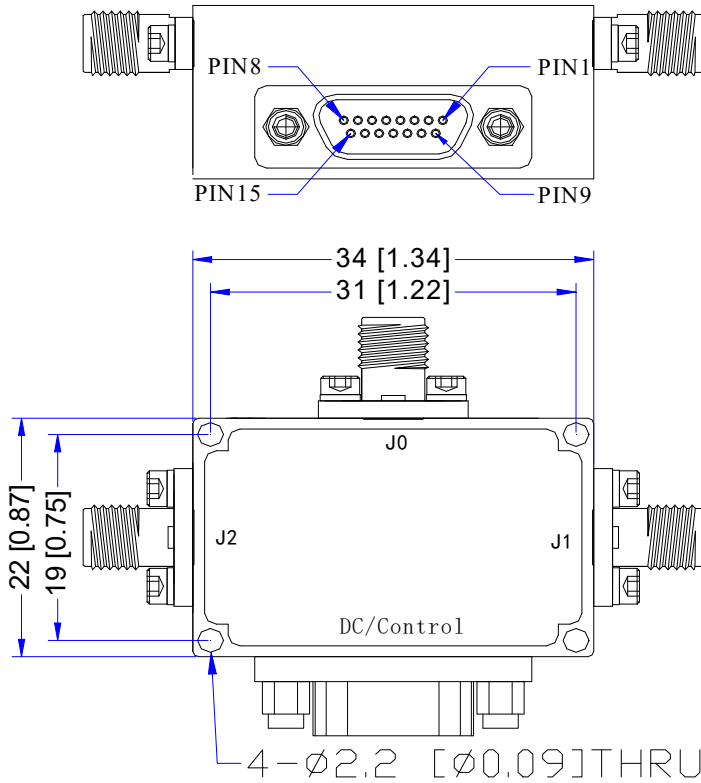

J30J-15ZK Define	
1	+5V
2	-5V
3	GND
4	C1
5-15	NC

Truth Table	
Control TTL Input	Signal Path State
C1	
0	J0-J1
1	J0-J2

TTL Control Voltages & VDD	
Stage	Bias Condition
VDD	+5V ( $\pm 5\%$ )
VEE	-5V ( $\pm 5\%$ )
Low(0)	0 to 0.8Vdc
High(1)	2.0 to +5.0Vdc

### NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com