


# 0.5-27GHz Broadband Switch

P/N:SPST00527GA



## Description:

The switch is a broadband PIN switch with a typical insertion loss of 3.0 dB and a high isolation of 65dB across the frequency range of 0.5 to 27 GHz. The typical switching speed is 100ns. The DC power requirement for the switch is +/-5 V/50/40 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

## Electrical Specifications ( +25°C ) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.5-27		GHz
Insertion Loss		3.0	4.0	dB
Isolation	60	65		dB
Input VSWR		1.8		-
Output VSWR		1.8		-
Switching Speed		100		ns
Power Handling			23	dBm
DC Current (Vcc=+/-5V)		50/40		mA
Control Logic TTL		0/+5		v
Impedance		50		Ω
Input Output Connector		SMA-k/SMA-K		
Switching Type		Absorption		
Material		Aluminium\Gold Painting		
Weight		15g		
Package Sealing		General Sealing (Standard)		

## Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE  
PRECAUTIONS ELECTROSTATIC  
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


# 0.5-27GHz Broadband Switch

P/N:SPST00527GA



## ■ Outline Drawing

All Dimensions in mm (inches) Tolerance  $\pm 0.25$  (0.01)

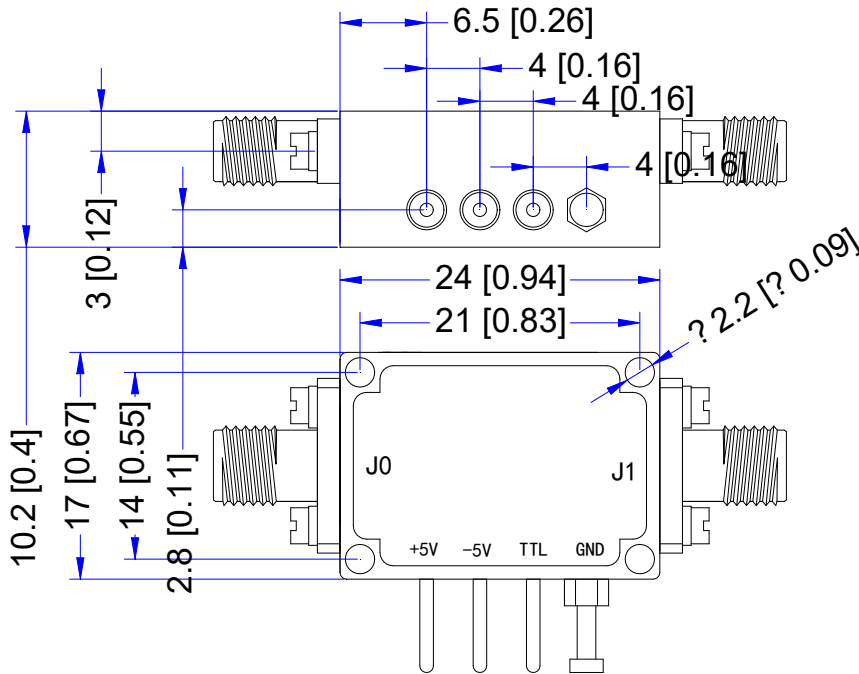

TTL Control Voltages & VDD	
Stage	Bias Condition
VDD	+5V ( $\pm 10\%$ )
VEE	-5V ( $\pm 10\%$ )
Low	0 to 0.8Vdc
High	2.0 to +5.0Vdc

Truth Table	
Control TTL Input	Signal Path State
C1	
0	J0-J1
1	OFF

### NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com