


6-18GHz 16way Power Divider

P/N: MZP160618GA



Description:

The power divider is a 16way power divider with a typical insertion loss of 1.5 dB and a typical isolation of 16dB across the frequency range of 6 to 18 GHz. The power divider can reach handling power 20W. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		6-18		GHz
Insertion Loss		1.5	2.0	dB
Isolation	15	16		dB
Input VSWR		1.6	1.8	-
Output VSWR		1.4	1.5	-
Phase Unbalance			±10	°
Amplitude Unbalance			±0.5	dB
Handling Power			20	W
Impedance		50		Ω
Connector		SMA-Female		
Material		Aluminum		
Weight		-g		
Package Sealing		Black Color(Standard)		

Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+105°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


6-18GHz 16way Power Divider

P/N: MZP160618GA



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

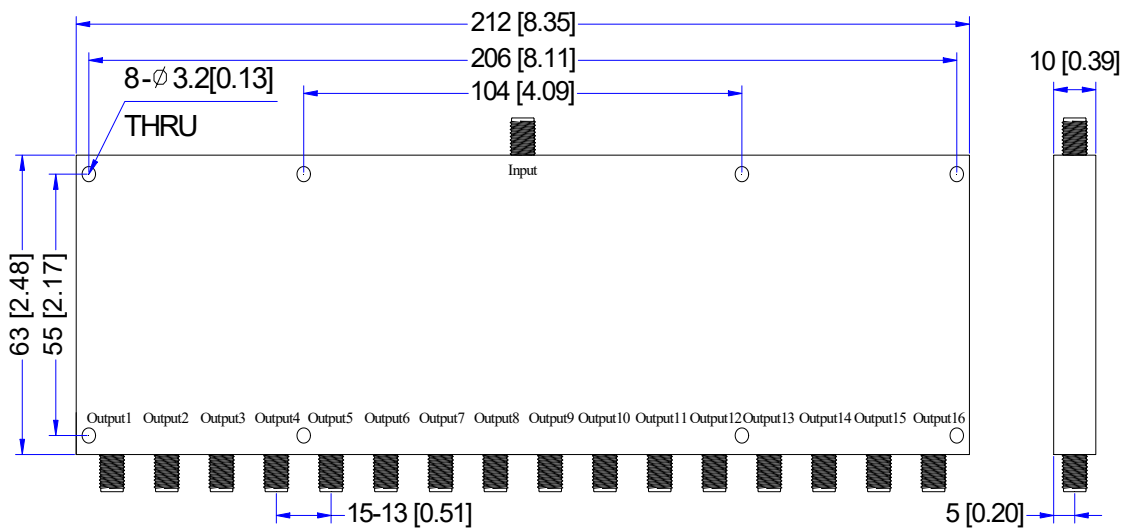

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com