

0.7-3GHz 16way Power Divider

P/N: P16007030GN



Description:

The power divider is a 16way power divider with a typical loss insertion of 2.5 dB and a typical isolation of 18 dB across the frequency range of 0.7 to 3 GHz. The power divider can reach handling power 200W. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.7-3		GHz
Insertion Loss			2.5	dB
Isolation	18			dB
Input VSWR		1.5	1.8	-
Output VSWR		1.4	1.5	-
Phase Unbalance			±8	°
Amplitude Unbalance			±0.8	dB
Power Handling		200		W
Impedance		50		Ω
Connector		N-Female		
Material		Aluminum		
Weight		/g		
Package Sealing		Blue Color(Standard)		

Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+105°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


0.7-3GHz 16way Power Divider

P/N: P16007030GN



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

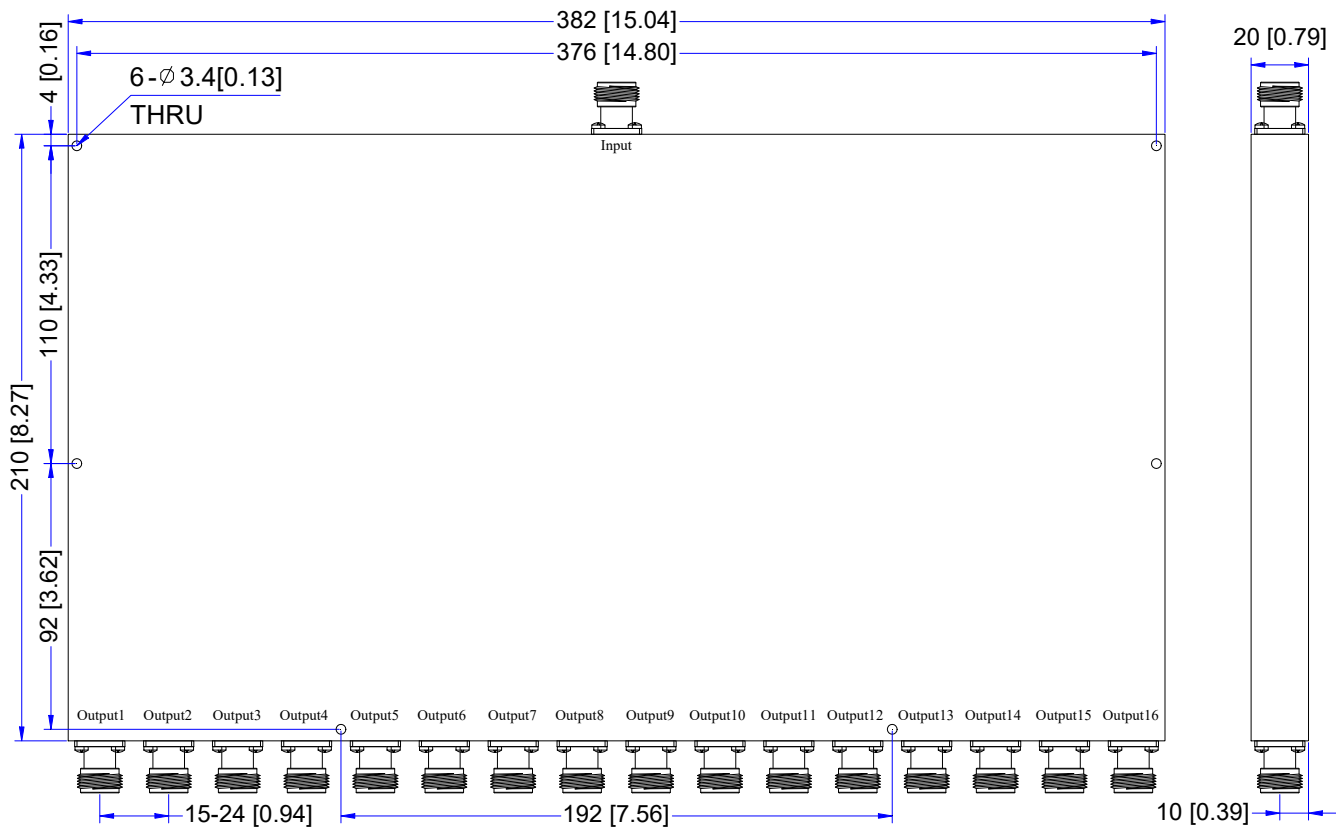

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com