

34-37GHz Broadband Power Amplifier

P/N: MZPA3437GA10W




■ Features

- Ultra Wide Band: 34-37GHz
- Gain: 50dB
- Output Power Psat: 41dBm
- Bias: Vd=12V;Id=10A

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

■ Electrical Specifications +25 °C

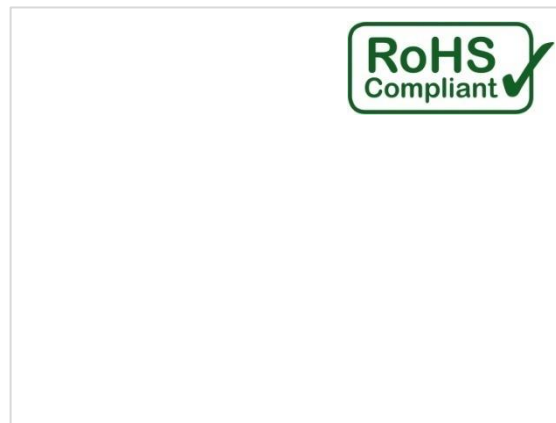

Parameter	Min.	Typ.	Max	Units
Frequency Range	34-37			GHz
Small Signal Gain	45	50		dB
Gain Flatness		±2		dB
Input VSWR		2.0		-
Output Power for 1 dB Compression (P1dB)	38	40		dBm
Saturated Output Power (Psat)	39.5	41		dBm
Input Max Power(no damage)			5	dBm
Internally Generated Spurious		-60		dBc
DC Current (Vcc=+12V) (@Pout=10W)		10	15	A
Impedance	50			Ω
Input Output Connector	2.92mm-Female			
Material	Aluminium			
Weight	-			
Dimension	282X145X24mm			

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

34-37GHz Broadband Power Amplifier

P/N: MZPA3437GA10W



■ Environmental Conditions

Operational Temperature	-45°C~+85°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave,3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C


■ Absolute Maximum Ratings

Supply Bias Voltage	+15V
RF INPUT POWER	+5dBm
ESD sensitivity (HBm)	Class 0, passed 150V



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

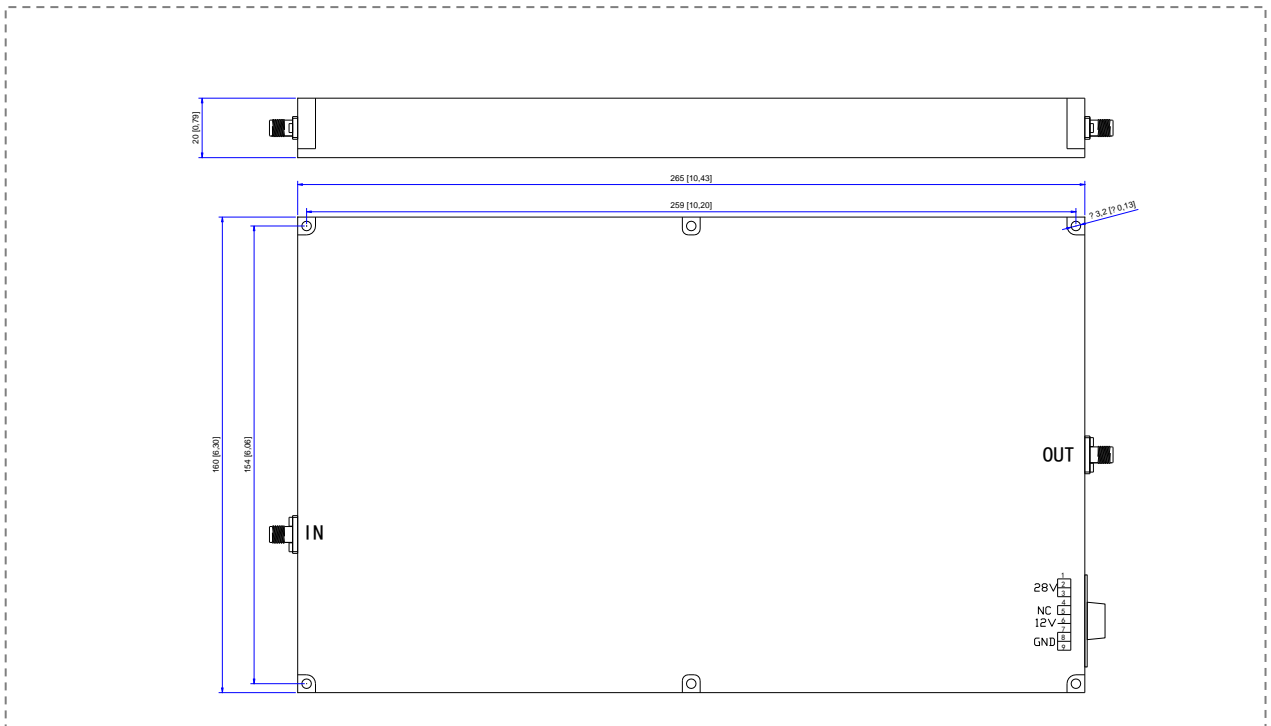

*****Heat Sink required during operation*****

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com