

# 0.02-6GHz Low Noise Amplifier

P/N: LNA000060GA30



### Description:

The amplifier is a low noise amplifier with a typical small signal gain of 33 dB and a typical noise figure of 3 dB across the frequency range of 0.02 to 6 GHz. The typical output power P-1 10 dBm. The DC power requirement for the amplifier is +12 VDC/200 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

### Electrical Specifications ( +25°C ) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		0.02-6		GHz
Gain	30	33		dB
Gain Flatness		±1	±2	dB
Gain Variation Over Temperature		±1		dB
Input VSWR		2.0		-
Output VSWR		1.5	2.0	-
Output Power for (P1dB)	8	10		dBm
Output Power Past		16		dBm
Noise Figure		3	4	dB
Output IP3		29		dBm
Input Max Power(no damage)		15	30	dBm
DC Current (Vcc=+12V)		200		mA
Impedance		50		Ω
Input/Output Connector		SMA-K/SMA-K		
Material		Aluminium\Gold Painting		
Weight		50g		
Package Sealing		Waterproof sealing ( IP67 )		

### Environmental Specifications:

- ※ Operational Temperature -20°C~+60°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE  
PRECAUTIONS ELECTROSTATIC  
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


# 0.02-6GHz Low Noise Amplifier

P/N: LNA000060GA30



## ■ Outline Drawing

All Dimensions in mm (inches) Tolerance  $\pm 0.25$  (0.01)

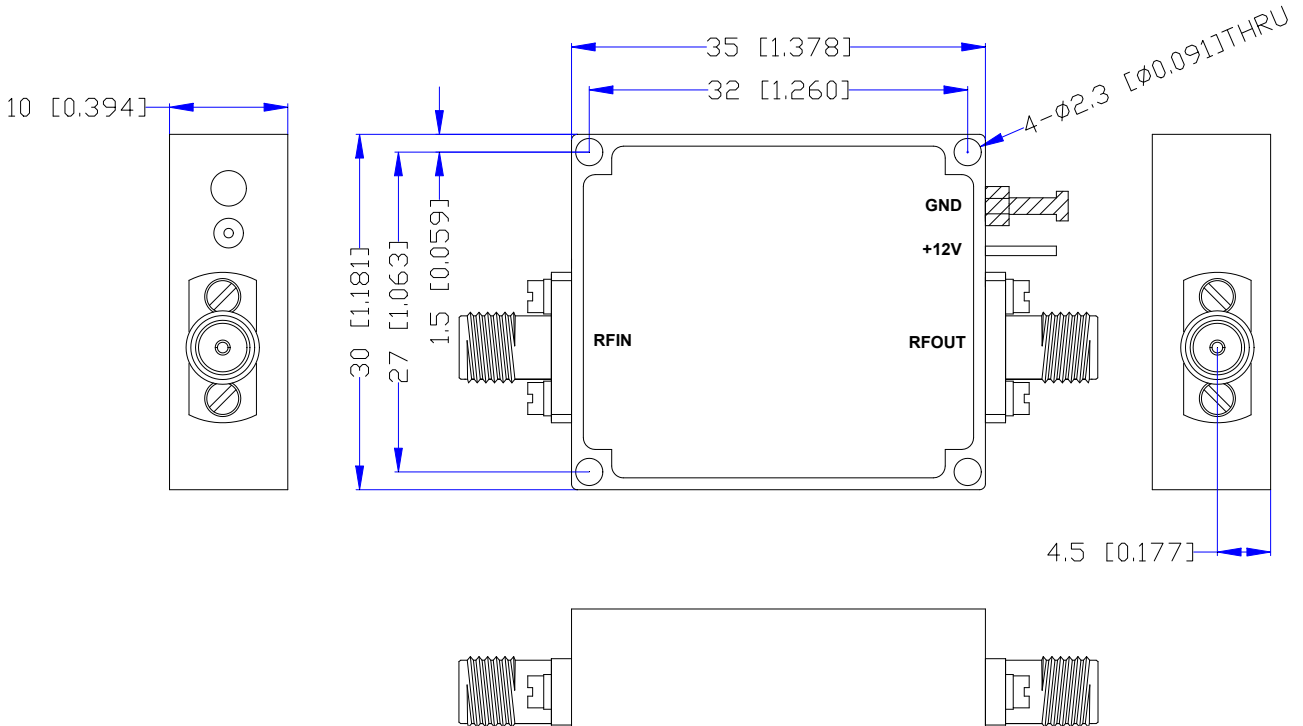

**\*\*\*Heat Sink required during operation\*\*\***

### NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

**MICZEN THCHNOLOGIES CO.,LTD.**

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com