

3.6-6.425GHz Low Noise Amplifier

P/N: LNA036065GA25



Description:

The amplifier is a low noise amplifier with a typical small signal gain of 25 dB and a noise figure of 3 dB across the frequency range of 3.6 to 6.425 GHz. The output power P-1 is 20 dBm. The DC power requirement for the amplifier is +12 VDC/240 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		3.6-6.425		GHz
Gain		25		dB
Gain Flatness		±1.0	±1.5	dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Output Power for (P1dB)	20			dBm
Spurious	60			dBc
Noise Figure		3		dB
Input Max Power(no damage)			5	dBm
DC Current (VD=+12V)		240		mA
Impedance		50		Ω
Input/Output Connector		SMA-Female/SMA-Female		
Material		Aluminium/Gold Plated		
Weight		/		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


3.6-6.425GHz Low Noise Amplifier

P/N: LNA036065GA25



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

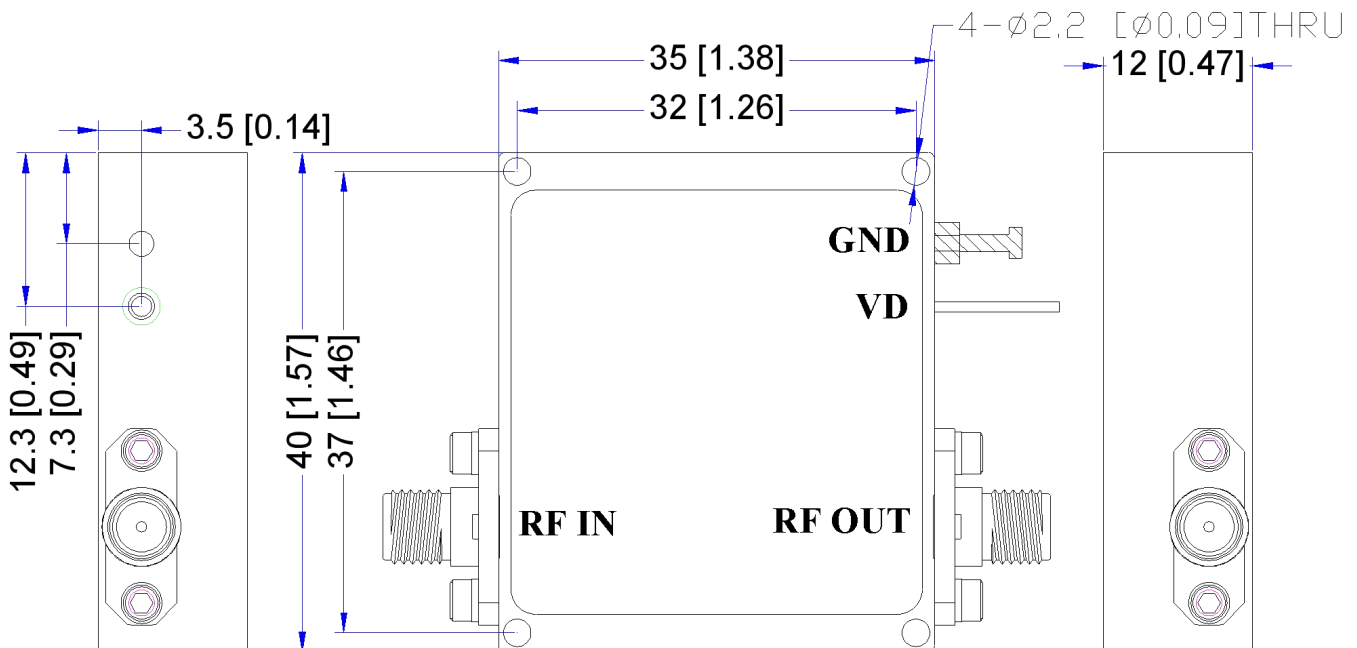

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com