


# 17.5-20.5GHz Low Noise Amplifier

P/N: MZLNA175205GA25



## Description:

The amplifier is a low noise amplifier with a typical small signal gain of 25 dB and a typical noise figure of 1 dB across the frequency range of 17.5 to 20.5 GHz. The typical output power P-1 23dBm. The DC power requirement for the amplifier is +15 VDC/500 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

## Electrical Specifications ( +25°C ) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		17.5-20.5		GHz
Gain	25			dB
Gain Flatness			±1.5	dB
Input VSWR			2.0	-
Output VSWR			2.0	-
Output Power for (P1dB)	23			dBm
Spurious		-60		dBc
DC Current (Vcc=+15V)		500		mA
Impedance		50		Ω
Input/Output Connector		SMA-Female/SMA-Female		
Material		Aluminium/Nickel Painting		
Weight		-		
Package Sealing		General Sealing (Standard)		

## Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE  
PRECAUTIONS ELECTROSTATIC  
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


# 17.5-20.5GHz Low Noise Amplifier

P/N: MZLNA175205GA25



## ■ Outline Drawing

All Dimensions in mm (inches) Tolerance  $\pm 0.25$  (0.01)

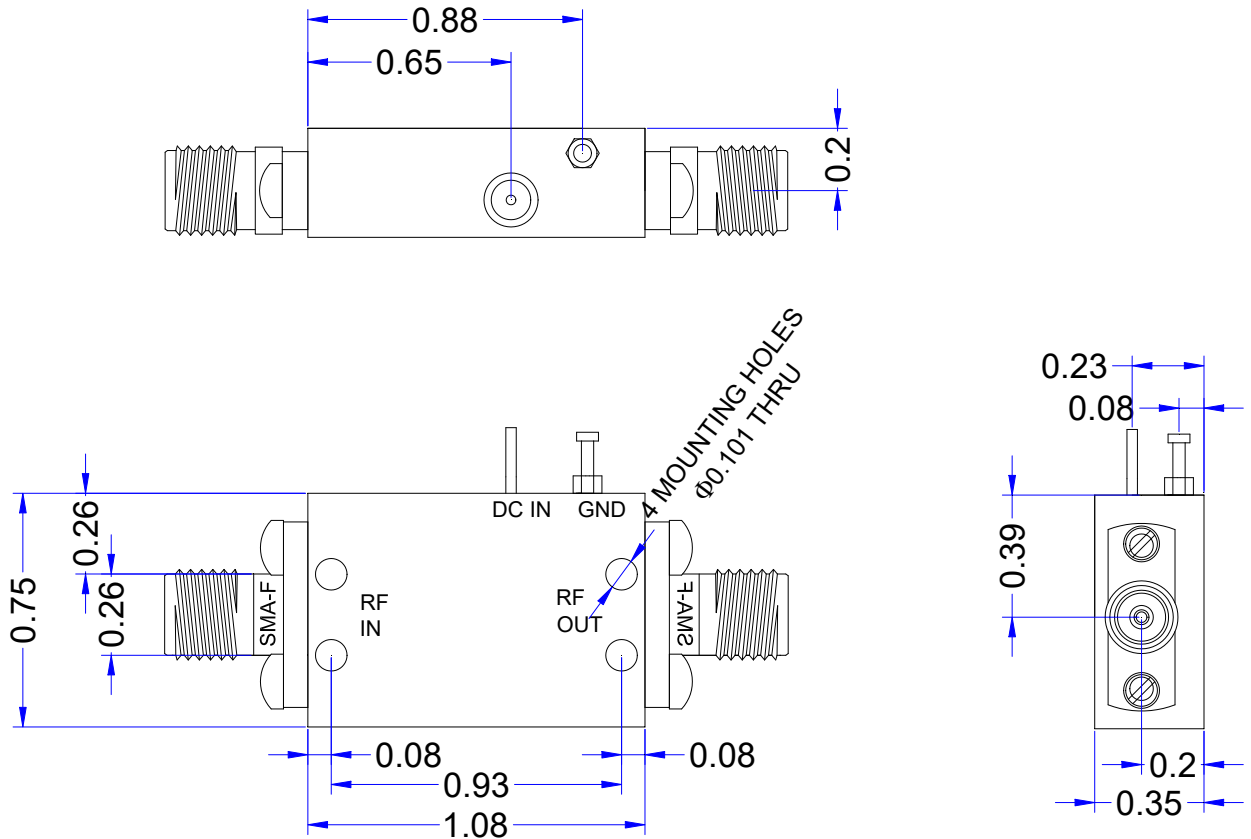

**\*\*\*Heat Sink required during operation\*\*\***

### NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

**MICZEN THCHNOLOGIES CO.,LTD.**


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

# 17.5-20.5GHz Low Noise Amplifier

P/N: MZLNA175205GA25



## Performance Plot

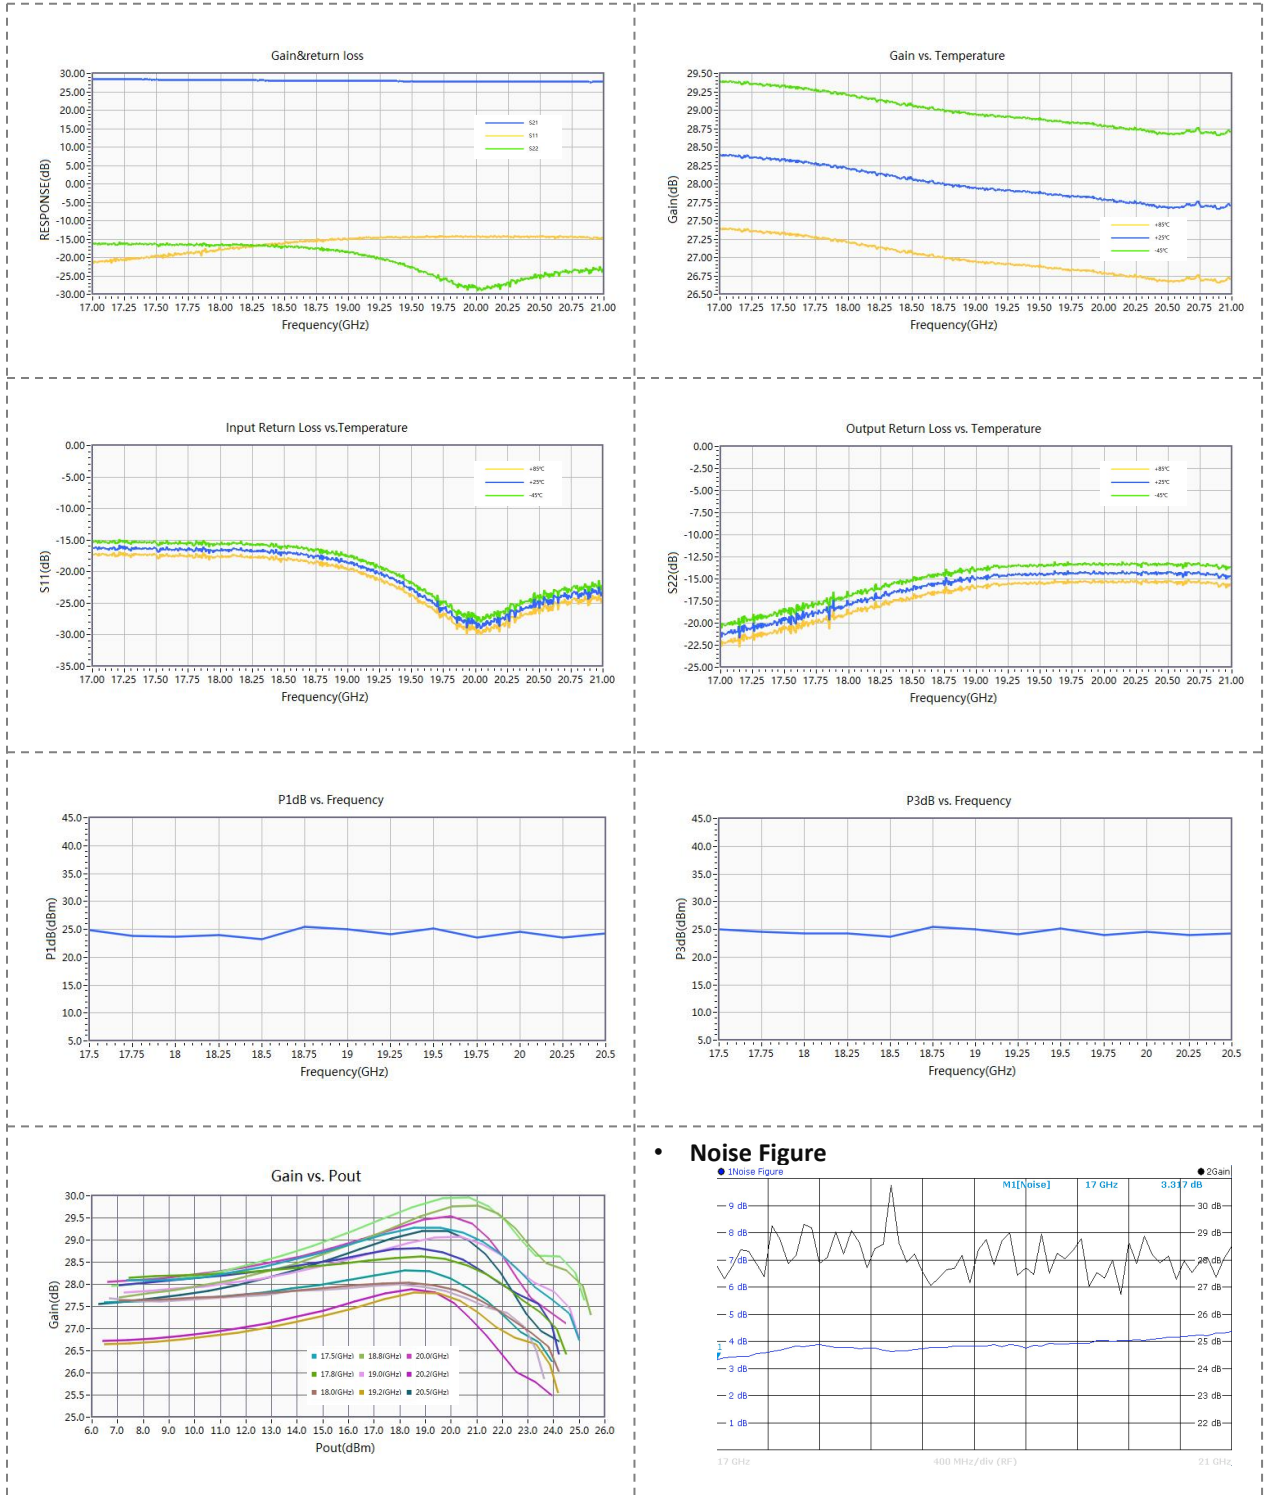

MICZEN THCNLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com