


18-26GHz Low Noise Amplifier

P/N: MZLNA1826GB30



Description:

The amplifier is a low noise amplifier with a typical small signal gain of 30 dB and a typical noise figure of 2.8 dB across the frequency range of 18 to 26 GHz. The typical output power P-1 15dBm. The DC power requirement for the amplifier is +9~15 VDC/22. mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		18-26		GHz
Gain	30			dB
Gain Flatness			±1.5	dB
Input VSWR			2.0	-
Output VSWR			2.0	-
Output Power for (P1dB)	15			dBm
Output IP3		25		dBm
Noise Figure			2.8	dB
DC Current (Vcc=+9~15V)		220		mA
Impedance		50		Ω
Input/Output Connector		SMA-Female/SMA-Female		
Material		Aluminium		
Weight		-		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


18-26GHz Low Noise Amplifier

P/N: MZLNA1826GB30



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

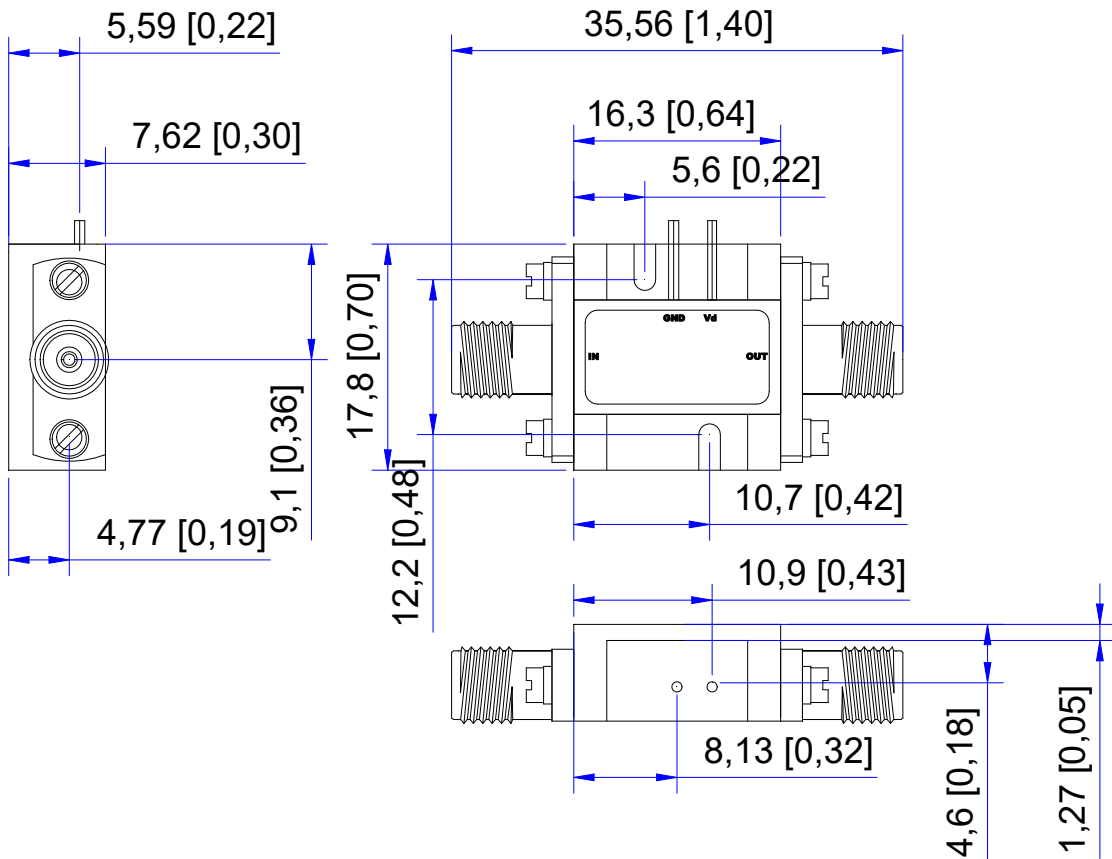

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com