


26-32GHz Low Noise Amplifier

P/N: MZLNA2632GA35



Description:

The amplifier is a low noise amplifier with a typical small signal gain of 35 dB and a typical noise figure of 2.5 dB across the frequency range of 26 to 32 GHz. The typical output power P-1 8dBm. The DC power requirement for the amplifier is +12 VDC/200 mA. Accept customization according to different needs.

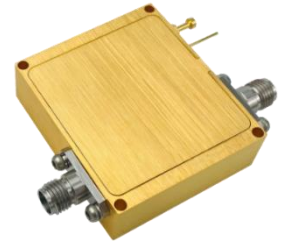

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		26-32		GHz
Gain	34	35		dB
Gain Flatness		±1.0	±1.5	dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Output Power for (P1dB)	5	8		dBm
Spurious		-60		dBc
Noise Figure		2.5	3.0	dB
Output IP3		15		dBm
Input Max Power(no damage)			-25	dBm
DC Current (Vcc=+12V)		200		mA
Impedance		50		Ω
Input/Output Connector	2.92mm-Female/2.92mm-Female			
Material	Aluminium/Gold Painting			
Weight	50g			
Package Sealing	General Sealing (Standard)			

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


26-32GHz Low Noise Amplifier

P/N: MZLNA2632GA35



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

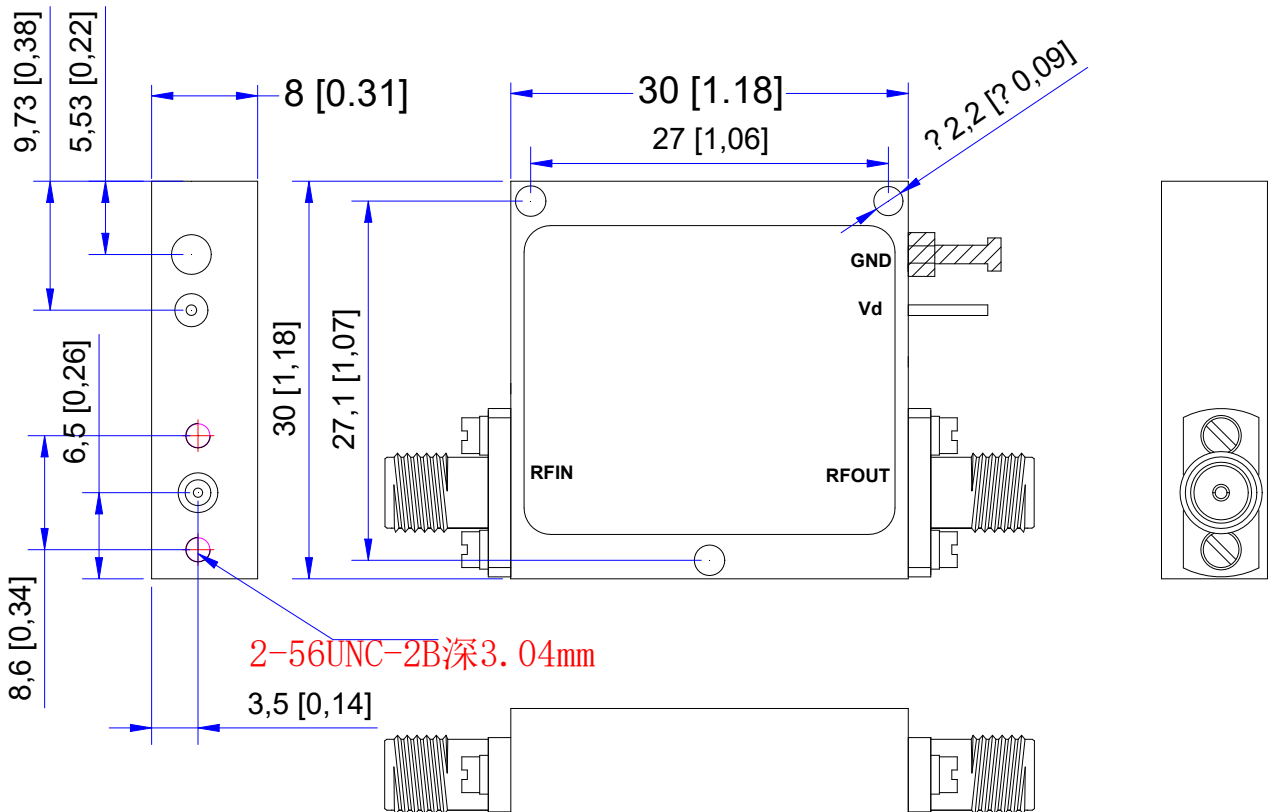

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

26-32GHz Low Noise Amplifier

P/N: MZLNA2632GA35



Performance Plot

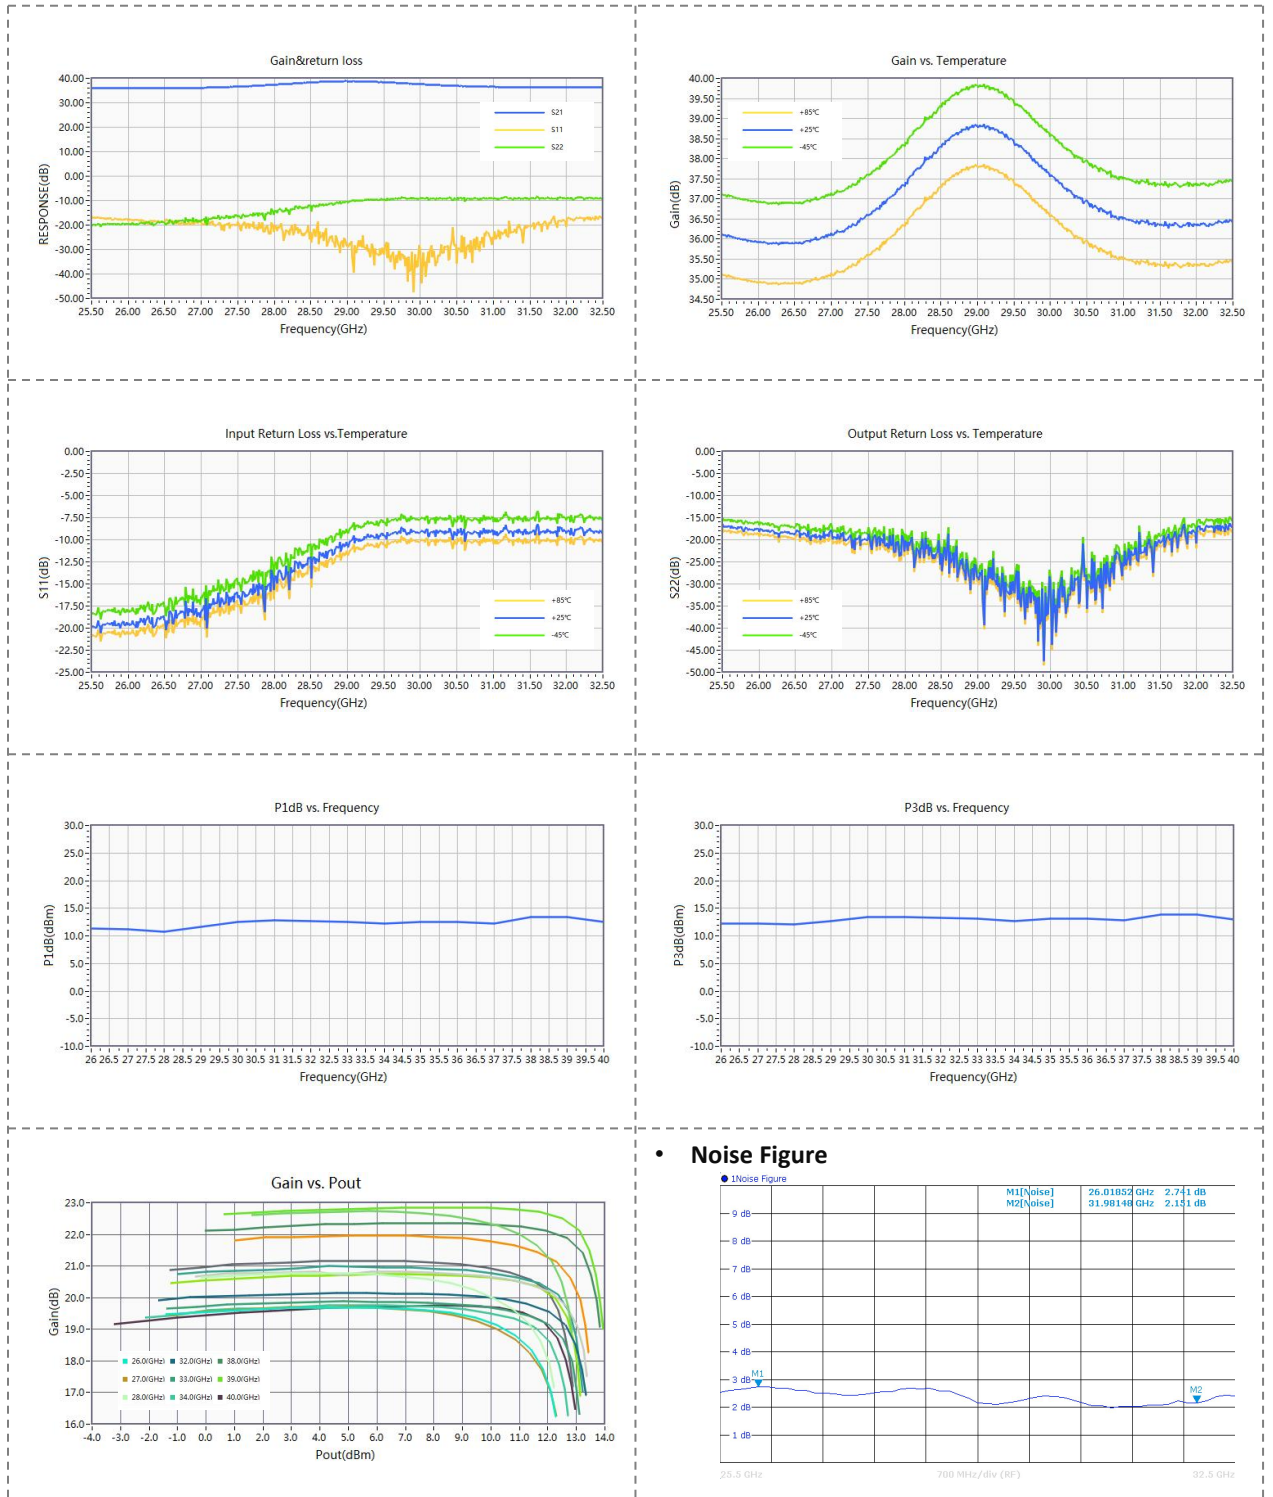

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com