

40-60GHz 1W Power Amplifier

P/N: MZPA4060GA1W



Description:

The power amplifier is a 1W power amplifier with a typical small signal gain of 35 dB across the frequency range of 40 to 60 GHz. The typical output power is 29 dBm. The DC power requirement for the amplifier is +6~+8 VDC/5 A. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		40-60		GHz
Gain	30	35		dB
Gain Flatness		±2.5		dB
Input VSWR		2.0		-
Noise figure		5		dB
Output Power Psat		29		dBm
Input Max Power(no damage)			10	dBm
DC Current (Vcc=+6~+8V)(@Pout=1W)		5	6.5	A
Impedance		50		Ω
Input/Output Connector	1.85mm-Female/1.85mm-Female			
Material	Aluminium\Gold Painting			
Weight	50g			
Package Sealing	General Sealing (Standard)			

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


40-60GHz 1W Power Amplifier

P/N: MZPA4060GA1W



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

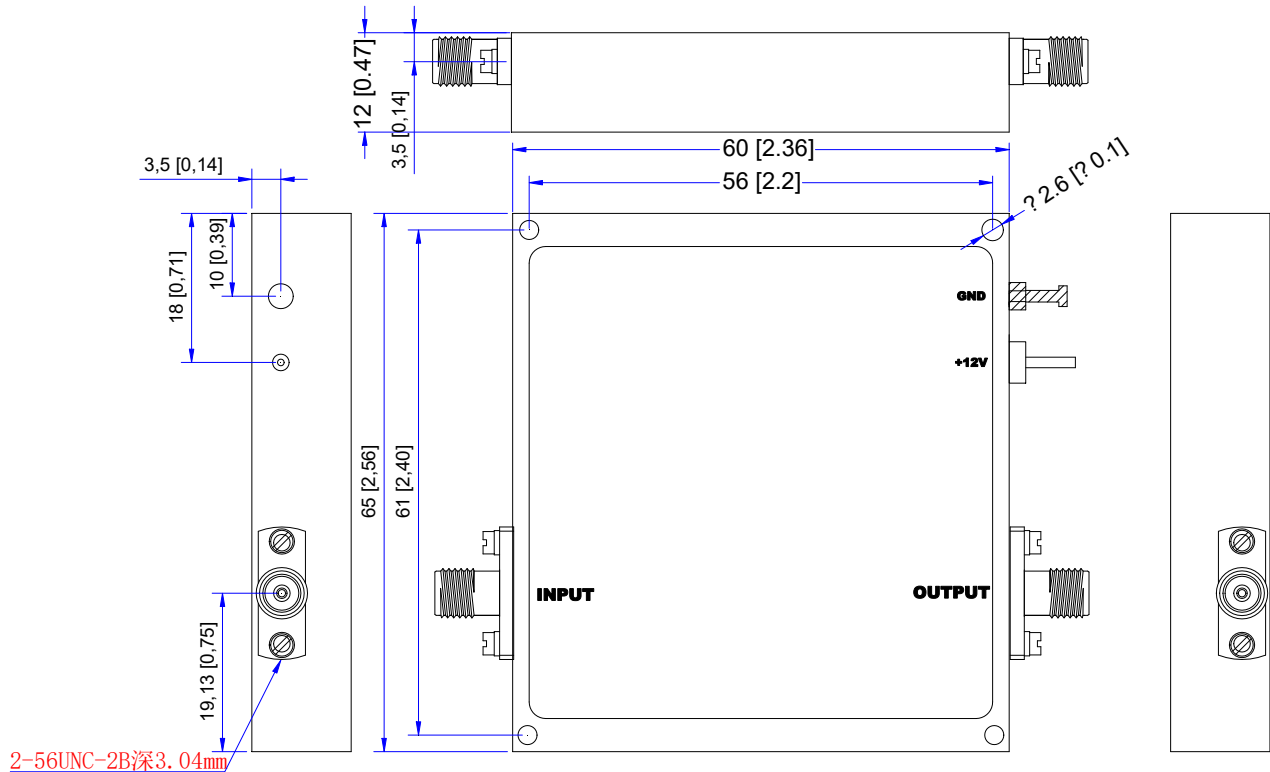

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com