

# 0.5-26.5GHz 3way Power Divider

P/N: P3005265GB



## Description:

The power divider is a 3way power divider with a typical insertion loss of 2.2 dB and a typical isolation of 12dB across the frequency range of 0.5 to 26.5 GHz. The power divider can reach handling power 20W. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

## Electrical Specifications ( +25°C ) :

| Parameter               | Min. | Typ.                 | Max. | Units |
|-------------------------|------|----------------------|------|-------|
| Frequency Range         |      | 0.5-26.5             |      | GHz   |
| Insertion Loss          |      |                      | 2.2  | dB    |
| Isolation @0.5-0.7GHz   | 12   |                      |      | dB    |
| Isolation @0.7-26.5GHz  | 16   |                      |      | dB    |
| Input VSWR @0.5-0.7GHz  |      |                      | 2.4  | -     |
| Input VSWR @0.7-26.5GHz |      |                      | 1.8  | -     |
| Output VSWR             |      |                      | 1.6  | -     |
| Phase Unbalance         |      |                      | ±7   | °     |
| Amplitude Unbalance     |      |                      | ±0.8 | dB    |
| Power Handling          |      |                      | 20   | W     |
| Impedance               |      | 50                   |      | Ω     |
| Connector               |      | SMA-Female           |      |       |
| Material                |      | Aluminum             |      |       |
| Weight                  |      | /g                   |      |       |
| Package Sealing         |      | Blue Color(Standard) |      |       |

## Environmental Specifications:

- ※ Operational Temperature -45°C~+85°C
- ※ Storage Temperature -55°C~+105°C



OBSERVE  
PRECAUTIONS ELECTROSTATIC  
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


# 0.5-26.5GHz 3way Power Divider

P/N: P3005265GB



## ■ Outline Drawing

All Dimensions in mm (inches) Tolerance  $\pm 0.25$  (0.01)

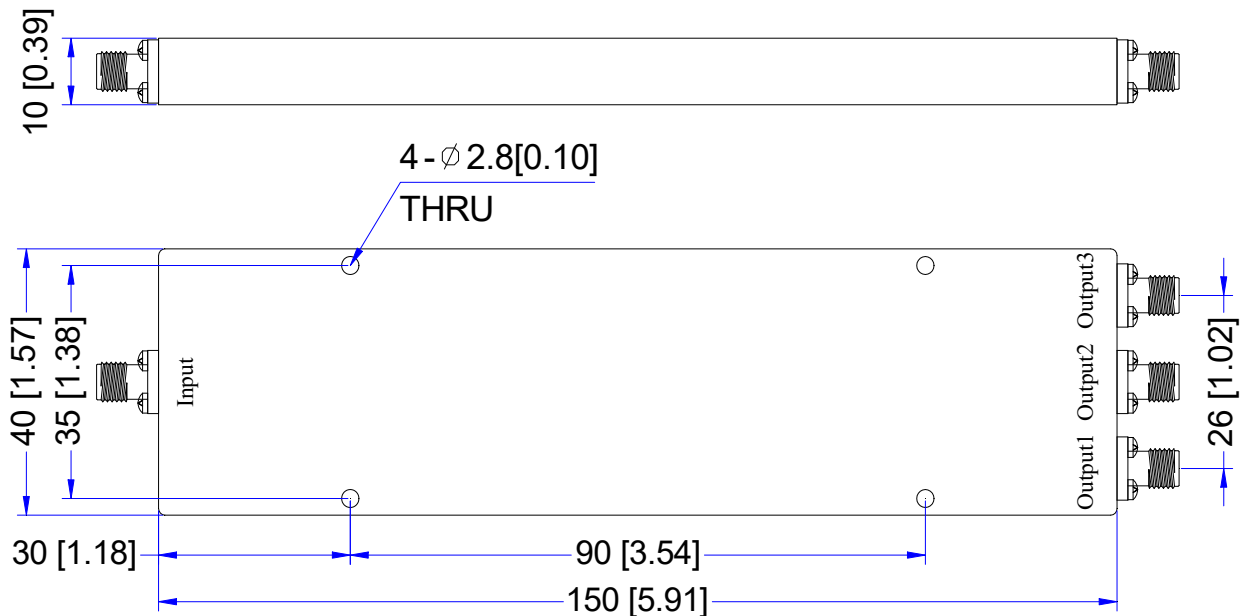

### NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com