

18-40GHz 0.5W Power Amplifier

P/N: PA1840GCC0.5W



Description:

The power amplifier is a 0.5W power amplifier with a typical small signal gain of 35 dB across the frequency range of 18 to 40 GHz. The typical output power P-1 27dBm. The AC power requirement for the amplifier is 220VAC/50Hz. . Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		18-40		GHz
Gain	30	35		dB
Gain Flatness		±2.5		dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Output Power for (P1dB)		27		dBm
Output Power Psat	27	28		dBm
Spurious		-60		dBc
Noise Figure		6		dB
Input Max Power(no damage)			0	dBm
AC power supply		220V/50Hz		-
Impedance		50		Ω
Input/Output Connector		2.92mm-Female/2.92mm-Female		
Material		Aluminium/Black anodizing		
Weight		1200g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -25°C~+85°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


18-40GHz 0.5W Power Amplifier

P/N: PA1840GCC0.5W



■ Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

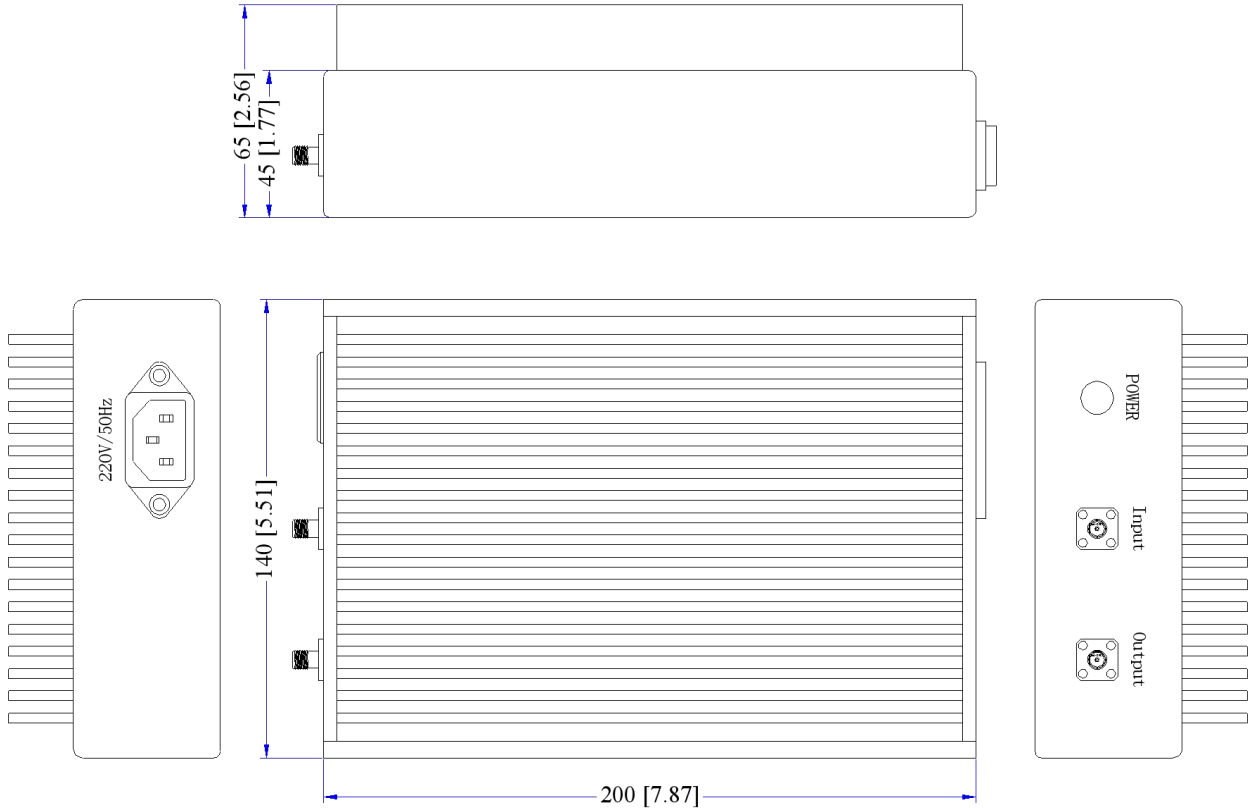

*****Heat Sink required during operation*****

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCHNOLOGIES CO.,LTD.


Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com

18-40GHz 0.5W Power Amplifier

P/N: PA1840GCC0.5W



Performance Plot

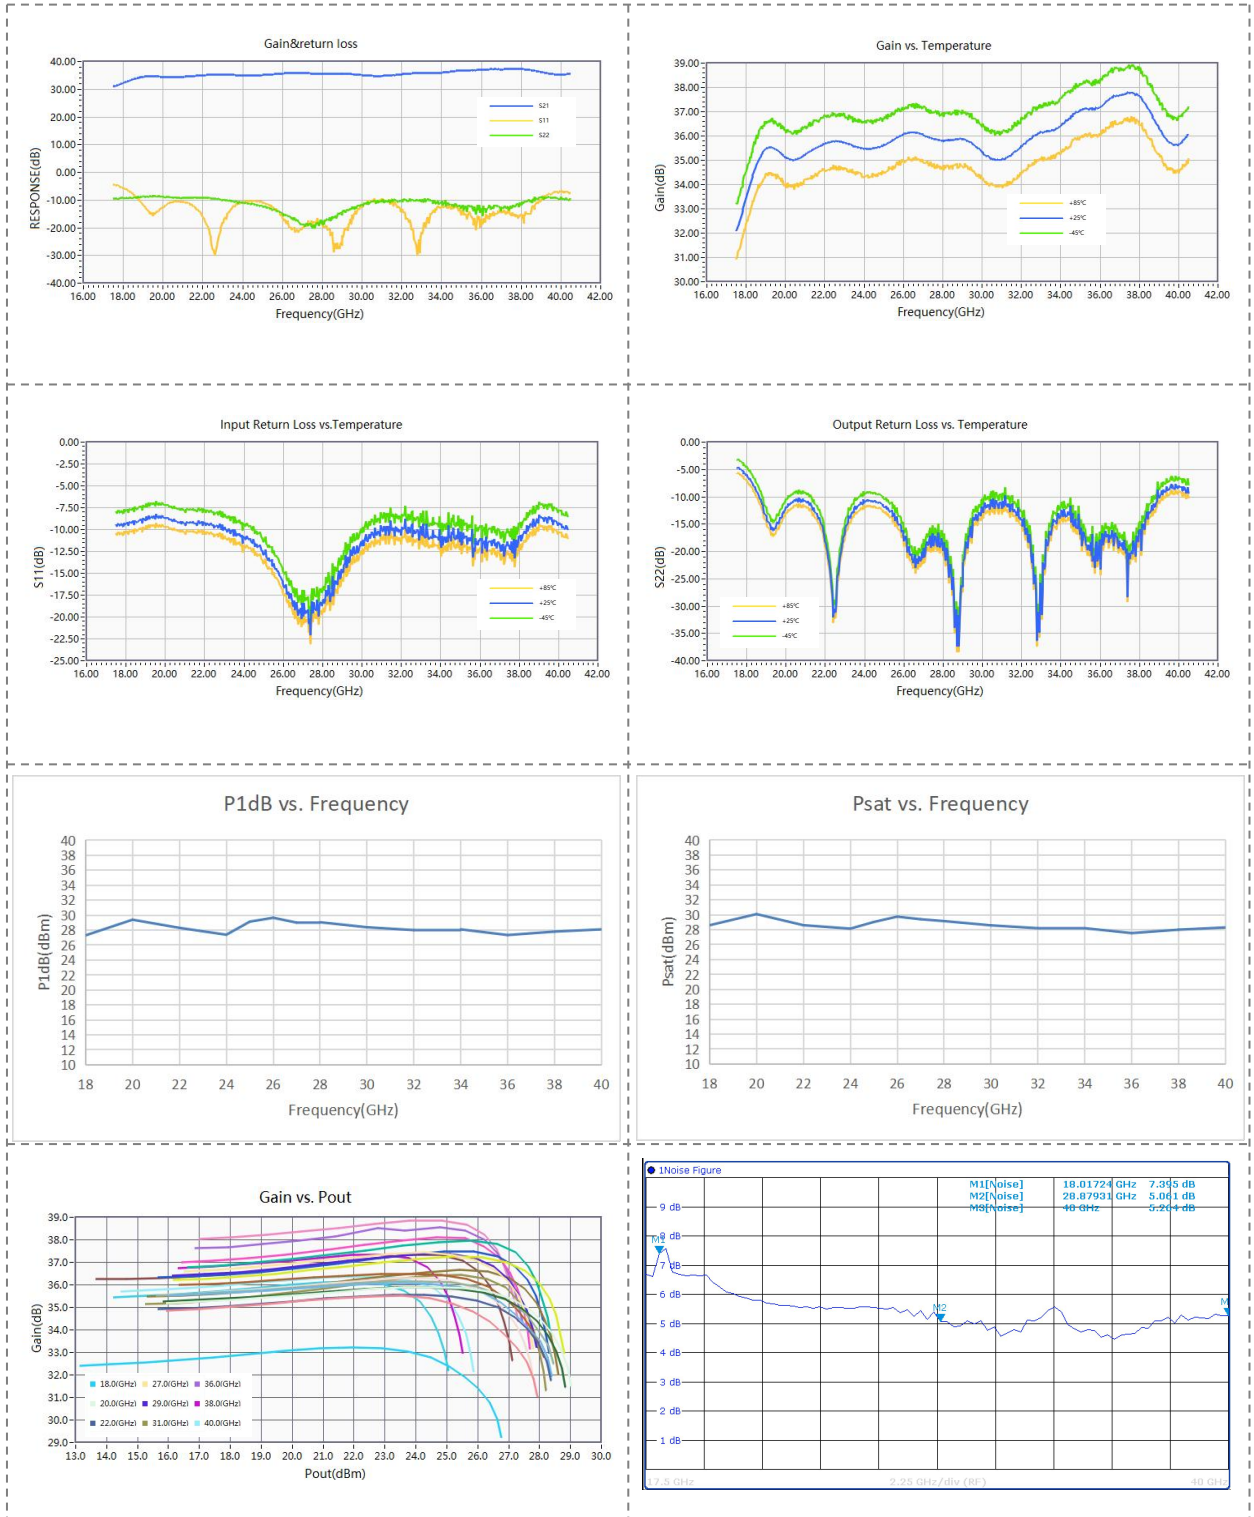

MICZEN THCNLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com