


18-26.5GHz Broadband Switch

P/N: SP4T18265GA50A



Description:

The switch is a broadband PIN switch with a typical Loss insertion of 3.0 dB and a high isolation of 50dB across the frequency range of 18 to 26.5 GHz. The typical switch speed 25ns. The DC power requirement for the switch is +/-5 V/50 mA. Accept customization according to different needs.



- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (+25°C) :

Parameter	Min.	Typ.	Max.	Units
Frequency Range		18-26.5		GHz
Insertion Loss			3.0	dB
Isolation	50			dB
Input VSWR		1.5	2.0	-
Output VSWR		1.5	2.0	-
Switch Speed		25	100	ns
RF Input Power			23	dBm
DC Current (Vcc=+/-5V)		50/50		mA
Control Logic		Solder Pin		-
Impedance		50		Ω
Input Output Connector		2.92-Female/2.92-Female		
Switch Type		Absorptive		
Material		Aluminium\Gold Painting		
Weight		30g		
Package Sealing		General Sealing (Standard)		

Environmental Specifications:

- ※ Operational Temperature -20°C~+70°C
- ※ Storage Temperature -55°C~+125°C



OBSERVE
PRECAUTIONS ELECTROSTATIC
SENSITIVE DEVICES

MICZEN THCHNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com


18-26.5GHz Broadband Switch

P/N: SP4T18265GA50A



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

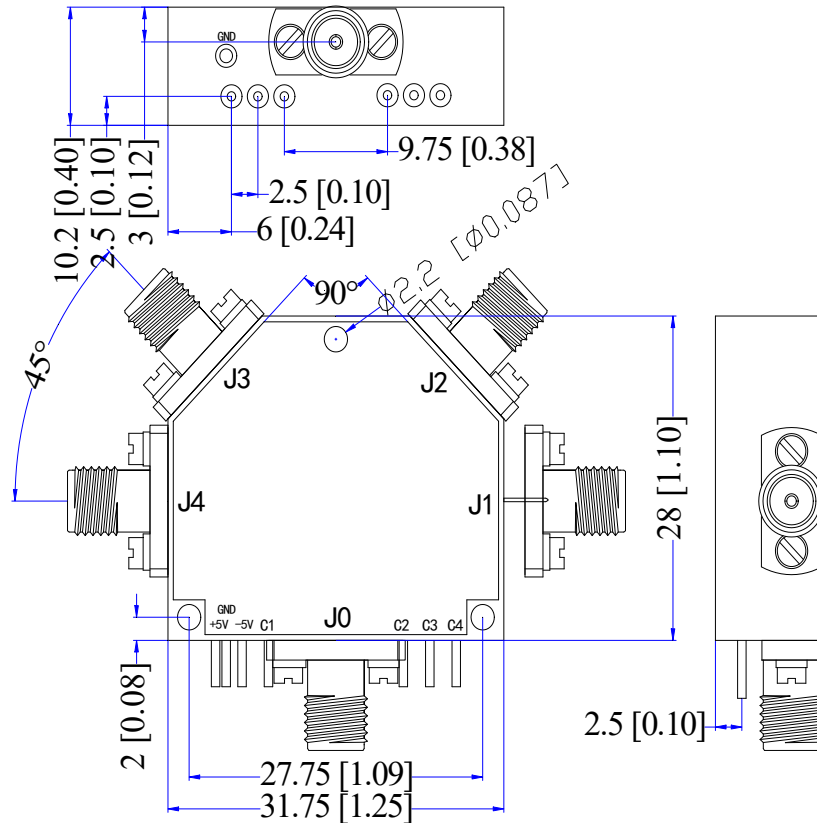

Truth Table				
TTL Control Input				Signal Path State
C4	C3	C2	C1	
1	1	1	0	J0-J1
1	1	0	1	J0-J2
1	0	1	1	J0-J3
0	1	1	1	J0-J4

TTL Control Voltages & VDD	
Stage	Bias Condition
VDD	+5V ($\pm 10\%$)
VEE	-5V ($\pm 10\%$)
Low(0)	0 to 0.8Vdc
High(1)	2.0 to +5.0Vdc

NOTE:

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Miczen technologies co., Ltd. reserves the right to change the above information without notice.

MICZEN THCNOLOGIES CO.,LTD.

Phone: +86 28 65003621 | E-mail: sales@miczen.com | Web: www.miczen.com